

Amended Preliminary Master Plan - Planned Unit Developement

Somerville,
Massachusetts

Prepared for Federal Realty Investment Trust
5 Middlesex Avenue, 4th floor
Somerville, Massachusetts, 02145

Prepared by **VHB/Vanasse Hangen Brustlin, Inc.**
Transportation, Land Development, Environmental Services
101 Walnut Street
P.O. Box 9151
Watertown, Massachusetts 02471-9151
617 924 1770

Date: May 2014



Table of Contents

Introduction	
Report, & Study Description	3
Existing Utility Conditions	4
Water Supply and Distribution Systems	
Existing Conditions	5
Proposed Conditions	7
Sanitary Sewer	
Existing Conditions	10
Proposed Conditions	11
Stormwater Drainage Design	
Existing Conditions	12
Proposed Conditions	13
Gas	
Existing Conditions	15
Proposed Conditions	15
Electrical Distribution System	
Existing Conditions	16
Proposed Conditions	16
Telephone Distribution System	
Existing Conditions	17
Proposed Conditions	17
Fire Alarm System	
Existing Conditions	18
Proposed Conditions	18
Cable TV	
Existing Conditions	19
Proposed Conditions	19
Summary	20



List of Figures

Figure 1: Site Location Map
Figure 2: Existing Water Demand
Figure 3.1: Existing Sewer Generation
Figure 3.2: Estimated Proposed Sewer Generation and Water Demand

Appendices

Appendix A Water System Analysis
Appendix B MWRA Meter 91 Readings
Appendix C Stormwater Drainage System Analysis

Introduction

1. INTRODUCTION

1.1 Report

This report is submitted in connection with the site plan submission entitled, "Amended Preliminary Master Plan, Planned Unit Development, Assembly Square Drive (APMP PUD ASD), Somerville, Massachusetts", dated May 2014 (the "Project") and the previously approved "Amended Preliminary Master Plan, Planned Unit Development, Assembly Square Drive (PMP PUD ASD), Somerville, Massachusetts", dated June 2010.

For Site Location Map refer to Figure 1.

For existing utilities referenced in this report please refer to the drawings in the Site Plans entitled:

- Utility As-Builts SV-1 thru SV-13 dated March 9, 2012

For proposed utilities referenced in this report please refer to the drawings submission entitled:

- Grading, Drainage and Utility Plans 1 thru 5 dated May 2014.

1.2 Study Description

This report confirms and updates findings in a report by Green International Affiliates, Inc., (GIA), which analyzed for the Somerville Office of Housing and Community development (OHCD), all existing utilities, and future improvements within the Assembly Square Revitalization Area (ASRA). The GIA report is entitled "Utility Analysis Report (UAR) for Assembly Square Revitalization Area Somerville, Massachusetts" and was completed in November, 2001. The report describes the locations, sizes and capacities of the following existing utility systems: sanitary sewers, water mains, storm-water surface drainage, telephone, gas, electric, cable TV, communication and fire alarms. The OHCD developed a potential build-out scenario in that report for the entire ASRA which was used as the base for the existing utility analyses and to identify the necessary improvements needed to support the potential build-out.

This report confirms the existing utility findings in the GIA Report and suggests proposed utility improvements in a similar format as was presented in the GIA report to support this Project.

This report was prepared using some of the information contained in the 2001 GIA Utility Analyses. In order to avoid repeated references to the GIA 2001 Utility Analyses, this report contains all the utility existing information, data and analyses that are valid for current conditions. Any additional information regarding existing utility information that has been recognized since the previously approved PMP PUD is also reflected in this report.



1.3 Existing Utilities

Existing utilities information within the PUD area were obtained from actual on the ground instrument survey performed by Vanasse Hangen Brustlin, Inc. (VHB) in March of 2010 and March of 2012. Some underground utilities are based on field observation and information of record. They are not warranted to be exact.

1.4 Existing Utility Improvements follow-up

The master developer, Federal Realty Investment Trust, has constructed all necessary utility infrastructure for the full buildout of the Project in the proposed streets of the PUD area in 2010 and 2012.

Water Distribution System

Existing Conditions

2 WATER SUPPLY AND DISTRIBUTION SYSTEM

2.1 Existing Water Supply and Distribution System

The City of Somerville owns and maintains the public water distribution system that services the Assembly Square Revitalization Area (ASRA). The City's water distribution system supplies both domestic and fire protection water to the area. This system is part of a city-wide interconnected network that is supplied by the Massachusetts Water Resources Authority (MWRA) through seven metered connections. The City is supplied by both MWRA's high service and low service pressure systems. The water distribution system within the Assembly Square area is part of the City's low service system.

MWRA Meter 91 is located at the intersection of the Fellsway West and Middlesex Avenue and provides the closest supply of water to the Assembly Square area from a 48-inch cast iron water main located in Middlesex Fells Parkway (Fellsway). The City does not have any water storage facilities or any pumping stations that service this area.

The MWRA has performed water main improvements to Meter 91 and the existing 48-inch water main located in Middlesex Fells Parkway. The water main improvements consisted of cleaning, cement-mortar lining, internally sealed joints, 48-inch restrained joint pipe and valving.

Information provided by the MWRA concerning Meter 91 is as follows:

The Average Hydraulic Grade Line Elevations is 184 ft. (Boston City Base Datum)

Refer to Appendix "B" for the MWRA Meter 91 water readings and Somerville's total daily water flows between 2004 and 2006.

The existing system is comprised of water mains ranging in age from 1917 to 1982 and in varying conditions. The water distribution system is described as follows:

- More that half of the system was installed in the 1920's while most of the remaining mains were installed during the 1970's and 1980's.
- The City's water mains sizes are all 8-inch diameter and larger which meets the minimum recommended size for adequate fire flows.
- The primary connection to the MWRA meter is a 20-inch diameter cast iron main installed in 1925 by the City within and along Middlesex Avenue.
- Several branch lines of varying diameter feed off the 20-inch main between Middlesex Avenue and the Fellsway.
- The remainder of the system along Foley Street, Assembly Square Drive and Mystic Avenue consist of a 12-inch diameter pipe interconnected to create several loops.



- The piping network in this area, for the most part, was installed to create a looped system around buildings sites and is interconnected to the city-wide network at several locations.
- The piping has generally been installed within the limits of the City's roadway system and has sufficient valving at most intersections to facilitate isolation and redirection of the flow during emergency or maintenance situations.
- As part of the ongoing approved work a portion of the existing 12-inch water main within Assembly Square Drive was replaced due to its poor condition. Also, a 20-inch water main has been constructed within Foley Street and the future extension of Assembly Square Drive in order to service the future development.

2.1.2 Existing Water System Demands

Average Day and Maximum Day Demands

Currently, the ASRA is primarily being used for retail, office and industrial purposes. Existing water demand was calculated for the average day and the maximum day demand based on the existing uses that make up the ASRA. Based on existing information the flow rates calculated for the existing uses for the average day demand and maximum day demand were 64 GPM and 115 GPM, respectively.

Needed Fire Flow

The water system within the Project area provides both domestic and fire flow water supply. The City's existing water distribution network within this area has, on average, fire hydrants located 300 feet apart throughout the entire area. This spacing meets the typical maximum recommended distance between hydrants in an urban setting.

The minimum Needed Fire Flow (NFF) for MWRA Meter 91 and maximum Insurance Services Office (ISO) requirements for a Community are:

	<u>Fire Flowrate</u>
Estimated minimum NFF requirements to be supplied by MWRA for meter 91:	2,000 gpm
Maximum requirements a community is required to supply according to the ISO:	3,500 gpm

The required minimum residual pressure at any location within the distribution system during a fire flow situation is 20 psi.

2.1.3 Existing Water System Analysis

Computer hydraulic analysis was performed by GIA, and confirmed by VHB, for the existing ASRA area water distribution system to determine system capacity and to provide a baseline for comparison of future system demands. The analysis included a limited computer network model on order to simulate several scenarios including:

1. Existing Average Day Demand
2. Existing Maximum Day Demand
3. Existing Maximum Day Demand Plus 2,000 gpm Fire Flow

The computer hydraulic analysis has indicated that the existing system has sufficient capacity for all scenarios.

Proposed Conditions

2.2 PROPOSED WATER SYSTEM

2.2.1 Proposed System Demands

The full build out of Amended Preliminary Master Plan within the Project area will result in an increase in the water demands on the existing system. The future average day flowrates and maximum day flowrates were developed by utilizing proposed land use areas as shown in Figure 3.2.

2.2.2 Proposed System Analysis

VHB performed a preliminary computer hydraulic analysis of the proposed conditions utilizing information obtained from the MWRA and hydrant flow test information to further explore the availability of water flow at the higher flow rate set by the ISO. The computer model was calibrated based on a hydrant flow test performed by VHB on September 13, 2006, at the intersections of McGrath Highway and Kensington Avenue with Middlesex Avenue. This hydrant is connected to the 20-inch water main in Middlesex Avenue. The hydrant flow test computation converted to a base of 20 psi resulted in a flow of 5,645 gpm. Since the previously approved PUD PMP, VHB performed additional hydrant flow tests on March 14, 2007 and August 18, 2011 in order to further refine and confirm the computer model. Refer to Appendix "A" for hydrant flow test computations.

A preliminary hydraulic analysis was performed for future demands on the existing/proposed water distribution systems. The analysis includes utilizing the Future conditions model and performing several scenarios including:

1. Future Average Day Demand	704 gpm
2. Future Maximum Day Demand	1,060 gpm
3. Future Maximum Day Demand Plus 2,000 gpm Fire Flow	3,060 gpm
4. Future Maximum Day Demand Plus 3,500 gpm Fire Flow	4,560 gpm

A fire flow of 3,500 gpm is the maximum requirement a community is required to supply according to the ISO standards.

Based on VHB analysis the Future Maximum Day Demand and 3,500 gpm fire flow can be achieved within the Project area after the proposed water improvements are constructed.

2.3 Proposed Water System Improvements

The following proposed water mains will be installed or have already been constructed as part of the ongoing approved work in order to provide loop connections throughout the Assembly Square PUD area.

- Connected a new 20-inch water main from the existing 20-inch water main in Middlesex Avenue, continued along the future extension of Assembly Square drive to Foley Street then continued west along Foley Street to Middlesex Avenue where the new 20-inch water main was connected back into the existing 20-inch water main in Middlesex Avenue. The newly constructed 20-inch main in Foley Street replaced the existing 12-inch water main installed in 1928.



- Extended water mains, ranging in size from 8 to 20-inch, from the newly constructed 20-inch water main in Grand Union Boulevard along Artisan Way, Great River Road, Canal Street, Foley Street and Revolution Drive where they are interconnected in order to create multiple looped systems.
- Loop a proposed 12-inch water main on the Parcel 11A site from the recently replaced 12-inch water main in Grand Union Boulevard to Revolution Drive.

Sanitary Sewer

Existing Conditions

3.1 Existing Sewer System

The City of Somerville owns and maintains the sanitary sewer system in the ASRA area. The sanitary sewer system within the area is a separated system with storm drainage collected in an independent system.

All of the master planned sanitary sewer mains have been installed in the ASRA. The pipe starts as an 8" at the north end of the Site. The pipe sizes increase to an 18" as they discharge towards the southern end of the Site. The reconfigured and reconstructed sewer system in N. Union Street connects to a 24" pipe prior to discharging to the City of Somerville Regulator Manhole, which is the connection to the MWRA system.

Proposed Conditions

3.2.1 Proposed Sewer System

All of the sewer mains in the ASRA have been constructed as part of the previous construction phases of the project. All of the improvements have been consistent with the Preliminary Master Plan and PUD approval processes. The total amount of sewer flow from the project is essentially unchanged. The distribution of the sewer flow to the system is also basically unchanged. The sewer system has adequate capacity to handle the sewer flows from the project as proposed.

3.2.2 Proposed Sewer System Analysis

The average daily wastewater flows rates used in the analysis are based on Commonwealth of Massachusetts, Sewer System Extension and Connection, regulation 314 CMR 7. Wastewater peak flows rates were determined by multiplying the average daily flow by a peaking factor of four. The proposed land use areas and calculated flow rates are shown on Figure 3.2. The proposed development in the PUD-ASD area will increase wastewater flows to the MWRA interceptor sewer.

3.2.2 Proposed System Improvements

Based on the sewerage flows generated by the proposed development it was necessary to replace the existing 12-inch sewer lines within Assembly Square Drive with proposed 18-inch and 12-inch sewer trunk lines. These improvements have already been made as part of the ongoing approved work. The total peak sewer flows from the proposed development will generate 3.11 +/- mgd. The 18-inch sewer trunk line has a design capacity of 5.1 +/- mgd at a slope of 0.003 +/- with an average velocity of 5 ft per second. The 18-inch sewer trunk line



will have the capacity to handle all peak sewer demands of the Proposed Development with an excess capacity of 2.0 +/- mgd.

To address existing sewer configuration issues at the intersection of Assembly Square Drive and North Union Street, the following new sewer alignment and connections were constructed and are shown on the submitted PUD drawings:

- The new 18-inch trunk line within North Union Street will pick up the sewer flows from the existing 12-inch sewer, which collects sewer discharge from the Home Depot and Circuit City at SMH 32.
- The installation of a Special Drop Sewer Manhole will be constructed over the existing 24-inch sewer and 18-inch metal sewer at the existing drop connection of the existing 12-inch sewer. The new 18-inch trunk line connects into the Special Drop Sewer Manhole.

3.2.4 Sewer Mitigation

The Project has received two Sewer Extension and Connection Permits from DEP for discharging into the municipal and MWRA collection system. The first permit was approved on October 8, 2009 (Permit No. X229252) and included details of the sewer mitigation plan. Mitigation to offset flows is required to be implemented as part of the conditions for granting the connection. The mitigation program has been approved by the reviewing agencies. The second permit dated November 10, 2011 (Permit No. X239330) was for the connection of additional flow from a new phase of the development consistent with the master plan. A sewer permit application for the remaining flows from the entire project has been reviewed and approved by the City of Somerville Engineering and DPW departments. The proposed mitigation for the entire project has remained unchanged.

The mitigation took measures to reduce and/or eliminate non-sanitary sewerage flows, including the completed sewer improvements in Assembly Square Drive, the completed improvements in Foley Street and Mystic Avenue, off-site improvements completed in the Ten Hills neighborhood, removal of illicitly-connected catch basins on Mystic Avenue, Lombardi Street and Broadway, reduction of flows into the Somerville Marginal Conduit and a financial contribution to the City of Somerville in the form of funds specifically designated for I/I improvements.

The specific inflows and infiltration to be removed from the system are as follows:

Total Build Out (District A-1 and B-1 minus Yacht Club)

Proposed Project Added Total Sewer Flows =	777,116 gpd
Minus Existing Redeveloped Areas within District B-1 =	30,361 gpd
Proposed Net Increase in Sewer Flows=	746,755 gpd
Required DEP 4:1 Mitigation=	2,987,020 gpd

Proposed Mitigation @4:1 (Completed)

- The proponent has constructed improvements in the Ten Hills Area including sewer main replacement, sewer manhole replacement and pipe lining to complete the Sewer Inflow and Infiltration mitigation requirements for 610,000 gallons.
- Infiltration into the existing vitrified clay sewer pipes within the entire PUD area has been eliminated with the installation of approximately 1,800 feet of new 18-inch sewer pipes and 3,400 feet of 12-inch sewer pipes. Flow metering of existing pipes determined the potential for elimination of 78,000 gallons per day. The conditions of the sewer extension permit require future flow monitoring to determine if this volume reduction has been achieved.



- Disconnection of illicitly-connected catch basins on Mystic Avenue, Lombardi Street and Broadway that will remove approximately 294,000 gallons per day has been completed.
- Approximately 1,200,000 gallons per day will be removed from the Somerville Marginal Conduit by stormwater improvements in the PUD.
- The proponent has made a financial contribution to the City of Somerville specifically designated for Infiltration/Inflow removal projects, offsetting 810,000 gpd of new sewer flows.

Summary:

• Proposed Project Total Sewer Flows =	777,116 gpd
• Required Mitigation =	2,987,020 gpd
• <u>Mitigation Description</u>	<u>Sewer Flows</u>
Ten Hills Area =	610,000 gpd
I/I reduction from existing PUD sewers =	56,000 gpd
Illicitly Connected CB disconnection =	73,553 gpd
Removal of flows from SMC =	1,200,000 gpd
<u>Financial Contribution offset =</u>	<u>1,047,467 gpd</u>
Total = 2,987,020 gpd	

Stormwater Drainage System

Pre-Existing Conditions

4.1 Pre-Existing Drainage System

In 2001 Green International Affiliates, Inc. (GIA) prepared a Utility Analysis Report (UAR) of the Assembly Square Revitalization Area for the City of Somerville, Office of Housing and Community Development (OHCD). This report contains an inventory and analysis of the existing stormwater drainage infrastructure as well as some recommendations for drainage improvements during future development of the area. The GIA Report was used in conjunction with field survey information to analyze the existing stormwater drainage system for this Amended Preliminary Master Plan, Planned Unit Development (PUD) submission.

The proposed Project Site is located on Assembly Square Drive in the City of Somerville, Massachusetts. The majority of the Project Site was previously covered with existing buildings, roadways, and parking lots or areas that were previously developed and demolished. The Project Site is generally flat, ranging from approximate elevation 9 feet (NGVD) to 12 feet (NGVD) with the exception of a portion of Assembly Square Drive that slopes rapidly to reach an elevation of 30 feet (NGVD) at its connection to Mystic Avenue. The majority of the Project Site is covered by impervious or near-impervious surfaces. NRCS Soil Maps for Middlesex County (NRCS Web Soil Survey, 4-13-95) show the existing soils to be Urban land with wet substratum (603) and Udorthents with wet substratum (655). Geotechnical information available at the time of this report classifies the soils as hydrologic soils group D, which has low infiltration potential. Detailed soils information and a soils map are included in Appendix C. The cover condition and soils present in the Project Site result in minimal infiltration of stormwater under existing conditions. Areas at the north and east of the Project Site that were historically occupied with railroad and manufacturing facilities are currently vacant or unmaintained. Under pre-existing conditions, much of the stormwater collected in the Project Site discharges untreated to the existing Massachusetts Water Resources Authority (MWRA) 84-inch Somerville Marginal Conduit (SMC) or to the Mystic River as overland flow or via pipe upstream of the Amelia Earhart Dam. The MWRA 84-inch SMC discharges downstream of the Amelia Earhart Dam to the tidally influenced portion of the Mystic River. Stormwater runoff discharging to the MWRA 84-inch SMC has been an ongoing area of concern for the MWRA as the SMC currently acts as a combined sewer overflow (CSO) during some large storm events and high tide conditions at the outfall.

Under current conditions, a new dedicated 72-inch drainage outfall discharges downstream of the Amelia Earhart Dam to redirect stormwater flows and to help alleviate the potential for CSOs into the Mystic River. This is consistent with the goals for improving water quality in the Mystic River.



Proposed Conditions

4.2 Proposed Stormwater Management System

The Project was designed to comply fully with the Massachusetts Stormwater Management Regulations for a re-development project and the applicable City of Somerville requirements. The Proponent constructed improvements to existing roadways, construction of new roadways and drives, expansion of the DCR waterfront park and the expansion and upgrade of underground utility infrastructure. The proposed design includes LID and water quality measures that will protect the surrounding natural resources, as described in this report, from degradation as a result of stormwater runoff.

The design options for the storm drain system required close consideration of the adjacent properties, including the MBTA Orange Line, the existing DCR waterfront park and existing commercial uses. Another key consideration of the storm drain system in the Assembly Square area is the existing 36-inch connection to the MWRA 84-inch SMC. As previously mentioned, during large storm events and high tide conditions at the SMC outfall, the SMC has historically experienced combined sewer overflows into the non-tidal portion of the Mystic River, upstream of the Amelia Earhart Dam. In order to avoid any increased impacts to the MWRA 84-inch SMC, it is proposed to abandon the existing 36-inch connection to the MWRA 84-inch SMC and construct a new 72-inch storm drain trunk line that will discharge at a new outfall downstream of the Amelia Earhart Dam, in the tidal portion of the Mystic River. The MWRA has analyzed the benefits that the disconnection of the 36-inch pipe will have on the MWRA 84-inch SMC. This new storm drain trunk line includes a tide-gate near the outfall to prevent tidal waters from entering and surcharging the new drainage system during periods of high tide.

The new trunk line proposed for the Project was constructed within the extension of Foley Street, and then continued under the MBTA tracks and through property owned by the Commonwealth of Massachusetts. A portion of this pipe was constructed in 2009 as part of the infrastructure necessary for the approved Phase 1-AA. See attached plans for the location of the 72-inch storm drain outfall. This design will significantly decrease stormwater runoff to the Mystic River above the Amelia Earhart Dam, and eliminate stormwater flows from the Project Site to the MWRA 84-inch SMC. As a result, the design would help alleviate backups within the MWRA 84-inch SMC and decrease the amount of combined sewer overflows (CSOs) above the Amelia Earhart Dam.

Goals for the design of the proposed drainage system for the Project include the following:

- Reduce discharge to the MWRA 84-inch SMC.
- Incorporate LID techniques into the design to the maximum extent practicable.
- Design systems for long-term efficiency by providing concise operation and maintenance requirements.
- Upgrade existing drainage system components to ensure adequate capacity is provided for a 10-year storm event at a minimum.
- Improve the water quality of runoff for the proposed redevelopment areas.

These goals are fulfilled through many design components as described below.

The full-build drainage system follows the Stormwater Management Regulations and Best Management Practices as outlined in this report in order to provide long-term protection of natural resources in and around the Project.

Stormwater runoff from the Project will be collected in deep-sump catch basins with oil/debris traps and treated in off-line water quality units before discharging to the new 72-inch stormwater outfall. Regular sweeping programs for roads, parking and loading areas and a scheduled catch basin cleaning program are proposed for



pollutant source reduction. LID stormwater management techniques have been incorporated into the design as much as possible for stormwater quality and temperature control and are further described in this report.

Water Quantity and Quality Control

The proposed stormwater management system includes a number of proprietary structural and non-structural Best Management Practices (BMPs) to provide water quality mitigation for land uses with higher potential pollutant loads (LUHPPL) due to high intensity use. It should be noted that in the full build out condition the majority of the proposed parking spaces that attribute to the high intensity use of the Project will be in underground or structured garages rather than large surface parking lots. Any oil and grit in the runoff from the garages will be captured in structured separators prior to discharge to the sanitary sewer system rather than the stormwater closed pipe drainage system. Proposed surface parking facilities utilized during interim phases will discharge to the stormwater closed pipe drainage system and will be in compliance with the Massachusetts Stormwater Management Regulations. Additionally, upon completion of the MBTA Orange Line Station the number of vehicle trips to the Project Site will be significantly reduced further reducing the impacts of oil and grit. Stormwater runoff from the small percentage of proposed on-street parking, in addition to street sweeping and deep sump catch basins, will be treated by specific structural stormwater BMPs that are suitable for such an application. Although the 72-inch stormwater outfall will discharge into the tidal portion of the Mystic River which is currently a "Prohibited" shellfish growing area, the first inch of runoff has been designed to be treated consistent with the DEP requirement for treatment of one inch for critical areas. Water quality BMPs are designed to provide at least 80 percent total suspended solids (TSS) removal in accordance with the Massachusetts Stormwater Management Regulations. Source control, an operation and maintenance program, snow management, and spill prevention BMPs will be implemented within the Project. Other BMPs that may be used throughout the Project include water quality units, bioretention basins, biofiltration islands, green roofs, tree filter boxes, rainwater recovery, permeable asphalt and permeable pavers. Specific BMPs will be evaluated and reviewed for each future individual phase by the Somerville Conservation Commission (SCC).

4.2.1 Analysis of Stormwater Management Revisions

The proposed changes to the hydrology of the Site since the Amended Preliminary Master Plan revision dated June 2010 to the present application includes a reduction in impervious material cover type that will result in a reduction in stormwater runoff. The revisions to the Project areas are summarized in the following :

- The revisions to Block 6 include a larger roof area and a removal of the small rain garden. The rain garden was provided for water quality purposes only and did not provide detention volume. Water quality treatment will be provided with a suitable structure for parking deck rooftop.
- The revisions to both Block 7 and 8 include a reduction in block area to account for the additional area located in the median (Median Park) of Assembly Row. For the purposes of the closed pipe calculations this additional park area was analyzed as entirely impervious as a conservative assumption.
- The revisions to Parcel 11A consist of a large increase in landscaped area as compared to the previous designs and submissions.

The peak discharge from the project site has been reduced from the previously approved discharge rates. See following table of closed pipe calculations for the peak discharge rates using StormCAD and the high tide elevation for a tailwater condition.



Closed Pipe Calculations - Peak Discharge Rates (cubic feet per second)

	10-year	25-year	100-year
72" Stormwater Outfall			
Previous Design	108.9	156.7	221.2
Current Design	104.2	139.4	181.1

4.2.2 Proposed Stormwater Management System Improvements

The purpose of the Stormwater Management Plan (the Plan) is to provide long-term protection of natural resources in and around the Project Site. This is achieved by implementing water quality and quantity control measures designed to decrease the amount of pollutants discharged from the Project Site, increase the quality of stormwater recharged on the Project Site, and control discharge rates. A final stormwater management plan for each future individual phase will be locally reviewed and approved by the Somerville Conservation Commission.

Low Impact Development (LID) Features

Low impact development techniques combine functional site design with pollution prevention in order to reduce impacts to nearby water resources. LID can be very effective for new and ultra urban areas, where space is a limiting factor, by selecting LID practices that focus on decentralizing stormwater management at the Project Site and incorporating vegetated stormwater management techniques into the design as much as possible to reduce peak runoff rates and provide treatment to improve water quality. The practices that may be implemented include: green roofs, bioretention basins (rain gardens), biofiltration islands, tree box filters, porous pavements, and rainwater recovery. In addition to improving water quality, these LID practices will also reduce the temperature of the stormwater discharging at the proposed 72-inch outfall.

Mitigation Measures

The Project will include mitigation measures to safely protect surrounding resource areas from the discharge of runoff. The stormwater management system has been designed to meet or exceed the standards contained in the DEP Stormwater Management Regulations.

After being collected in the Project's closed pipe drainage system, the Project's stormwater runoff will be treated and then discharged via the proposed 72-inch stormwater outfall that was constructed by the Proponent for the City of Somerville. The outfall pipe was included in those activities and granted a waiver from further review under MEPA in the Final Record of Decision on this Project. The proposed 72-inch storm drain will be operational prior to the opening of the first building constructed as part of the mixed use development. In addition to the proposed 72-inch stormwater outfall, the Project Site will feature multiple LID measures and over two and half miles of brand new stormwater drainage infrastructure including the replacement of aged existing drainage systems where necessary.

Over 3 million gallons of combined sewer overflows from the MWRA 84-inch SMC entered the Mystic River during wet weather events in 2006. Stormwater runoff entering the MWRA 84-inch SMC from the Project Site will be redirected to the proposed 72-inch outfall and will therefore reduce the amount of combined sewer overflows to the Mystic River. The MWRA has performed an analysis of the benefits of removing the flows from the SMC. The analysis shows that removal of flows will reduce the average annual treated combined sewer overflow volume at Outfall MWR205A located near the Fellsway by Wellington Bridge from 2.35 million gallons to 1.70 million gallons, a 28% reduction in annual discharge volume. Outfall MWR205A



discharges treated combined sewer flows to the upstream portion of the Mystic River during high tide and extreme wet weather events. A reduction of discharges in this location will present a direct environmental benefit by improving the water quality of the Mystic River.

Long-Term Maintenance Program

The Proponent has entered into a long term maintenance agreement with the City of Somerville to provide for the Proponent's commitments to the City in order to maintain sidewalks within the Project and to maintain the non-standard stormwater quality structures. The City will be responsible for the maintenance of the streets, sewer, water and standard drainage structures (e.g. catch basins, manholes, pipes). The Proponent will maintain the streetscape and plaza landscaping within the Project as part of its responsibilities under the long-term maintenance agreement. A sample Long-Term BMP Maintenance/Evaluation Checklist is included in Appendix C.

Gas

Existing Conditions

5.1 Existing Gas Distribution System

NationalGrid, formerly the Keyspan Company, is the provider of the gas to the Project area. The closest gas source to the area is a low pressure 16-inch to 20-inch welded steel gas line located in an easement which runs across the MBTA tracks near Assembly Square Drive and North Union Street. Other gas lines within the Project area branch off of the 20-inch line.

Proposed Conditions

5.2 Proposed Gas System Requirements

In past communications between VHB and NationalGrid, NationalGrid has stated that the findings in the GIA report are not relevant today. VHB has provided information to NationalGrid regarding the building program and approximate loads in order for NationalGrid to estimate and identify the size, sources and costs for their gas system improvements. NationalGrid ran an analysis of the existing and proposed systems and determined that due to the size of the development that a higher pressure gas system than is currently available will be required to service the Project.

5.3 Proposed Gas System Improvements

The nearest source of the higher pressure gas to the Project is located in Pinckney Street in East Somerville. A 12-inch steel gas line was installed from Pinckney Street to the Project along Pearl Street, Mt. Vernon Street, Lombardi, and Assembly Square Drive. The gas line mains have been installed into the project area for connection to the future development blocks.

Electrical Distribution System

Existing Conditions

6.1 Existing Electrical Distribution System

NStar supplies electricity to the Assembly Square area with four 13.8 kV electrical services lines in the Assembly Square Revitalization Area. The four 13.8 kV service lines serve the following

- Assembly Square Marketplace
- Foley Street
- Office Building/Vacant Theater
- Back-up

Proposed Conditions

6.2 Proposed Electrical Distribution System Requirements

In past communications between VHB and NStar, Nstar has stated that the findings in the GIA report are not relevant today. VHB has provided information to NStar regarding the building program and approximate loads in order for NStar to estimate and identify the size, sources and costs for their electrical system improvements. VHB will design the conduit and manhole system in conjunction with NStar in order to accommodate the required electrical infrastructure.

6.3 Proposed Electrical Distribution System Improvements

The electrical infrastructure, including ductbanks and manholes, have been constructed by the Proponent in the ASRA for the future electrical system improvements.

Telephone Distribution System

Existing Conditions

Existing Telephone Distribution System

Verizon supplies telephone service to the Project area. The system consists of underground lines and overhead telephone wires between poles.

Proposed Conditions

7.2 Proposed Telephone Distribution System Requirements

In past communications between VHB and Verizon, Verizon stated the findings in the GIA report are not relevant today. VHB has provided information to Verizon regarding the building program and approximate loads in order for NStar to estimate and identify the size, sources and costs for their telephone system improvements. VHB will design the conduit and manhole system in conjunction with Verizon in order to accommodate the required telephone infrastructure.

7.3 Proposed Telephone Distribution System Improvements

The telephone infrastructure, including ductbanks and manholes, have been constructed by the Proponent in the ASRA for the future telecommunications system improvements.

Fire Alarm System

Existing Conditions

8.1 Existing Fire Alarm System

The City of Somerville's Electric Lines and Light Department has jurisdictions over the fire alarm systems within the City. The fire alarm system consists of manholes and fire boxes within the Project area.

Proposed Conditions

8.2 Proposed Fire Alarm system Requirements and Improvements

The City of Somerville has requested that a wireless radio frequency fire alarm system be used to serve the Project area. In order to provide sufficient coverage and equipment for the wireless system VHB has coordinated final locations of the fire boxes with the City's Fire Chief.

Cable TV

Existing Conditions

9. Cable TV

9.1 Existing Cable Television System

The only location that is serviced by Comcast/RCN cable within the Project area is along Middlesex Avenue near Foley Street and the Assembly Square Marketplace.

Proposed Conditions

9.2 Proposed Cable Television System Requirements and Improvements

VHB contacted the current suppliers of cable and telecommunications who service the Project area to determine the level of services offered and the magnitude of the improvements. Sufficient conduit and manholes have been provided to support future cable and telecommunications providers.



10

Summary

10. SUMMARY


The proposed buildings and utilities within the Project area will be constructed in multiple phases over the course of the project. All necessary infrastructure for the full build out of the Project has been constructed in the streets of the PUD area. The construction of the utility infrastructure began in 2009. Coordination with private utilities is ongoing and will continue throughout the construction of the Project. The water system adequately provides water during the average day demand and peak fire flow conditions. The sewer system is sized to carry all flows from the proposed development and adjacent properties to the Medford-Somerville branch sewer. The sewer flows generated will be mitigated at a 4:1 ratio. The stormwater management system has been sufficiently designed to meet all applicable local and state regulations. All future phases of the Project will be reviewed by the City of Somerville as part of the Special Permit with Site Plan Review (SPSR) process.

List of Figures

- Figure 1. Site Location Map
- Figure 2. Existing Water Demand
- Figure 3.1. Existing Sewer Generation
- Figure 3.2. Estimated Proposed Sewer Generation and Water Demand

Appendix A

Water System Analysis

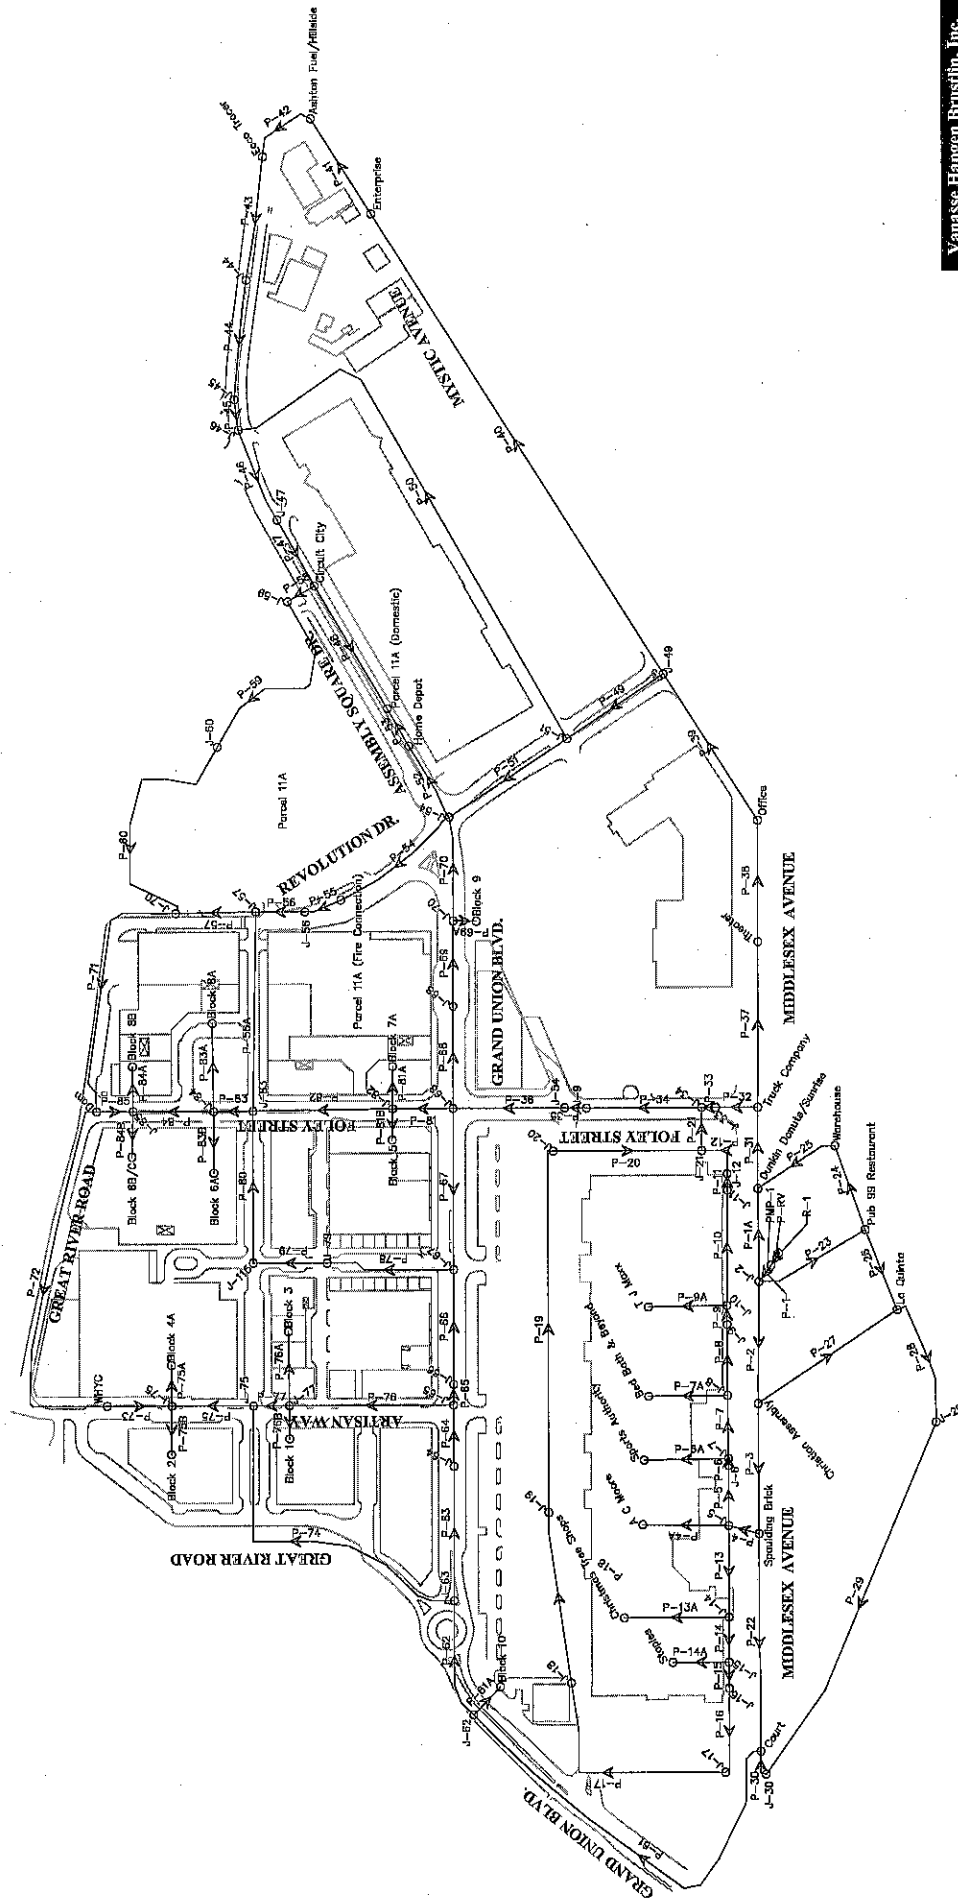


Vanasse Hangen Brustlin, Inc.
Water Model May 2, 2014
Water Plan Full Build Out
Assembly Square PUD
Assembly Square Drive
Somerville, Massachusetts




VHB**Flow Test Information Sheet**VHB project number: 11496.00VHB project name: BLOCK 1 & BLOCK 4Location of test: ASSEMBLY SQUARE DRIVE (NEW SECTION)
(Fire hydrant number if any)Date & time of test: Date: 8/18/2011 Time: 9:00 (am)(pm)Temperature: 80 (F)Test conducted by: RICHARD P. MATTHEWS JR. PE - VHBTest witnessed by: TIMOTHY HAYES - VHB SOMERVILLE WATER DEPTName of Water District: CITY OF SOMERVILLEName of Fire District: " " "Source of Water Supply: Gravity ☐ Pump ☐ Other MWRAIs water supply provided by: PRV STA's ☐ YES ☐ NO ☐

Area Map: (Draw Sketch showing property location: bounding streets and names, north arrow, hydrant location and identification numbers, distances from hydrants to property, elevations of hydrants and building floors & grade, all water mains and sizes interconnection valves, etc.)

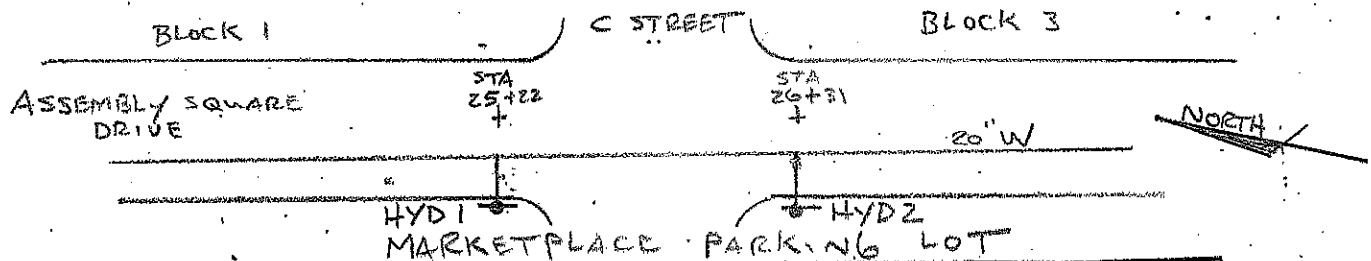

Flow Test Data:

Flow at Hydr. No.	Elevation at Hydr	Static at Hydr. No.	Static PSIG	Residual PSIG	Flow PSIG	Outlet size and coefficient	GPM
2	13.13	1	77	69	57	2.5" 0.9	1265

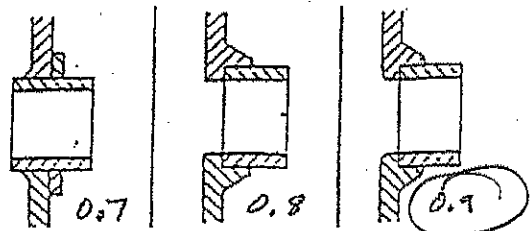Miscellaneous comments: HYDRANTS ARE MSH MODEL 929 5 1/4" W/ 2 1/2" HOSE CONNECTIONSSigned: [Signature]Witness: [Signature]



Flow Test Information Sheet

VHB project number: 08518.03

VHB project name: Assembly Square PUD

Location of test: Middlesex Ave @ Memory Ln / McGrath Highway / Kensington
(Fire hydrant number if any)

Date & time of test: Date: 9/13/06 Time: 10:20 (am) (pm)

Temperature: _____

Test conducted by: Lenny Dodge & Dennis Grieco

Test witnessed by: _____

Name of Water District: Somerville, MA

Name of Fire District: Somerville, MA

Source of Water Supply: Gravity ☐

Pump ☒

Other _____


Is water supply provided by: PRV STA's ☐

YES ☐

NO ☐

Area Map:

(Draw Sketch showing property location; bounding streets and names, north arrow, hydrant location and identification numbers, distances from hydrants to property, elevations of hydrants and building floors & grade, all water mains and sizes interconnection valves, etc.)



ASSEMBLY SQUARE MALL




Flow Test Data:

Flow at Hydr. No.	Elevation at Hydr.	Static at Hydr. No.	Static PSIG	Residual PSIG	Flow PSIG	Outlet size and coefficient		GPM Co. (@ 10')
1		2	72	69	52	2 1/2	0.9	5645

Miscellaneous comments: _____

Signed: _____

Witness: _____



Project: ASSEMBLY SQUARE Project # 08518-03

Location: SOMERVILLE, MA Sheet 1 of 1

Calculated by: DAG Date: 9/13/06

Checked by: MVH Date: 9/13/06

Title

HYDRANT FLOW TEST

RESIDUAL HYDRANT - #2

FLOWED HYDRANT - #1

2 1/2" ORIFICE

OUTLET SMOOTH AND ROUNDED - $C = 0.9$

STATIC PRESSURE #2 = 72 PSI

RESIDUAL PRESSURE #2 = 69 PSI

FLOWING PITOT PRESSURE #1 = 52 PSI
(VELOCITY HEAD)

THEORETICAL FLOW = 1344 GPM

ACTUAL FLOW = $0.9(1344)$
= 1210 GPM

⇒ CONVERSION TO BASE OF 20 PSI

$$Q_R = Q_F \times \frac{h_r^{.54}}{h_f^{.54}}$$

$$Q_R = 1210 \times \frac{(72-20)^{.54}}{(72-59)^{.54}} \quad \begin{matrix} (8.46) \\ (1.81) \end{matrix}$$

 $Q_R = 5645 \text{ GPM @ 20 PSI}$



Flow Test Information Sheet

VHB project number: 08518.03

VHB project name: ASSEMBLY SQUARE - IKEA

Location of test: SOMERVILLE, MA @ ASSEMBLY SQUARE DRIVE
(Fire hydrant number if any)

Date & time of test: Date: 3/14/07 Time: 11:45 (am) (pm)

Temperature: 71° (F)

Test conducted by: DENNIS GRIFFICI & MICHAEL GOODMAN

Test witnessed by: _____

Name of Water District: _____

Name of Fire District: _____

Source of Water Supply: Gravity ☐

Pump ☐

Other _____


Is water supply provided by: PRV STA's ☐

YES ☐

NO ☐

Area Map:

(Draw Sketch showing property location; bounding streets and names, north arrow, hydrant location and identification numbers, distances from hydrants to property, elevations of hydrants and building floors & grade, all water mains and sizes interconnection valves, etc.)

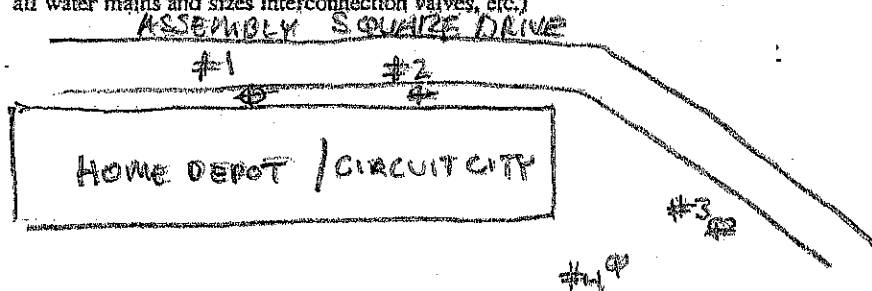




Flow Test Data:

Flow at Hydr. No.	Elevation at Hydr.	Static at Hydr. No.	Static PSIG	Residual PSIG	Flow PSIG	Outlet size and coefficient	GPM @ (20')
1		2	73	68	58	2 1/2" 0.9	4573
3		4	66	61	48	2 1/2" 0.9	3855

Miscellaneous comments: _____

Signed: Mark De

Witness: Ken



Project: ASSEMBLY SQ / IKEA

Project # 08518 02

Location: CONOVERVILLE, VA

Sheet 1 of

Calculated by: DAG

Date: 3/14/02

Checked by: MUG

Date: 3/16/07

Title

HYDRANT FLOW TEST #1

RESIDUAL HYDRANT - # 2

FLOWED HYDRANT - # 1

2 1/2" ORIFICE

OUTLET SMOOTH & ROUNDED C = 0.90

STATIC PRESSURE @ #2 = 73 PSI

RESIDUAL PRESSURE @ #2 = 68 PSI

FLOWING PITOT PRESSURE @ #1 = 58

THEORETICAL FLOW : $Q = 29.83 C d^2 \sqrt{P}$

$$Q = 29.83 (.9) (2.5^4) (\sqrt{58}) = 1277.9 \text{ GPM}$$

⇒ CONVERSION TO BASE OF 20 PSI

$$Q_R = Q_F \times \frac{H_R^{.54}}{H_F^{.54}}$$

$$Q_R = 1278 \times \frac{(73-20)^{.54}}{(73-68)^{.54}} = \underline{\underline{4573 \text{ GPM @ 20 PSI}}}$$



Computations

Project:

Location:

Calculated by: DAG

Checked by:

Title

Project # 08518.03

Sheet 2 of 2

Date: 3/14/07

Date:

HYDRANT FLOW TEST #2

RESIDUAL HYDRANT - #3

FLOWED HYDRANT - #4

2 1/2" ORIFICE

OUTLET SMOOTH & ROUNDED $C = 0.90$

STATIC PRESSURE @ #3 = 66 PSI

RESIDUAL PRESSURE @ #3 = 61 PSI

FLOWING PRESSURE @ #4 = 48 PSI

THEORETICAL FLOW: $Q = 29.83 C d^2 \sqrt{P}$

$$Q = 29.83 (.9) (2.5^2) \sqrt{48} = 1162.5 \text{ GPM}$$

⇒ CONVERSIONS TO BASE OF 20 PSI

$$Q_R = Q_F \times \frac{H_R^{.54}}{H_F^{.54}}$$

$$Q_R = 1163 \times \frac{(66-20)^{.54}}{(66-61)^{.54}} = \underline{\underline{3855 \text{ GPM @ 20 PSI}}}$$

Scenario: 3,500 ISO
Current Time Step: 0.000 Hr
Fire Flow Node FlexTable: Fire Flow Report

Label	Zone	Fire Flow Iterations	Satisfies Fire Flow Constraints?	Fire Flow (Needed) (gpm)	Fire Flow (Available) (gpm)	Flow (Total Needed) (gpm)	Flow (Total Available) (gpm)	Pressure (Residual Lower Limit) (psi)
A C Moore	Zone	11	False	3,500.00	2,247.37	3,503.00	2,250.37	20.0
Ashton Fuel/Hillside	Zone	4	False	3,500.00	3,190.13	3,502.00	3,192.13	20.0
Bed Bath & Beyond	Zone	9	False	3,500.00	2,923.59	3,503.00	2,926.59	20.0
Block 1	Zone	4	True	3,500.00	4,166.05	3,583.00	4,249.05	20.0
Block 2	Zone	4	True	3,500.00	4,119.76	3,540.00	4,159.76	20.0
Block 3	Zone	4	True	3,500.00	4,054.81	3,660.00	4,214.81	20.0
Block 4A	Zone	4	True	3,500.00	4,136.68	3,570.00	4,206.68	20.0
Block 5	Zone	4	True	3,500.00	4,157.55	3,604.00	4,261.55	20.0
Block 6A	Zone	4	True	3,500.00	4,082.57	3,524.00	4,106.57	20.0
Block 6B/C	Zone	4	True	3,500.00	4,116.45	3,601.00	4,217.45	20.0
Block 7A	Zone	4	True	3,500.00	4,111.53	3,636.00	4,247.53	20.0
Block 8A	Zone	4	True	3,500.00	4,017.12	3,543.00	4,060.12	20.0
Block 8B	Zone	4	True	3,500.00	4,121.07	3,581.00	4,202.07	20.0
Block 9	Zone	4	True	3,500.00	4,131.42	3,545.00	4,176.42	20.0
Block 10	Zone	3	True	3,500.00	3,608.71	3,511.00	3,619.71	20.0
Christian Assembly	Zone	4	True	3,500.00	4,337.15	3,501.00	4,338.15	20.0
Christmas Tree Shops	Zone	10	False	3,500.00	2,387.65	3,504.00	2,391.65	20.0
Circuit City	Zone	4	True	3,500.00	4,224.06	3,502.00	4,226.06	20.0
Court	Zone	4	True	3,500.00	4,250.56	3,503.00	4,253.56	20.0
Dam	Zone	4	True	3,500.00	4,288.47	3,501.00	4,289.47	20.0
Dunkin Donuts/Sunrise	Zone	4	True	3,500.00	4,359.93	3,503.00	4,362.93	20.0
Ecco Tracer	Zone	3	False	3,500.00	3,370.73	3,503.00	3,373.73	20.0
Enterprise	Zone	4	False	3,500.00	3,153.23	3,501.00	3,154.23	20.0
H-2	<None>	4	True	3,500.00	3,698.38	3,500.00	3,698.38	20.0
H-3	<None>	4	True	3,500.00	4,148.00	3,500.00	4,148.00	20.0
Home Depot	Zone	4	True	3,500.00	4,201.57	3,509.00	4,210.57	20.0
J-2	Zone	5	True	3,500.00	4,397.65	3,500.00	4,397.65	20.0
J-5	Zone	4	True	3,500.00	4,183.30	3,500.00	4,183.30	20.0
J-6	Zone	3	False	3,500.00	3,480.22	3,500.00	3,480.22	20.0
J-7	Zone	3	False	3,500.00	3,415.77	3,500.00	3,415.77	20.0
J-8	Zone	4	False	3,500.00	3,253.81	3,500.00	3,253.81	20.0
J-9	Zone	4	False	3,500.00	3,161.09	3,500.00	3,161.09	20.0
J-9	Zone	5	True	3,500.00	4,363.44	3,500.00	4,363.44	20.0
J-10	Zone	4	False	3,500.00	3,160.21	3,500.00	3,160.21	20.0
J-11	Zone	3	False	3,500.00	3,323.55	3,500.00	3,323.55	20.0
J-12	Zone	3	False	3,500.00	3,417.63	3,500.00	3,417.63	20.0
J-14	Zone	4	False	3,500.00	3,179.46	3,500.00	3,179.46	20.0
J-15	Zone	9	False	3,500.00	2,932.48	3,500.00	2,932.48	20.0
J-16	Zone	10	False	3,500.00	2,829.30	3,500.00	2,829.30	20.0
J-17	Zone	10	False	3,500.00	2,620.32	3,500.00	2,620.32	20.0
J-18	Zone	11	False	3,500.00	2,459.28	3,500.00	2,459.28	20.0
J-19	Zone	10	False	3,500.00	2,471.68	3,500.00	2,471.68	20.0
J-20	Zone	9	False	3,500.00	2,938.55	3,500.00	2,938.55	20.0
J-21	Zone	4	True	3,500.00	3,828.23	3,500.00	3,828.23	20.0
J-29	Zone	4	False	3,500.00	2,986.81	3,500.00	2,986.81	20.0
J-30	Zone	4	True	3,500.00	4,239.23	3,500.00	4,239.23	20.0
J-33	Zone	5	True	3,500.00	4,411.58	3,500.00	4,411.58	20.0
J-34	Zone	5	True	3,500.00	4,403.80	3,500.00	4,403.80	20.0
J-44	Zone	4	True	3,500.00	3,739.90	3,500.00	3,739.90	20.0
J-45	Zone	4	True	3,500.00	3,992.06	3,500.00	3,992.06	20.0
J-46	Zone	4	True	3,500.00	4,044.44	3,500.00	4,044.44	20.0
J-47	Zone	4	True	3,500.00	4,109.79	3,500.00	4,109.79	20.0
J-49	Zone	4	True	3,500.00	4,088.97	3,500.00	4,088.97	20.0
J-51	Zone	4	True	3,500.00	4,175.76	3,500.00	4,175.76	20.0
J-54	Zone	5	True	3,500.00	4,366.35	3,500.00	4,366.35	20.0
J-54	Zone	4	True	3,500.00	4,291.90	3,500.00	4,291.90	20.0
J-56	Zone	4	True	3,500.00	4,242.00	3,500.00	4,242.00	20.0
J-57	Zone	4	True	3,500.00	4,260.68	3,500.00	4,260.68	20.0
J-59	Zone	4	True	3,500.00	4,155.64	3,500.00	4,155.64	20.0
J-60	Zone	4	True	3,500.00	4,096.89	3,500.00	4,096.89	20.0
J-62	Zone	4	True	3,500.00	4,282.19	3,500.00	4,282.19	20.0
J-63	Zone	4	True	3,500.00	4,268.72	3,500.00	4,268.72	20.0

J-64	Zone	4	True	3,500.00	4,332.45	3,500.00	4,332.45	20.0
J-65	Zone	4	True	3,500.00	4,313.64	3,500.00	4,313.64	20.0
J-66	Zone	4	True	3,500.00	4,299.40	3,500.00	4,299.40	20.0
J-67	Zone	4	True	3,500.00	4,290.76	3,500.00	4,290.76	20.0
J-68	Zone	4	True	3,500.00	4,297.96	3,500.00	4,297.96	20.0
J-68	Zone	4	True	3,500.00	4,233.26	3,500.00	4,233.26	20.0
J-70	Zone	4	True	3,500.00	4,293.58	3,500.00	4,293.58	20.0
J-70	Zone	4	True	3,500.00	4,260.99	3,500.00	4,260.99	20.0
J-75	Zone	4	True	3,500.00	4,292.65	3,500.00	4,292.65	20.0
J-75	Zone	4	True	3,500.00	4,319.20	3,500.00	4,319.20	20.0
J-77	Zone	4	True	3,500.00	4,319.67	3,500.00	4,319.67	20.0
J-79	Zone	3	True	3,500.00	3,588.90	3,500.00	3,588.90	20.0
J-82	Zone	4	True	3,500.00	4,290.11	3,500.00	4,290.11	20.0
J-83	Zone	4	True	3,500.00	4,287.28	3,500.00	4,287.28	20.0
J-84	Zone	4	True	3,500.00	4,285.59	3,500.00	4,285.59	20.0
J-85	Zone	4	True	3,500.00	4,285.99	3,500.00	4,285.99	20.0
J-115	Zone	3	True	3,500.00	3,561.61	3,500.00	3,561.61	20.0
J-159	<None>	5	True	3,500.00	4,687.00	3,500.00	4,687.00	20.0
J-160	<None>	5	True	3,500.00	4,489.73	3,500.00	4,489.73	20.0
J-161	<None>	4	True	3,500.00	4,185.66	3,500.00	4,185.66	20.0
J-162	<None>	4	True	3,500.00	3,970.62	3,500.00	3,970.62	20.0
La Quinta	Zone	3	True	3,500.00	3,647.98	3,523.00	3,670.98	20.0
Office	Zone	4	True	3,500.00	4,128.02	3,510.00	4,138.02	20.0
Parcel 11A (Domestic)	Zone	4	True	3,500.00	4,168.72	3,620.00	4,288.72	20.0
Parcel 11A (Fire Connection)	Zone	4	True	3,500.00	4,257.46	3,500.00	4,257.46	20.0
Pub 99 Restaurant	Zone	4	True	3,500.00	4,281.75	3,517.00	4,298.75	20.0
Spaulding Brick	Zone	4	True	3,500.00	4,300.10	3,501.00	4,301.10	20.0
Sports Authority	Zone	4	False	3,500.00	3,043.81	3,503.00	3,046.80	20.0
Staples	Zone	10	False	3,500.00	2,575.26	3,503.00	2,578.26	20.0
T J Maxx	Zone	4	False	3,500.00	2,984.14	3,504.00	2,988.14	20.0
Theater	Zone	4	True	3,500.00	4,308.47	3,515.00	4,323.48	20.0
Truck Company	Zone	5	True	3,500.00	4,378.08	3,502.00	4,380.08	20.0
Warehouse	Zone	4	True	3,500.00	4,281.17	3,501.00	4,282.17	20.0
WHYC	Zone	4	True	3,500.00	4,285.77	3,501.00	4,286.77	20.0

\\Vhb\proj\Wat-LD\08518.05\tech\WaterCad\0851805 Water AmPUD MAY-2014.wtg

Scenario: 3,500 ISO
Current Time Step: 0.000 Hr
Pipe FlexTable:

Label	Length (Scaled) (ft)	Start Node	Stop Node	Diameter (in)	Material	Hazen- Williams C	Minor Loss Coefficient (Local)
P-63	308.53	J-63	J-64	20.0	Ductile Iron	130.0	0.390
P-66	263.28	J-66	J-67	20.0	Ductile Iron	130.0	0.390
P-32	96.71	J-33	Truck Company	20.0	Ductile Iron	130.0	1.280
P-22	498.70	Spaulding Brick	Court	20.0	Ductile Iron	80.0	0.390
P-64	140.75	J-64	J-65	20.0	Ductile Iron	130.0	0.390
P-65	47.49	J-65	J-66	20.0	Ductile Iron	130.0	0.390
P-36	257.64	J-68	J-54	20.0	Ductile Iron	130.0	0.390
P-35	50.22	J-54	J-9	20.0	Ductile Iron	130.0	0.390
P-49	267.82	J-49	J-51	12.0	Ductile Iron	110.0	1.280
P-31	187.12	Truck Company	Dunkin Donuts/Sunrise	20.0	Ductile Iron	80.0	0.390
P-3	299.22	Christian Assembly	Spaulding Brick	20.0	Ductile Iron	80.0	0.390
P-24	205.30	Pub 99 Restaurant	Warehouse	16.0	Ductile Iron	100.0	0.390
P-25	207.72	Warehouse	Dunkin Donuts/Sunrise	12.0	Ductile Iron	80.0	0.390
P-23	278.25	J-2	Pub 99 Restaurant	16.0	Ductile Iron	80.0	0.390
P-68	235.11	J-68	J-68	20.0	Ductile Iron	130.0	1.280
P-69	196.43	J-68	J-70	20.0	Ductile Iron	130.0	0.390
P-70	238.60	J-70	J-54	20.0	Ductile Iron	130.0	1.280
P-46	226.19	J-47	J-46	12.0	Ductile Iron	130.0	0.390
P-45	70.90	J-46	J-45	12.0	Ductile Iron	130.0	0.390
P-44	275.57	J-45	J-44	12.0	Ductile Iron	110.0	0.390
P-43	286.46	J-44	Ecco Tracer	12.0	Ductile Iron	110.0	0.390
P-42	167.96	Ecco Tracer	Ashton Fuel/Hillside	12.0	Ductile Iron	110.0	0.390
P-12	113.26	J-12	J-21	8.0	Ductile Iron	100.0	0.800
P-20	343.17	J-21	J-20	8.0	Ductile Iron	110.0	0.390
P-19	842.47	J-20	J-19	8.0	Ductile Iron	110.0	0.390
P-18	395.68	J-19	J-18	8.0	Ductile Iron	110.0	0.390
P-17	544.73	J-18	J-17	8.0	Ductile Iron	110.0	0.390
P-16	196.86	J-17	J-16	8.0	Ductile Iron	100.0	0.390
P-5	138.06	J-5	J-6	8.0	Ductile Iron	100.0	0.390
P-30	62.05	Court	J-30	20.0	Ductile Iron	80.0	1.280
P-27	387.48	Christian Assembly	La Quinta	8.0	Ductile Iron	80.0	0.390
P-26	198.54	La Quinta	Pub 99 Restaurant	8.0	Ductile Iron	100.0	0.390
P-29	903.03	J-30	J-29	8.0	Ductile Iron	90.0	1.280
P-28	299.41	J-29	La Quinta	8.0	Ductile Iron	100.0	0.390
P-34	266.62	J-9	J-34	20.0	Ductile Iron	130.0	0.390
P-33	32.58	J-34	J-33	20.0	Ductile Iron	130.0	0.390
P-21	99.15	J-21	J-34	8.0	Ductile Iron	110.0	0.390
P-39	400.51	Office	J-49	12.0	Ductile Iron	100.0	0.800
P-41	259.85	Ashton Fuel/Hillside	Enterprise	12.0	Ductile Iron	90.0	0.800
P-40	1,255.92	Enterprise	J-49	12.0	Ductile Iron	90.0	0.800
P-15	59.46	J-16	J-15	8.0	Ductile Iron	100.0	0.390
P-14A	129.72	J-15	Staples	6.0	Ductile Iron	120.0	0.390
P-14	103.47	J-15	J-14	8.0	Ductile Iron	100.0	0.390
P-13A	241.80	J-14	Christmas Tree Shops	6.0	Ductile Iron	120.0	1.280
P-6	15.75	J-6	J-7	8.0	Ductile Iron	100.0	0.390
P-6A	194.43	J-7	Sports Authority	8.0	Ductile Iron	120.0	0.390
P-13	210.30	J-14	J-5	8.0	Ductile Iron	100.0	0.390
P-4A	198.17	J-5	A C Moore	6.0	Ductile Iron	120.0	0.390
P-7	144.89	J-7	J-8	8.0	Ductile Iron	100.0	0.390
P-8	162.77	J-8	J-9	8.0	Ductile Iron	100.0	0.390
P-9	43.65	J-9	J-10	8.0	Ductile Iron	100.0	0.390
P-10	265.23	J-10	J-11	8.0	Ductile Iron	100.0	0.390
P-11	37.85	J-11	J-12	8.0	Ductile Iron	100.0	0.390
P-9A	180.47	J-10	T J Maxx	8.0	Ductile Iron	120.0	0.390
P-7A	181.77	J-8	Bed Bath & Beyond	8.0	Ductile Iron	120.0	0.390
P-4	72.49	J-5	Spaulding Brick	12.0	Ductile Iron	100.0	0.390
P-RV	26.87	R-1	PMP-1	30.0	Ductile Iron	130.0	0.000
P-1	49.52	PMP-1	J-65	30.0	Ductile Iron	130.0	0.000
P-57	179.00	J-70	J-57	20.0	Ductile Iron	130.0	0.390
P-56	114.20	J-57	J-56	20.0	Ductile Iron	130.0	0.390
P-47	172.73	Circuit City	J-47	12.0	Ductile Iron	130.0	0.390
P-51	326.19	J-51	J-54	12.0	Ductile Iron	110.0	0.390
P-52	188.85	J-54	Home Depot	12.0	Ductile Iron	130.0	0.390
P-50	1,286.01	J-46	J-51	10.0	Ductile Iron	110.0	0.390

P-67	370.36	J-67	J-68	20.0	Ductile Iron	130.0	0.390
P-77	83.16	J-75	J-77	20.0	Ductile Iron	130.0	0.390
P-76	380.49	J-77	J-65	20.0	Ductile Iron	130.0	0.390
P-75	188.99	J-75	J-75	20.0	Ductile Iron	130.0	0.390
P-73	149.94	J-75	WHYC	20.0	Ductile Iron	130.0	0.390
P-81	140.24	J-68	J-82	20.0	Ductile Iron	130.0	0.390
P-78	299.65	J-67	J-79	8.0	Ductile Iron	130.0	0.390
P-79	171.30	J-79	J-115	8.0	Ductile Iron	130.0	0.390
P-85	84.37	Dam	J-85	20.0	Ductile Iron	130.0	0.390
P-84	186.51	J-85	J-84	20.0	Ductile Iron	130.0	0.390
P-76B	76.22	Block 1	J-77	12.0	Ductile Iron	130.0	0.390
P-75B	111.32	Block 2	J-75	12.0	Ductile Iron	130.0	0.390
P-81B	72.10	J-82	Block 5	12.0	Ductile Iron	130.0	0.390
P-84B	104.77	Block 6B/C	J-85	12.0	Ductile Iron	130.0	0.390
P-83A	203.07	Block 8A	J-84	12.0	Ductile Iron	130.0	0.390
P-84A	102.44	Block 8B	J-85	12.0	Ductile Iron	130.0	0.390
P-69A	53.57	Block 9	J-70	12.0	Ductile Iron	130.0	0.390
P-55	241.85	J-56	Parcel 11A (Fire Connection)	20.0	Ductile Iron	130.0	0.390
P-54	162.57	Parcel 11A (Fire Connection)	J-54	20.0	Ductile Iron	130.0	0.390
P-37	380.14	Truck Company	Theater	20.0	Ductile Iron	80.0	0.800
P-38	279.28	Theater	Office	12.0	Ductile Iron	100.0	0.800
P-60	675.92	J-60	J-70	12.0	Ductile Iron	130.0	0.390
P-58	83.19	Circuit City	J-59	12.0	Ductile Iron	130.0	0.390
P-59	398.81	J-59	J-60	12.0	Ductile Iron	130.0	0.390
P-53	99.53	Home Depot	Parcel 11A (Domestic)	12.0	Ductile Iron	130.0	0.390
P-48	330.28	Parcel 11A (Domestic)	Circuit City	12.0	Ductile Iron	130.0	0.390
P-76A	169.97	J-77	Block 3	12.0	Ductile Iron	130.0	0.390
P-75A	93.56	J-75	Block 4A	12.0	Ductile Iron	130.0	0.390
P-83B	141.24	Block 6A	J-84	12.0	Ductile Iron	130.0	0.390
P-61	1,024.72	Court	J-62	20.0	Ductile Iron	130.0	0.800
P-62	277.24	J-62	J-63	20.0	Ductile Iron	130.0	0.800
P-61A	89.16	J-62	Block 10	8.0	Ductile Iron	130.0	0.390
P-71	612.22	Dam	J-70	20.0	Ductile Iron	130.0	0.390
P-82	323.16	J-83	J-82	20.0	Ductile Iron	130.0	0.390
P-83	91.32	J-84	J-83	20.0	Ductile Iron	130.0	0.390
P-2	280.48	Christian Assembly	J-2	20.0	Ductile Iron	80.0	0.390
P-1A	213.28	J-2	Dunkin Donuts/Sunrise	20.0	Ductile Iron	80.0	0.390
P-74	819.64	J-63	J-75	8.0	Ductile Iron	130.0	0.390
P-81A	97.06	Block 7A	J-82	12.0	Ductile Iron	130.0	0.390
P-80	349.19	J-115	J-83	8.0	Ductile Iron	130.0	0.390
P-56A	458.24	J-57	J-83	12.0	Ductile Iron	130.0	0.390
P-242	517.45	WHYC	J-159	20.0	Ductile Iron	130.0	0.390
P-243	374.38	J-159	Dam	20.0	Ductile Iron	130.0	0.390
P-244	151.05	J-159	J-160	12.0	Ductile Iron	130.0	0.000
P-245	281.80	J-160	J-161	12.0	Ductile Iron	130.0	0.000
P-247	11.17	J-160	H-3	6.0	Ductile Iron	130.0	0.000
P-248	34.32	J-161	J-162	8.0	Ductile Iron	130.0	0.000
P-249	12.61	J-162	H-2	6.0	Ductile Iron	130.0	0.000

\\Vhb\proj\Wat-LD\08518.05\tech\WaterCad\0851805 Water AmPUD MAY-2014.wtg

Scenario: 3,500 ISO
Current Time Step: 0.000 Hr
Junction FlexTable:

Label	Elevation (ft)	Demand (gpm)	Hydraulic Grade (ft)	Pressure (psi)
Court	12.60	3.00	168.88	67.6
J-63	13.40	0.00	168.89	67.3
J-64	12.00	0.00	168.90	67.9
J-66	13.20	0.00	168.90	67.4
J-67	13.00	0.00	168.88	67.4
J-68	12.50	0.00	168.87	67.7
J-9	10.00	0.00	168.87	68.7
J-33	8.20	0.00	168.87	69.5
Truck Company.	9.10	2.00	168.87	69.1
Spaulding Brick	10.70	1.00	168.87	68.4
J-65	13.00	0.00	168.90	67.5
J-70	12.00	0.00	168.86	67.9
J-56	13.50	0.00	168.86	67.2
J-54	10.00	0.00	168.87	68.7
J-49	12.00	0.00	168.86	67.9
J-51	10.70	0.00	168.86	68.4
Dunkin Donuts/Sunrise	9.20	3.00	168.87	69.1
Christian Assembly	9.50	1.00	168.87	69.0
Pub 99 Restaurant	9.20	17.00	168.87	69.1
Warehouse	8.40	1.00	168.87	69.4
J-2	7.80	0.00	168.87	69.7
J-68	14.00	0.00	168.86	67.0
J-70	13.00	0.00	168.86	67.4
J-54	12.00	0.00	168.86	67.9
Home Depot	11.00	9.00	168.86	68.3
J-47	10.50	0.00	168.86	68.5
J-46	11.00	0.00	168.86	68.3
J-45	11.30	0.00	168.86	68.2
J-44	15.50	0.00	168.86	66.4
Ecco Tracer	26.00	3.00	168.86	61.8
Ashton Fuel/Hillside	31.50	2.00	168.86	59.4
J-12	9.00	0.00	168.87	69.2
J-21	9.50	0.00	168.87	69.0
J-20	9.10	0.00	168.87	69.1
J-19	10.80	0.00	168.87	68.4
J-18	11.50	0.00	168.87	68.1
J-17	12.00	0.00	168.87	67.9
J-16	10.70	0.00	168.87	68.4
J-5	10.70	0.00	168.87	68.4
J-6	10.10	0.00	168.87	68.7
J-10	8.00	0.00	168.87	69.6
J-30	12.20	0.00	168.88	67.8
La Quinta	10.50	23.00	168.87	68.5
J-29	11.50	0.00	168.87	68.1
J-34	8.50	0.00	168.87	69.4
Office	9.80	10.00	168.86	68.8
Enterprise	31.50	1.00	168.86	59.4
J-15	10.10	0.00	168.87	68.7
Staples	11.40	3.00	168.87	68.1
J-14	8.40	0.00	168.87	69.4
Christmas Tree Shops	11.40	4.00	168.87	68.1
J-7	10.30	0.00	168.87	68.6
Sports Authority	10.80	3.00	168.87	68.4
A C Moore	11.40	3.00	168.87	68.1
J-8	7.50	0.00	168.87	69.8

J-9	8.00	0.00	168.87	69.6
J-11	9.50	0.00	168.87	69.0
T J Maxx	10.60	4.00	168.87	68.5
Bed Bath & Beyond	11.10	3.00	168.87	68.3
J-57	13.00	0.00	168.86	67.4
Circuit City	9.00	2.00	168.86	69.2
J-83	12.50	0.00	168.86	67.7
J-115	12.20	0.00	168.87	67.8
J-75	11.90	0.00	168.87	67.9
WHYC	12.60	1.00	168.87	67.6
Dam	12.50	1.00	168.86	67.7
J-77	12.00	0.00	168.88	67.9
J-75	12.50	0.00	168.87	67.7
J-82	12.50	0.00	168.86	67.7
J-79	12.00	0.00	168.88	67.9
J-84	12.50	0.00	168.86	67.7
J-85	12.50	0.00	168.86	67.7
Block 1	13.00	83.00	168.87	67.4
Block 2	13.00	40.00	168.87	67.4
Block 3	13.00	160.00	168.86	67.4
Block 4A	13.00	70.00	168.87	67.4
Block 5	13.00	104.00	168.86	67.4
Block 6A	13.00	24.00	168.86	67.4
Block 6B/C	13.00	101.00	168.86	67.4
Block 7A	13.50	136.00	168.86	67.2
Block 8A	13.00	43.00	168.86	67.4
Block 8B	13.00	81.00	168.86	67.4
Block 9	14.20	45.00	168.86	66.9
Parcel 11A (Fire Connection)	13.00	0.00	168.86	67.4
Theater	9.31	15.00	168.87	69.0
J-60	11.00	0.00	168.86	68.3
J-59	10.30	0.00	168.86	68.6
Parcel 11A (Domestic)	11.00	120.00	168.86	68.3
J-62	12.50	0.00	168.89	67.7
Block 10	12.00	11.00	168.89	67.9
J-159	0.00	0.00	168.87	73.1
J-160	0.00	0.00	168.87	73.1
J-161	0.00	0.00	168.87	73.1
J-162	0.00	0.00	168.87	73.1

\\Vhblproj\Wat-LD\08518.05\tech\WaterCad\0851805 Water ArnPUD MAY-2014.wtg

Appendix B


MWRA Meter 91 Readings

Somerville - Total Daily Flow

8/8/2006

Low Service

Month	2004 Flow (MGD)	2005 Flow (MGD)	2006 Flow (MGD)
Jan	4.280	3.796	3.727
Feb	4.321	3.897	3.739
Mar	3.879	3.878	3.789
Apr	3.750	3.895	3.814
May	3.877	3.889	3.880
Jun	4.196	4.187	3.564
Jul	4.240	4.181	2.864
Aug	4.234	4.093	
Sep	3.852	4.034	
Oct	3.826	3.813	
Nov	3.642	3.736	
Dec	3.632	3.787	
Average	3.978	3.929	

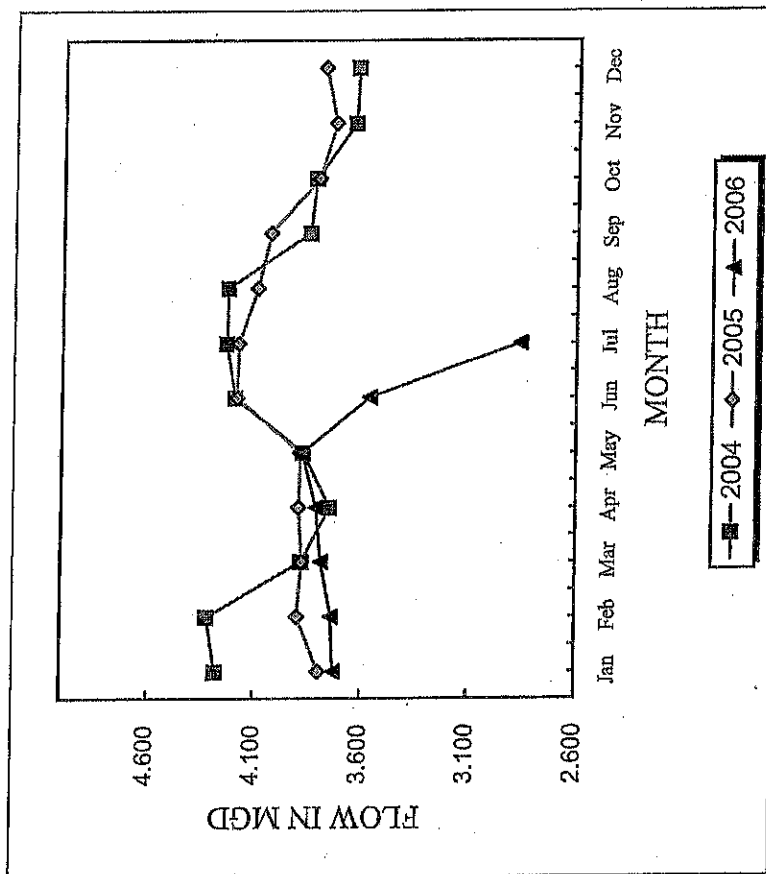

Meter 91 Flows:

MWRA Meter 91 daily Flows

Time	CH 1 High Flow	CH 2 Pressure (HGL)
12/9/2003 0:00	1.053	
12/10/2003 0:00	1.042	
12/11/2003 0:00	1.081	
12/12/2003 0:00	1.079	
12/13/2003 0:00	1.103	
12/14/2003 0:00	1.121	
12/15/2003 0:00	1.212	
12/16/2003 0:00	1.046	
12/17/2003 0:00	1.019	
12/18/2003 0:00	1.026	
12/19/2003 0:00	0.998	
12/20/2003 0:00	0.96	
12/21/2003 0:00	0.95	
12/22/2003 0:00	1.021	
12/23/2003 0:00	0.912	
12/24/2003 0:00	0.874	
12/25/2003 0:00	0.822	
12/26/2003 0:00	0.953	
12/27/2003 0:00	0.976	
12/28/2003 0:00	0.976	
12/29/2003 0:00	1.046	
12/30/2003 0:00	1.077	
12/31/2003 0:00	1.071	
1/1/2004 0:00	0.959	
1/2/2004 0:00	0.943	
1/3/2004 0:00	0.928	
1/4/2004 0:00	0.949	
1/5/2004 0:00	0.941	
1/6/2004 0:00	1.027	
1/7/2004 0:00	1.094	186.27
1/8/2004 0:00	1.132	186.61
1/9/2004 0:00	1.127	187.009
1/10/2004 0:00	1.159	186.525
1/11/2004 0:00	1.199	187.002
1/12/2004 0:00	1.238	187.934
1/13/2004 0:00	1.103	184.955
1/14/2004 0:00	1.079	183.661
1/15/2004 0:00	1.093	184.041
1/16/2004 0:00	1.128	183.913
1/17/2004 0:00	1.163	183.674
1/18/2004 0:00	1.083	183.203
1/19/2004 0:00	1.131	183.886
1/20/2004 0:00	1.11	184.27
1/21/2004 0:00	1.094	184.339
1/22/2004 0:00	1.08	183.91
1/23/2004 0:00	1.096	184.261
1/24/2004 0:00	1.134	183.889
1/25/2004 0:00	1.127	183.916
1/26/2004 0:00	1.162	184.783

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
1/27/2004 0:00	1.188	184.651
1/28/2004 0:00	1.176	184.672
1/29/2004 0:00	1.29	184.858
1/30/2004 0:00	1.147	184.736
1/31/2004 0:00	1.169	184.103
2/1/2004 0:00	1.172	184.044
2/2/2004 0:00	1.156	184.602
2/3/2004 0:00	1.15	184.545
2/4/2004 0:00	1.188	184.682
2/5/2004 0:00	1.168	184.376
2/6/2004 0:00	1.105	184.078
2/7/2004 0:00	1.127	183.566
2/8/2004 0:00	1.119	183.341
2/9/2004 0:00	1.111	183.88
2/10/2004 0:00	1.12	183.813
2/11/2004 0:00	1.096	183.707
2/12/2004 0:00	1.147	184.23
2/13/2004 0:00	1.151	184.278
2/14/2004 0:00	1.179	183.346
2/15/2004 0:00	1.152	183.133
2/16/2004 0:00	1.179	183.671
2/17/2004 0:00	1.224	184.984
2/18/2004 0:00	1.293	185.555
2/19/2004 0:00	1.26	184.254
2/20/2004 0:00	1.135	183.789
2/21/2004 0:00	1.104	182.821
2/22/2004 0:00	1.126	182.732
2/23/2004 0:00	1.107	183.268
2/24/2004 0:00	1.085	182.854
2/25/2004 0:00	1.079	183.323
2/26/2004 0:00	1.052	182.972
2/27/2004 0:00	1.051	183.495
2/28/2004 0:00	1.087	183.115
2/29/2004 0:00	1.057	183.172
3/1/2004 0:00	1.05	183.546
3/2/2004 0:00	1.024	183.23
3/3/2004 0:00	0.998	183.318
3/4/2004 0:00	0.913	183.468
3/5/2004 0:00	0.896	183.562
3/6/2004 0:00	0.928	183.358
3/7/2004 0:00	0.937	183.492
3/8/2004 0:00	0.898	183.907
3/9/2004 0:00	0.894	183.808
3/10/2004 0:00	0.917	184.006
3/11/2004 0:00	0.911	178.064
3/12/2004 0:00	0.887	184.164
3/13/2004 0:00	1.14	183.785
3/14/2004 0:00	0.949	183.044
3/15/2004 0:00	0.92	183.777
3/16/2004 0:00	0.883	184.157
3/17/2004 0:00	0.901	184.455

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
3/18/2004 0:00	0.896	184.393
3/19/2004 0:00	0.907	184.771
3/20/2004 0:00	0.952	184.715
3/21/2004 0:00	0.941	184.932
3/22/2004 0:00	0.898	185.155
3/23/2004 0:00	0.904	185.471
3/24/2004 0:00	0.911	185.2
3/25/2004 0:00	0.904	185.309
3/26/2004 0:00	0.908	185.167
3/27/2004 0:00	0.945	185.037
3/28/2004 0:00	0.947	184.92
3/29/2004 0:00	0.919	185.067
3/30/2004 0:00	0.901	185.161
3/31/2004 0:00	0.896	184.609
4/1/2004 0:00	1.07	184.851
4/2/2004 0:00	1.098	184.303
4/3/2004 0:00	1.034	184.423
4/4/2004 0:00	0.986	183.897
4/5/2004 0:00	0.908	183.592
4/6/2004 0:00	0.919	184.742
4/7/2004 0:00	0.914	184.556
4/8/2004 0:00	0.901	184.444
4/9/2004 0:00	0.924	184.554
4/10/2004 0:00	0.953	184.119
4/11/2004 0:00	0.905	183.978
4/12/2004 0:00	0.905	183.985
4/13/2004 0:00	0.95	184.309
4/14/2004 0:00	0.914	183.866
4/15/2004 0:00	0.896	183.84
4/16/2004 0:00	0.9	183.918
4/17/2004 0:00	0.944	183.671
4/18/2004 0:00	0.922	183.498
4/19/2004 0:00	0.945	183.555
4/20/2004 0:00	0.942	183.431
4/21/2004 0:00	0.917	183.004
4/22/2004 0:00	0.944	182.497
4/23/2004 0:00	0.878	182.829
4/24/2004 0:00	0.931	182.881
4/25/2004 0:00	0.928	183.059
4/26/2004 0:00	0.888	182.84
4/27/2004 0:00	0.903	182.996
4/28/2004 0:00	0.911	182.905
4/29/2004 0:00	0.931	182.59
4/30/2004 0:00	0.959	182.481
5/1/2004 0:00	0.969	181.757
5/2/2004 0:00	0.958	181.638
5/3/2004 0:00	0.925	181.967
5/4/2004 0:00	0.916	181.415
5/5/2004 0:00	0.931	181.994
5/6/2004 0:00	0.913	182.41
5/7/2004 0:00	0.936	181.368

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
5/8/2004 0:00	0.931	182.06
5/9/2004 0:00	0.905	182.338
5/10/2004 0:00	0.919	182.568
5/11/2004 0:00	0.982	181.67
5/12/2004 0:00	0.971	181.285
5/13/2004 0:00	0.964	180.856
5/14/2004 0:00	0.954	181.781
5/15/2004 0:00	1.384	181.6
5/16/2004 0:00	0.994	180.943
5/17/2004 0:00	0.994	181.465
5/18/2004 0:00	1.006	181.987
5/19/2004 0:00	0.992	181.153
5/20/2004 0:00	1.016	181.083
5/21/2004 0:00	1.025	181.117
5/22/2004 0:00	1.016	180.858
5/23/2004 0:00	1.029	181.418
5/24/2004 0:00	0.97	181.776
5/25/2004 0:00	0.966	182.062
5/26/2004 0:00	0.968	182.125
5/27/2004 0:00	0.983	182.003
5/28/2004 0:00	0.962	182.169
5/29/2004 0:00	0.982	182.22
5/30/2004 0:00	0.953	182.047
5/31/2004 0:00	1.05	181.508
6/1/2004 0:00	0.976	181.894
6/2/2004 0:00	1.046	180.872
6/3/2004 0:00	1.037	180.715
6/4/2004 0:00	1.025	180.56
6/5/2004 0:00	0.988	180.576
6/6/2004 0:00	0.972	180.926
6/7/2004 0:00	0.989	180.982
6/8/2004 0:00	1.125	180.521
6/9/2004 0:00	1.148	180.085
6/10/2004 0:00	1.025	180.566
6/11/2004 0:00	1.073	180.752
6/12/2004 0:00	1.095	180.918
6/13/2004 0:00	1.106	180.879
6/14/2004 0:00	1.116	180.995
6/15/2004 0:00	1.202	180.671
6/16/2004 0:00	1.185	180.985
6/17/2004 0:00	1.151	181.841
6/18/2004 0:00	1.077	180.721
6/19/2004 0:00	1.083	181.318
6/20/2004 0:00	1.037	181.308
6/21/2004 0:00	1.09	181.206
6/22/2004 0:00	1.131	183.46
6/23/2004 0:00	1.147	182.82
6/24/2004 0:00	1.168	183.442
6/25/2004 0:00	1.127	182.216
6/26/2004 0:00	1.025	181.045
6/27/2004 0:00	1.027	180.998

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
6/28/2004 0:00	1.18	181.958
6/29/2004 0:00	1.202	182.761
6/30/2004 0:00	1.269	183.446
7/1/2004 0:00	1.257	183.088
7/2/2004 0:00	1.162	179.79
7/3/2004 0:00	1.085	178.764
7/4/2004 0:00	1.047	179.172
7/5/2004 0:00	1.068	179.666
7/6/2004 0:00	1.176	181.74
7/7/2004 0:00	1.222	180.83
7/8/2004 0:00	1.221	182.651
7/9/2004 0:00	1.236	183.054
7/10/2004 0:00	1.181	181.521
7/11/2004 0:00	1.157	182.012
7/12/2004 0:00	1.269	183.443
7/13/2004 0:00	1.179	182.362
7/14/2004 0:00	1.171	183.765
7/15/2004 0:00	1.218	184.137
7/16/2004 0:00	1.257	183.798
7/17/2004 0:00	1.244	184.4
7/18/2004 0:00	1.201	183.184
7/19/2004 0:00	1.2	183.704
7/20/2004 0:00	1.281	184.344
7/21/2004 0:00	1.316	184.086
7/22/2004 0:00	1.352	184.327
7/23/2004 0:00	1.328	184.797
7/24/2004 0:00	1.17	182.528
7/25/2004 0:00	1.151	181.981
7/26/2004 0:00	1.212	182.973
7/27/2004 0:00	1.149	182.429
7/28/2004 0:00	1.112	182.124
7/29/2004 0:00	1.191	183.06
7/30/2004 0:00	1.242	183.112
7/31/2004 0:00	1.195	182.185
8/1/2004 0:00	1.146	181.463
8/2/2004 0:00	1.266	182.715
8/3/2004 0:00	1.298	183.515
8/4/2004 0:00	1.26	182.979
8/5/2004 0:00	1.193	183.007
8/6/2004 0:00	1.17	182.869
8/7/2004 0:00	1.211	182.123
8/8/2004 0:00	1.117	181.966
8/9/2004 0:00	1.237	183.096
8/10/2004 0:00	1.261	185.377
8/11/2004 0:00	1.249	185.825
8/12/2004 0:00	1.264	185.782
8/13/2004 0:00	1.074	178.869
8/14/2004 0:00	0.992	175.663
8/15/2004 0:00	0.969	176.109
8/16/2004 0:00	0.983	174.155
8/17/2004 0:00	0.984	176.065

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
8/18/2004 0:00	1.005	176.332
8/19/2004 0:00	1.06	176.159
8/20/2004 0:00	1.059	176.332
8/21/2004 0:00	0.99	176.454
8/22/2004 0:00	0.972	176.978
8/23/2004 0:00	0.992	176.799
8/24/2004 0:00	0.99	177.245
8/25/2004 0:00	0.992	177.728
8/26/2004 0:00	1.024	177.547
8/27/2004 0:00	1.029	177.271
8/28/2004 0:00	1.03	176.625
8/29/2004 0:00	1.036	176.519
8/30/2004 0:00	1.081	177.385
8/31/2004 0:00	1.017	177.284
9/1/2004 0:00	1.283	177.398
9/2/2004 0:00	1.089	177.502
9/3/2004 0:00	1.056	177.377
9/4/2004 0:00	1.033	177.49
9/5/2004 0:00	0.978	177.856
9/6/2004 0:00	1.041	177.858
9/7/2004 0:00	0.991	178.084
9/8/2004 0:00	0.991	177.752
9/9/2004 0:00	0.991	178.02
9/10/2004 0:00	0.991	178.09
9/11/2004 0:00	0.991	178.283
9/12/2004 0:00	0.991	178.35
9/13/2004 0:00	0.991	178.677
9/14/2004 0:00	0.991	178.976
9/15/2004 0:00	0.991	178.792
9/16/2004 0:00	0.991	166.019
9/17/2004 0:00	1.18	179.504
9/18/2004 0:00	1.148	178.918
9/19/2004 0:00	1.107	178.561
9/20/2004 0:00	1.087	179.848
9/21/2004 0:00	1.065	179.491
9/22/2004 0:00	1.111	179.482
9/23/2004 0:00	1.09	178.981
9/24/2004 0:00	1.076	179.343
9/25/2004 0:00	1.062	178.417
9/26/2004 0:00	1.044	177.903
9/27/2004 0:00	1.071	178.944
9/28/2004 0:00	1.073	179.298
9/29/2004 0:00	1.006	178.267
9/30/2004 0:00	1	179.083
10/1/2004 0:00	1.042	179.808
10/2/2004 0:00	1.004	178.111
10/3/2004 0:00	1.014	178.165
10/4/2004 0:00	1.04	179.028
10/5/2004 0:00	1.079	179.589
10/6/2004 0:00	1.058	179.419
10/7/2004 0:00	1.128	180.397

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
10/8/2004 0:00	1.077	179.566
10/9/2004 0:00	1.067	179.171
10/10/2004 0:00	1.017	178.905
10/11/2004 0:00	1.08	178.803
10/12/2004 0:00	0.584	180.482
10/13/2004 0:00	0	
10/14/2004 0:00	0	179.427
10/15/2004 0:00	0	180.108
10/16/2004 0:00	0	179.818
10/17/2004 0:00	0	180.116
10/18/2004 0:00	0	180.443
10/19/2004 0:00	0	180.634
10/20/2004 0:00	0	180.856
10/21/2004 0:00	0	180.836
10/22/2004 0:00	0	181.1
10/23/2004 0:00	0	180.885
10/24/2004 0:00	0	180.967
10/25/2004 0:00	0	180.918
10/26/2004 0:00	0	181.25
10/27/2004 0:00	0	181.761
10/28/2004 0:00	0	181.049
10/29/2004 0:00	0	181.437
10/30/2004 0:00	0	180.827
10/31/2004 0:00	0	181.313
11/1/2004 0:00	0	181.22
11/2/2004 0:00	0	181.52
11/3/2004 0:00	0	181.647
11/4/2004 0:00	0	181.696
11/5/2004 0:00	0	182.076
11/6/2004 0:00	0	181.405
11/7/2004 0:00	0	181.162
11/8/2004 0:00	0	182.304
11/9/2004 0:00	0	182.229
11/10/2004 0:00	0	182.317
11/11/2004 0:00	0	182.328
11/12/2004 0:00	0	182.349
11/13/2004 0:00	0	181.755
11/14/2004 0:00	0	181.686
11/15/2004 0:00	0	182.213
11/16/2004 0:00	0	181.919
11/17/2004 0:00	0	182.318
11/18/2004 0:00	0	182.77
11/19/2004 0:00	0	182.737
11/20/2004 0:00	0	182.039
11/21/2004 0:00	0	182.158
11/22/2004 0:00	0	182.998
11/23/2004 0:00	0	182.492
11/24/2004 0:00	0	182.355
11/25/2004 0:00	0	181.467
11/26/2004 0:00	0	181.736
11/27/2004 0:00	0	181.499

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
11/28/2004 0:00	0	181.882
11/29/2004 0:00	0	166.426
11/30/2004 0:00	0	
12/1/2004 0:00	0	
12/2/2004 0:00	0	
12/3/2004 0:00	0	
12/4/2004 0:00	0	
12/5/2004 0:00	0	
12/6/2004 0:00	0	
12/7/2004 0:00	0	
12/8/2004 0:00	0	
12/9/2004 0:00	0	
12/10/2004 0:00	0	
12/11/2004 0:00	0	
12/12/2004 0:00	0	
12/13/2004 0:00	0	
12/14/2004 0:00	0	
12/15/2004 0:00	0	
12/16/2004 0:00	0	
12/17/2004 0:00	0	
12/18/2004 0:00	0	
12/19/2004 0:00	0	
12/20/2004 0:00	0	
12/21/2004 0:00	0	
12/22/2004 0:00	0	
12/23/2004 0:00	0	
12/24/2004 0:00	0	
12/25/2004 0:00	0	
12/26/2004 0:00	0	
12/27/2004 0:00	0	
12/28/2004 0:00	0	
12/29/2004 0:00	0	
12/30/2004 0:00	0	
12/31/2004 0:00	0	
1/1/2005 0:00	0	
1/2/2005 0:00	0	
1/3/2005 0:00	0	
1/4/2005 0:00	0	
1/5/2005 0:00	0	
1/6/2005 0:00	0	
1/7/2005 0:00	0	
1/8/2005 0:00	0	
1/9/2005 0:00	0	
1/10/2005 0:00	0	
1/11/2005 0:00	0	
1/12/2005 0:00	0	
1/13/2005 0:00	0	
1/14/2005 0:00	0	
1/15/2005 0:00	0	
1/16/2005 0:00	0	
1/17/2005 0:00	0	

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
1/18/2005 0:00	0	
1/19/2005 0:00	0	
1/20/2005 0:00	0	
1/21/2005 0:00	0	
1/22/2005 0:00	0	
1/23/2005 0:00	0	
1/24/2005 0:00	0	
1/25/2005 0:00	0	
1/26/2005 0:00	0	
1/27/2005 0:00	0	
1/28/2005 0:00	0	
1/29/2005 0:00	0	
1/30/2005 0:00	0	
1/31/2005 0:00	0	
2/1/2005 0:00	0	
2/2/2005 0:00	0	
2/3/2005 0:00	0	
2/4/2005 0:00	0	
2/5/2005 0:00	0	
2/6/2005 0:00	0	
2/7/2005 0:00	0	
2/8/2005 0:00	0	
2/9/2005 0:00	0	
2/10/2005 0:00	0	
2/11/2005 0:00	0	
2/12/2005 0:00	0	
2/13/2005 0:00	0	
2/14/2005 0:00	0	
2/15/2005 0:00	0	
2/16/2005 0:00	0	
2/17/2005 0:00	0	
2/18/2005 0:00	0	
2/19/2005 0:00	0	
2/20/2005 0:00	0	
2/21/2005 0:00	0	
2/22/2005 0:00	0	
2/23/2005 0:00	0	
2/24/2005 0:00	0	
2/25/2005 0:00	0	
2/26/2005 0:00	0	
2/27/2005 0:00	0	
2/28/2005 0:00	0	
3/1/2005 0:00	0	
3/2/2005 0:00	0	
3/3/2005 0:00	0	
3/4/2005 0:00	0	
3/5/2005 0:00	0	
3/6/2005 0:00	0	
3/7/2005 0:00	0	
3/8/2005 0:00	0	
3/9/2005 0:00	0	

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
3/10/2005 0:00	0	
3/11/2005 0:00	0	
3/12/2005 0:00	0	
3/13/2005 0:00	0	
3/14/2005 0:00	0	
3/15/2005 0:00	0	
3/16/2005 0:00	0	
3/17/2005 0:00	0	
3/18/2005 0:00	0	
3/19/2005 0:00	0	
3/20/2005 0:00	0	
3/21/2005 0:00	0	
3/22/2005 0:00	0	
3/23/2005 0:00	0	
3/24/2005 0:00	0	
3/25/2005 0:00	0	
3/26/2005 0:00	0	
3/27/2005 0:00	0	
3/28/2005 0:00	0	
3/29/2005 0:00	0	
3/30/2005 0:00	0	
3/31/2005 0:00	0	
4/1/2005 0:00	0	
4/2/2005 0:00	0	
4/3/2005 0:00	0	
4/4/2005 0:00	0	
4/5/2005 0:00	0	
4/6/2005 0:00	0	
4/7/2005 0:00	0	
4/8/2005 0:00	0	
4/9/2005 0:00	0	
4/10/2005 0:00	0	
4/11/2005 0:00	0	
4/12/2005 0:00	0	
4/13/2005 0:00	0	
4/14/2005 0:00	0	
4/15/2005 0:00	0	
4/16/2005 0:00	0	
4/17/2005 0:00	0	
4/18/2005 0:00	0	
4/19/2005 0:00	0	
4/20/2005 0:00	0	
4/21/2005 0:00	0	
4/22/2005 0:00	0	
4/23/2005 0:00	0	
4/24/2005 0:00	0	
4/25/2005 0:00	0	
4/26/2005 0:00	0	
4/27/2005 0:00	0	
4/28/2005 0:00	0	
4/29/2005 0:00	0	

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
4/30/2005 0:00	0	
5/1/2005 0:00	0	
5/2/2005 0:00	0	
5/3/2005 0:00	0	
5/4/2005 0:00	0	
5/5/2005 0:00	0	
5/6/2005 0:00	0	
5/7/2005 0:00	0	
5/8/2005 0:00	0	
5/9/2005 0:00	0	
5/10/2005 0:00	0	
5/11/2005 0:00	0	
5/12/2005 0:00	0	
5/13/2005 0:00	0	
5/14/2005 0:00	0	
5/15/2005 0:00	0	
5/16/2005 0:00	0	
5/17/2005 0:00	0	
5/18/2005 0:00	0	
5/19/2005 0:00	0	
5/20/2005 0:00	0	
5/21/2005 0:00	0	
5/22/2005 0:00	0	
5/23/2005 0:00	0	
5/24/2005 0:00	0	
5/25/2005 0:00	0	
5/26/2005 0:00	0	
5/27/2005 0:00	0	
5/28/2005 0:00	0	
5/29/2005 0:00	0	
5/30/2005 0:00	0	
5/31/2005 0:00	0	
6/1/2005 0:00	0	
6/2/2005 0:00	0	
6/3/2005 0:00	0	
6/4/2005 0:00	0	
6/5/2005 0:00	0	
6/6/2005 0:00	0	
6/7/2005 0:00	0	
6/8/2005 0:00	0	178.778
6/9/2005 0:00	0	179.743
6/10/2005 0:00	0	179.731
6/11/2005 0:00	0	179.585
6/12/2005 0:00	0	179.552
6/13/2005 0:00	0	179.738
6/14/2005 0:00	0	179.71
6/15/2005 0:00	0	180.619
6/16/2005 0:00	0	180.673
6/17/2005 0:00	0	180.159
6/18/2005 0:00	0	180.443
6/19/2005 0:00	0	180.54

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
6/20/2005 0:00	0	184.007
6/21/2005 0:00	0	183.715
6/22/2005 0:00	0	183.694
6/23/2005 0:00	0	182.204
6/24/2005 0:00	0	179.489
6/25/2005 0:00	0	179.167
6/26/2005 0:00	0	179.359
6/27/2005 0:00	0	179.436
6/28/2005 0:00	0	179.393
6/29/2005 0:00	0	180.196
6/30/2005 0:00	0	179.392
7/1/2005 0:00	0	179.025
7/2/2005 0:00	0	178.21
7/3/2005 0:00	0	176.216
7/4/2005 0:00	0	176.991
7/5/2005 0:00	0	179.828
7/6/2005 0:00	0	178.701
7/7/2005 0:00	0	177.141
7/8/2005 0:00	0	176.871
7/9/2005 0:00	0	177.005
7/10/2005 0:00	0	177.516
7/11/2005 0:00	0	179.832
7/12/2005 0:00	0.437	179.18
7/13/2005 0:00	0.951	179.172
7/14/2005 0:00	0.95	179.186
7/15/2005 0:00	0.964	178.716
7/16/2005 0:00	0.959	178.191
7/17/2005 0:00	0.919	177.526
7/18/2005 0:00	0.906	179.276
7/19/2005 0:00	0.934	179.747
7/20/2005 0:00	0.903	171.863
7/21/2005 0:00	0.952	178.842
7/22/2005 0:00	0.967	178.547
7/23/2005 0:00	0.927	175.731
7/24/2005 0:00	0.912	175.446
7/25/2005 0:00	0.928	178.679
7/26/2005 0:00	0.947	178.626
7/27/2005 0:00	0.94	177.945
7/28/2005 0:00	0.928	176.61
7/29/2005 0:00	0.934	176.213
7/30/2005 0:00	0.947	174.174
7/31/2005 0:00	0.903	173.532
8/1/2005 0:00	0.91	176.486
8/2/2005 0:00	0.889	177.711
8/3/2005 0:00	0.905	176.298
8/4/2005 0:00	0.908	176.413
8/5/2005 0:00	0.923	176.74
8/6/2005 0:00	0.921	174.201
8/7/2005 0:00	0.919	174.525
8/8/2005 0:00	0.952	177.352
8/9/2005 0:00	0.922	177.524

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
8/10/2005 0:00	0.939	178.47
8/11/2005 0:00	0.947	178.147
8/12/2005 0:00	0.907	176.591
8/13/2005 0:00	0.937	175.812
8/14/2005 0:00	0.916	173.769
8/15/2005 0:00	0.875	174.934
8/16/2005 0:00	0.884	175.127
8/17/2005 0:00	0.908	176.467
8/18/2005 0:00	0.904	175.172
8/19/2005 0:00	0.911	175.499
8/20/2005 0:00	0.926	174.413
8/21/2005 0:00	0.924	174.483
8/22/2005 0:00	0.917	176.677
8/23/2005 0:00	0.908	176.175
8/24/2005 0:00	0.884	174.914
8/25/2005 0:00	0.885	175.422
8/26/2005 0:00	0.902	176.273
8/27/2005 0:00	0.925	174.463
8/28/2005 0:00	0.917	174.145
8/29/2005 0:00	0.958	175.93
8/30/2005 0:00	0.86	174.187
8/31/2005 0:00	0.884	175.645
9/1/2005 0:00	0.884	175.717
9/2/2005 0:00	0.904	175.61
9/3/2005 0:00	0.899	174.95
9/4/2005 0:00	0.861	174.534
9/5/2005 0:00	0.9	175.304
9/6/2005 0:00	0.903	175.901
9/7/2005 0:00	0.911	176.147
9/8/2005 0:00	0.905	176.166
9/9/2005 0:00	0.891	175.862
9/10/2005 0:00	0.948	175.743
9/11/2005 0:00	0.944	175.997
9/12/2005 0:00	0.921	176.633
9/13/2005 0:00	0.909	176.256
9/14/2005 0:00	0.918	176.407
9/15/2005 0:00	0.892	176.021
9/16/2005 0:00	0.88	175.432
9/17/2005 0:00	0.913	175.499
9/18/2005 0:00	0.927	175.991
9/19/2005 0:00	0.895	176.551
9/20/2005 0:00	0.867	175.64
9/21/2005 0:00	0.878	175.193
9/22/2005 0:00	0.868	175.261
9/23/2005 0:00	0.856	175.246
9/24/2005 0:00	0.893	175.013
9/25/2005 0:00	0.887	175.148
9/26/2005 0:00	0.859	175.513
9/27/2005 0:00	0.869	175.072
9/28/2005 0:00	0.864	174.8
9/29/2005 0:00	1.106	174.576

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
9/30/2005 0:00	1.234	174.197
10/1/2005 0:00	1.273	174.007
10/2/2005 0:00	1.271	174.215
10/3/2005 0:00	1.27	174.357
10/4/2005 0:00	1.251	174.326
10/5/2005 0:00	1.269	174.419
10/6/2005 0:00	1.257	174.325
10/7/2005 0:00	1.234	174.242
10/8/2005 0:00	1.247	174.04
10/9/2005 0:00	1.254	173.99
10/10/2005 0:00	1.24	174.245
10/11/2005 0:00	1.22	174.483
10/12/2005 0:00	1.213	174.484
10/13/2005 0:00	1.215	174.386
10/14/2005 0:00	1.21	174.811
10/15/2005 0:00	1.35	174.804
10/16/2005 0:00	1.29	174.718
10/17/2005 0:00	1.222	175.237
10/18/2005 0:00	1.201	175.432
10/19/2005 0:00	1.22	176.173
10/20/2005 0:00	1.21	176.242
10/21/2005 0:00	1.207	176.491
10/22/2005 0:00	1.238	176.751
10/23/2005 0:00	1.251	176.914
10/24/2005 0:00	1.212	176.839
10/25/2005 0:00	1.252	176.918
10/26/2005 0:00	1.267	175.423
10/27/2005 0:00	0.709	174.367
10/28/2005 0:00	0.32	174.691
10/29/2005 0:00	0.458	174.674
10/30/2005 0:00	0.464	174.638
10/31/2005 0:00	0.345	174.866
11/1/2005 0:00	0.398	174.855
11/2/2005 0:00	0.435	174.934
11/3/2005 0:00	1.437	174.207
11/4/2005 0:00	1.124	174.356
11/5/2005 0:00	0.652	174.466
11/6/2005 0:00	0.872	174.743
11/7/2005 0:00	0.752	174.937
11/8/2005 0:00	0.348	175.146
11/9/2005 0:00	0.339	175.233
11/10/2005 0:00	0.228	175.208
11/11/2005 0:00	0.322	175.33
11/12/2005 0:00	0.297	175.343
11/13/2005 0:00	0.422	175.144
11/14/2005 0:00	0.548	175.552
11/15/2005 0:00	0.576	166.964
11/16/2005 0:00	0.647	165.286
11/17/2005 0:00	0.568	152.151
11/18/2005 0:00	0.54	143.553
11/19/2005 0:00	0.603	143.463

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
11/20/2005 0:00	0.61	143.485
11/21/2005 0:00	0.533	145.071
11/22/2005 0:00	0.453	161.341
11/23/2005 0:00	0.224	173.361
11/24/2005 0:00	0.29	174.633
11/25/2005 0:00	0.224	174.952
11/26/2005 0:00	0.271	174.979
11/27/2005 0:00	0.292	175.034
11/28/2005 0:00	0.274	175.206
11/29/2005 0:00	0.287	175.02
11/30/2005 0:00	0.224	175.199
12/1/2005 0:00	0.211	175.305
12/2/2005 0:00	0.168	175.32
12/3/2005 0:00	0.268	175.377
12/4/2005 0:00	0.218	175.507
12/5/2005 0:00	0.151	175.514
12/6/2005 0:00	0.137	175.426
12/7/2005 0:00	0.14	175.637
12/8/2005 0:00	0.113	175.68
12/9/2005 0:00	0.062	175.691
12/10/2005 0:00	0.209	175.806
12/11/2005 0:00	0.275	175.661
12/12/2005 0:00	0.166	175.979
12/13/2005 0:00	0.169	175.318
12/14/2005 0:00	0.15	176.032
12/15/2005 0:00	0.098	176.009
12/16/2005 0:00	0.081	176.034
12/17/2005 0:00	0.223	176.036
12/18/2005 0:00	0.249	176.151
12/19/2005 0:00	0.16	176.236
12/20/2005 0:00	0.101	176.084
12/21/2005 0:00	0.082	177.485
12/22/2005 0:00	0.056	177.875
12/23/2005 0:00	0.076	178.366
12/24/2005 0:00	0.174	179.076
12/25/2005 0:00	0.063	180.414
12/26/2005 0:00	0.104	179.782
12/27/2005 0:00	0.056	178.803
12/28/2005 0:00	0.265	178.355
12/29/2005 0:00	0.393	177.788
12/30/2005 0:00	0.347	177.929
12/31/2005 0:00	0.432	178.072
1/1/2006 0:00	0.274	178.522
1/2/2006 0:00	0.475	178.845
1/3/2006 0:00	0.233	177.998
1/4/2006 0:00	0.239	178.147
1/5/2006 0:00	0.215	176.263
1/6/2006 0:00	0.207	176.093
1/7/2006 0:00	0.331	176.173
1/8/2006 0:00	0.345	176.251
1/9/2006 0:00	0.214	176.289

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
1/10/2006 0:00	0.241	176.242
1/11/2006 0:00	0.349	176.283
1/12/2006 0:00	0.255	176.245
1/13/2006 0:00	0.213	176.352
1/14/2006 0:00	0.376	176.299
1/15/2006 0:00	0.389	176.565
1/16/2006 0:00	0.466	176.546
1/17/2006 0:00	0.269	176.379
1/18/2006 0:00	0.246	176.315
1/19/2006 0:00	0.283	176.197
1/20/2006 0:00	0.215	176.202
1/21/2006 0:00	0.26	178.156
1/22/2006 0:00	0.288	178.68
1/23/2006 0:00	0.115	178.294
1/24/2006 0:00	0.202	176.093
1/25/2006 0:00	0.209	176.199
1/26/2006 0:00	0.206	176.128
1/27/2006 0:00	0.177	176.198
1/28/2006 0:00	0.297	176.14
1/29/2006 0:00	0.383	176.226
1/30/2006 0:00	0.247	176.36
1/31/2006 0:00	0.184	176.375
2/1/2006 0:00	0.202	176.144
2/2/2006 0:00	0.197	176.084
2/3/2006 0:00	0.149	176.154
2/4/2006 0:00	0.334	176.193
2/5/2006 0:00	0.358	176.156
2/6/2006 0:00	0.236	176.332
2/7/2006 0:00	0.215	176.122
2/8/2006 0:00	0.285	176.189
2/9/2006 0:00	0.257	176.182
2/10/2006 0:00	0.169	176.285
2/11/2006 0:00	0.303	176.21
2/12/2006 0:00	0.278	176.509
2/13/2006 0:00	0.309	176.668
2/14/2006 0:00	0.225	176.422
2/15/2006 0:00	0.267	176.428
2/16/2006 0:00	0.261	176.429
2/17/2006 0:00	0.245	176.58
2/18/2006 0:00	0.366	176.706
2/19/2006 0:00	0.348	176.766
2/20/2006 0:00	0.416	176.745
2/21/2006 0:00	0.285	176.767
2/22/2006 0:00	0.32	176.872
2/23/2006 0:00	0.261	176.638
2/24/2006 0:00	0.303	176.735
2/25/2006 0:00	0.334	176.749
2/26/2006 0:00	0.468	176.856
2/27/2006 0:00	0.301	176.801
2/28/2006 0:00	0.317	176.686
3/1/2006 0:00	0.357	176.801

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
3/2/2006 0:00	0.322	176.773
3/3/2006 0:00	0.338	176.865
3/4/2006 0:00	0.502	176.821
3/5/2006 0:00	0.502	176.649
3/6/2006 0:00	0.4	172.988
3/7/2006 0:00	0.44	176.71
3/8/2006 0:00	0.361	176.524
3/9/2006 0:00	0.391	176.46
3/10/2006 0:00	0.364	176.189
3/11/2006 0:00	0.499	176.233
3/12/2006 0:00	0.491	176.367
3/13/2006 0:00	0.446	176.323
3/14/2006 0:00	0.373	176.208
3/15/2006 0:00	0.381	176.365
3/16/2006 0:00	0.396	176.351
3/17/2006 0:00	0.347	176.203
3/18/2006 0:00	0.441	176.241
3/19/2006 0:00	0.609	176.313
3/20/2006 0:00	0.356	176.357
3/21/2006 0:00	0.325	176.18
3/22/2006 0:00	0.348	176.396
3/23/2006 0:00	0.371	176.341
3/24/2006 0:00	0.335	176.304
3/25/2006 0:00	0.489	176.441
3/26/2006 0:00	0.496	176.541
3/27/2006 0:00	0.438	176.401
3/28/2006 0:00	0.451	176.262
3/29/2006 0:00	0.386	176.098
3/30/2006 0:00	0.404	172.936
3/31/2006 0:00	0.527	176.511
4/1/2006 0:00	0.51	176.321
4/2/2006 0:00	0.595	176.199
4/3/2006 0:00	0.432	176.219
4/4/2006 0:00	0.41	176.159
4/5/2006 0:00	0.387	176.138
4/6/2006 0:00	0.504	176.178
4/7/2006 0:00	0.441	176.176
4/8/2006 0:00	0.65	176.207
4/9/2006 0:00	0.66	176.194
4/10/2006 0:00	0.408	176.202
4/11/2006 0:00	0.186	178.228
4/12/2006 0:00	0.02	182.513
4/13/2006 0:00	0	
4/14/2006 0:00	0	
4/15/2006 0:00	0	
4/16/2006 0:00	0	
4/17/2006 0:00	0	
4/18/2006 0:00	0	
4/19/2006 0:00	0	
4/20/2006 0:00	0	
4/21/2006 0:00	0	

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
4/22/2006 0:00	0	
4/23/2006 0:00	0	
4/24/2006 0:00	0	
4/25/2006 0:00	0	
4/26/2006 0:00	0	
4/27/2006 0:00	0	
4/28/2006 0:00	0	
4/29/2006 0:00	0	
4/30/2006 0:00	0	
5/1/2006 0:00	0	
5/2/2006 0:00	0	
5/3/2006 0:00	0	
5/4/2006 0:00	0	
5/5/2006 0:00	0	
5/6/2006 0:00	0	
5/7/2006 0:00	0	
5/8/2006 0:00	0	
5/9/2006 0:00	0	
5/10/2006 0:00	0	
5/11/2006 0:00	0	
5/12/2006 0:00	0	
5/13/2006 0:00	0	
5/14/2006 0:00	0	
5/15/2006 0:00	0	
5/16/2006 0:00	0	
5/17/2006 0:00	0	
5/18/2006 0:00	0	
5/19/2006 0:00	0	
5/20/2006 0:00	0	
5/21/2006 0:00	0	
5/22/2006 0:00	0	
5/23/2006 0:00	0	
5/24/2006 0:00	0	
5/25/2006 0:00	0	
5/26/2006 0:00	0	
5/27/2006 0:00	0	
5/28/2006 0:00	0	
5/29/2006 0:00	0	
5/30/2006 0:00	0	
5/31/2006 0:00	0	
6/1/2006 0:00	0	
6/2/2006 0:00	0	
6/3/2006 0:00	0	
6/4/2006 0:00	0	
6/5/2006 0:00	0	
6/6/2006 0:00	0	
6/7/2006 0:00	0	
6/8/2006 0:00	0	
6/9/2006 0:00	0	
6/10/2006 0:00	0	179.307
6/11/2006 0:00	0	180.548

Meter 91 Flows:

Time	CH 1 High Flow	CH 2 Pressure (HGL)
6/12/2006 0:00	0	180.373
6/13/2006 0:00	0	161.397
6/14/2006 0:00	0	181.393
6/15/2006 0:00	0	183.282
6/16/2006 0:00	0	182.698
6/17/2006 0:00	0	182.917
6/18/2006 0:00	0	182.987
6/19/2006 0:00	0	180.912
6/20/2006 0:00	0	181.422
6/21/2006 0:00	0	181.867
6/22/2006 0:00	0	182.414
6/23/2006 0:00	0	182.402
6/24/2006 0:00	0	183.475
6/25/2006 0:00	0	184.122
6/26/2006 0:00	0	180.388
6/27/2006 0:00	0	174.285
6/28/2006 0:00	0	197.152
6/29/2006 0:00	0	184.344
6/30/2006 0:00	0	177.105
7/1/2006 0:00	0	177.646
7/2/2006 0:00	0	177.383
7/3/2006 0:00	0	177.983
7/4/2006 0:00	0	177.526
7/5/2006 0:00	0	180.511
7/6/2006 0:00	0	179.699
7/7/2006 0:00	0	182.681
7/8/2006 0:00	0	182.513
7/9/2006 0:00	0	182.065
7/10/2006 0:00	0	182.907
7/11/2006 0:00	0	183.027
7/12/2006 0:00	0	156.681
7/13/2006 0:00	0	123.896
7/14/2006 0:00	0	181.623
7/15/2006 0:00	0	182.634
7/16/2006 0:00	0	182.863
7/17/2006 0:00	0	176.754
7/18/2006 0:00	0	184.419
7/19/2006 0:00	0	183.642
7/20/2006 0:00	0	183.437
7/21/2006 0:00	0	183.693
7/22/2006 0:00	0	181.864
7/23/2006 0:00	0	182.056
7/24/2006 0:00	0.321	181.855
7/25/2006 0:00	0.591	182.123
7/26/2006 0:00	0.605	182.035
7/27/2006 0:00	0.603	181.673
7/28/2006 0:00	0.587	181.791
7/29/2006 0:00	0.607	182.919
7/30/2006 0:00	0.608	182.999
7/31/2006 0:00	0.626	182.508
8/1/2006 0:00	0.625	182.061

Meter 91 Flows:

Time
8/2/2006 0:00

CH 1 High Flow
0.614

CH 2 Pressure (HGL)
180.981

Appendix C

Stormwater Drainage System Analysis

NRCS Soil Survey Information

SOIL SURVEY OF MIDDLESEX COUNTY, MASSACHUSETTS

Assembly Square Full Build



SOIL SURVEY OF MIDDLESEX COUNTY, MASSACHUSETTS

Assembly Square Full Build

MAP LEGEND

	Soil Map Units
	Cities
	Detailed Counties
	Detailed States
	Interstate Highways
	Roads
	Rails
	Water
	Hydrography
	Oceans
	Escarpment, bedrock
	Escarpment, non-bedrock
	Gulley
	Levee
	Slope
	Blowout
	Borrow Pit
	Clay Spot
	Depression, closed
	Eroded Spot
	Gravel Pit
	Gravelly Spot
	Gulley
	Lava Flow
	Landfill
	Marsh or Swamp
	Miscellaneous Water
	Rock Outcrop
	Saline Spot
	Sandy Spot
	Slide or Slip
	Sinkhole
	Sodic Spot
	Spoil Area
	Stony Spot
	Very Stony Spot
	Perennial Water
	Wet Spot

MAP INFORMATION

Source of Map: Natural Resources Conservation Service
Web Soil Survey URL: <http://websoilsurvey.nrcs.usda.gov>

Coordinate System: UTM Zone 19

Soil Survey Area: Middlesex County, Massachusetts
Spatial Version of Data: 3
Soil Map Compilation Scale: 1:25000

Map comprised of aerial images photographed on these dates:
4/3/1995

The orthophoto or other base map on which the soil lines were compiled and digitized probably differs from the background imagery displayed on these maps. As a result, some minor shifting of map unit boundaries may be evident.

Map Unit Legend Summary

Middlesex County, Massachusetts

Map Unit Symbol	Map Unit Name	Acres in AOI	Percent of AOI
603	Urban land, wet substratum	72.0	94.8
655	Udorthents, wet substratum	3.9	5.2

**72" Outfall As-Built
Plan and Profile**

- Notes**
1. ALL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE MASSACHUSETTS DEPARTMENT OF HIGHWAYS, MASSACHUSETTS DEPARTMENT OF TRANSPORTATION, AND MASSACHUSETTS DEPARTMENT OF ENVIRONMENTAL AFFAIRS, AND THE LATEST EDITIONS OF THE FEDERAL HIGHWAY ADMINISTRATION, FEDERAL BUREAU OF SURVEY, AND FEDERAL BUREAU OF ROAD CONSTRUCTION.
 2. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 3. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 4. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 5. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 6. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 7. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 8. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 9. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.
 10. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

Sheet No. 1000-1000-1000

1. ALL WORK SHALL BE IN ACCORDANCE WITH THE LATEST EDITIONS OF THE MASSACHUSETTS DEPARTMENT OF HIGHWAYS, MASSACHUSETTS DEPARTMENT OF TRANSPORTATION, AND MASSACHUSETTS DEPARTMENT OF ENVIRONMENTAL AFFAIRS, AND THE LATEST EDITIONS OF THE FEDERAL HIGHWAY ADMINISTRATION, FEDERAL BUREAU OF SURVEY, AND FEDERAL BUREAU OF ROAD CONSTRUCTION.

2. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

3. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

4. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

5. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.


6. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

7. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.


8. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

9. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.


10. THE DESIGN OF THIS PROJECT IS BASED ON THE ASSUMPTION THAT THE EXISTING DRAINAGE SYSTEM IS ADEQUATE FOR THE PROPOSED DEVELOPMENT.

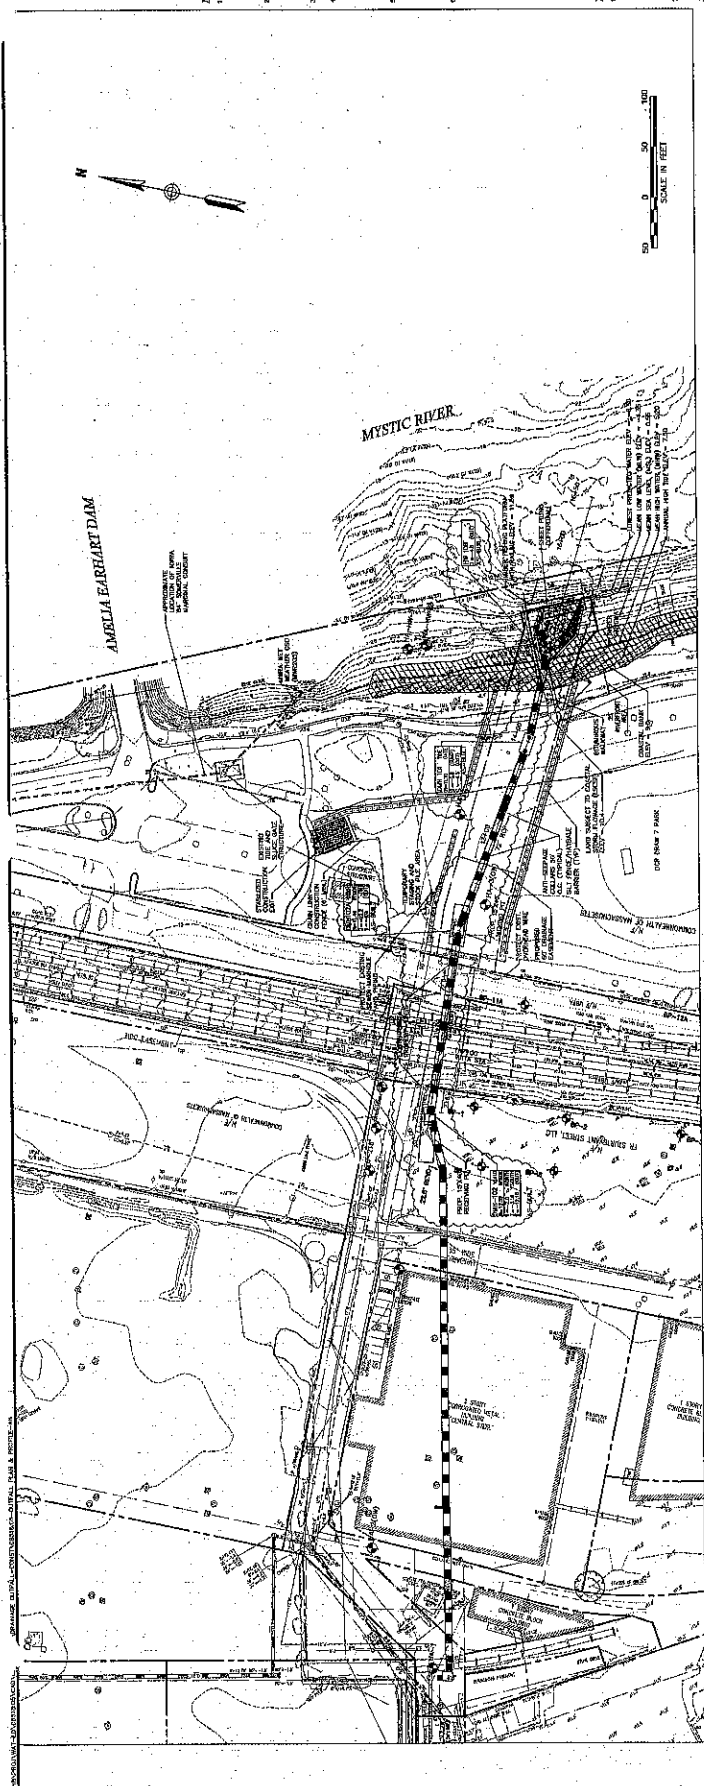

DRAINAGE OUTFALL PLAN VIEW

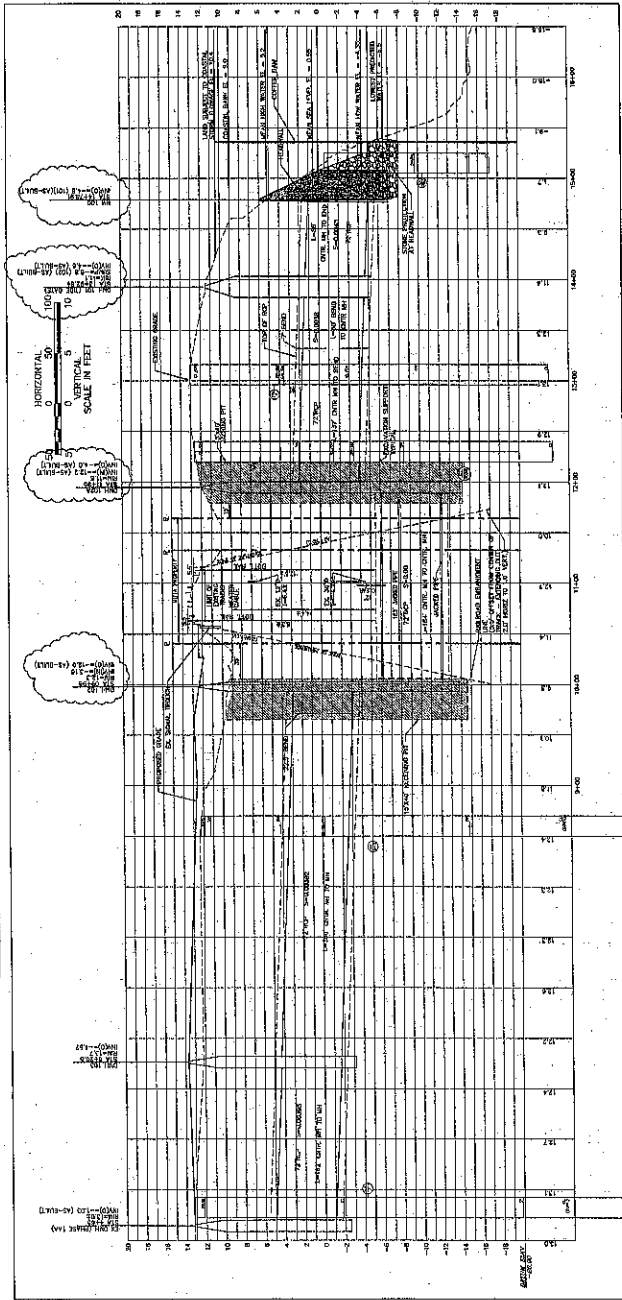

DRAINAGE OUTFALL PROFILE

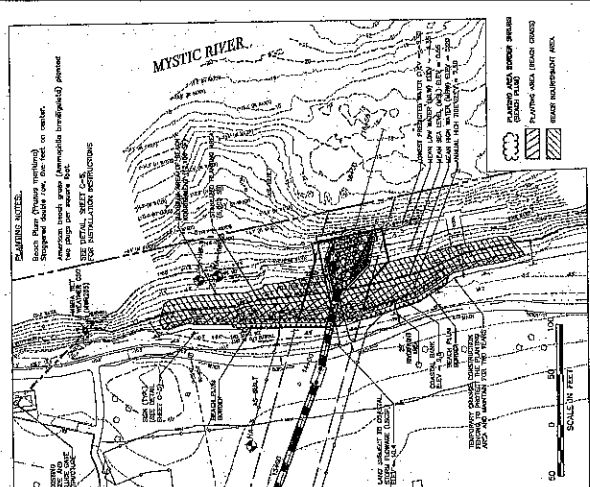

BEACH NOURISHMENT PLAN

Scenario: 10 Year with Tailwater
 Current Time Step: 0.000Hr
 Conduit FlexTable: Combined Pipe/Node Report

Start Node	Stop Node	Length (Unified) (ft)	System CA (acres)	System Intensity (in/h)	System Rational Flow (ft ³ /s)	Capacity (Full Flow) (ft ³ /s)	Velocity (Average) (ft/s)	Invert (Upstream) (ft)	Invert (Downstream) (ft)	Slope (ft/ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
CB-G6N	DMH-G6	14.0	0.118	5.300	0.63	5.04	4.37	7.50	7.22	0.020	7.83	7.46
CB-G4E	DMH-G4	9.0	0.273	5.300	1.46	5.04	5.55	7.00	6.82	0.020	7.65	7.68
DCB-G2E	DMH-G2	12.0	0.232	5.300	1.24	5.14	1.58	5.00	4.76	0.021	7.72	7.70
CB-G1E	DMH-G1	43.0	0.179	5.300	0.66	3.56	1.22	4.00	3.67	0.010	7.74	7.71
CB-G1NE	DMH-G1	56.0	0.098	5.300	0.62	3.56	0.67	4.00	3.44	0.010	7.73	7.71
DMH-G1	DMH-G2	45.0	0.277	5.082	1.41	77.20	0.11	2.90	2.77	0.003	7.70	7.70
DMH-G2	DMH-G3	42.0	0.509	3.829	2.02	79.91	0.16	2.77	2.64	0.003	7.68	7.68
DMH-G3	DMH-G4	166.0	0.509	3.438	1.76	79.09	0.14	2.64	2.17	0.003	7.68	7.68
DMH-G4	DMH-G5	203.0	0.762	2.435	1.92	62.14	0.15	2.17	1.79	0.002	7.65	7.65
RG-G1	DMH-G5	65.0	0.046	5.300	0.24	8.13	6.74	5.32	4.29	0.016	8.72	7.65
DMH-G5	DMH-G6	118.0	0.627	1.807	1.61	137.41	0.76	1.79	0.71	0.009	7.36	7.35
DMH-G6	DMH-G7	38.0	1.060	1.733	1.85	80.72	0.79	-0.73	-0.85	0.003	6.70	6.69
DMH-G7	DMH-G8	11.0	1.060	1.710	1.83	212.16	0.78	-0.85	-1.09	0.022	6.69	6.69
DMH-G8	DMH-G9	70.0	1.060	1.704	1.82	78.67	0.78	-1.09	-1.30	0.003	6.68	6.68
CB-F7NE	DMH-F7	12.0	0.219	5.300	1.17	5.24	5.37	9.00	8.74	0.022	9.46	9.08
CB-F7NW	DMH-F7	13.0	0.000	5.300	0.00	5.04	0.00	9.00	8.74	0.020	9.00	8.92
CB-F6NE	DMH-F6	12.0	0.195	5.300	1.04	5.24	5.20	9.00	8.74	0.022	9.43	9.49
CB-F6NW	DMH-F6	13.0	0.000	5.300	0.00	5.04	0.00	9.00	8.74	0.020	9.49	9.49
CB-F5NW	DMH-F5	13.0	0.212	5.300	1.13	5.04	1.44	9.00	8.74	0.020	10.32	10.32
CB-F5NE	DMH-F4	13.0	0.121	5.300	0.65	3.56	0.83	9.00	8.87	0.010	10.56	10.56
CB-F4NW	DMH-F4	12.0	0.123	5.300	0.66	3.71	0.83	9.00	8.87	0.011	10.66	10.56
CB-F4NE	DMH-F3	10.0	0.240	5.300	1.28	5.04	1.63	8.50	8.30	0.020	11.26	11.25
CB-F1NE	DMH-F1	9.0	0.083	5.300	0.44	3.76	0.65	9.90	9.80	0.011	11.35	11.34
DMH-F1	DMH-F2	78.0	0.614	5.285	2.72	6.83	1.54	8.30	7.97	0.004	11.34	11.29
DCB-F2E	DMH-F2	77.0	0.404	5.300	2.18	5.10	1.76	8.70	8.22	0.006	11.38	11.29
DMH-F2	DMH-F3	36.0	0.917	5.111	4.73	12.50	1.60	7.47	7.36	0.003	11.26	11.25
DMH-F3	DMH-F4	129.0	1.157	5.043	5.88	12.44	1.87	7.36	6.97	0.003	11.22	11.13
CB-C4SW	DMH-C4	12.0	0.075	5.300	0.40	5.04	0.61	9.10	8.86	0.020	11.22	11.22
CB-C4NW	DMH-C4	12.0	0.050	5.300	0.27	5.04	0.34	9.10	8.86	0.020	11.22	11.22
CB-C3SW	DMH-C3	12.0	0.028	5.300	0.16	11.12	0.19	9.60	8.43	0.008	11.22	11.22
CB-C3NW	DMH-C3	12.0	0.025	5.300	0.13	11.12	0.17	9.60	8.43	0.008	11.22	11.22
DMH-C3	DMH-C4	40.0	0.141	5.099	0.73	10.37	0.41	8.43	8.04	0.010	11.22	11.22
DMH-C4	DMH-C5	57.0	0.733	4.824	3.56	10.50	2.02	8.04	7.47	0.010	11.21	11.13
DMH-C5	DMH-C6	33.0	1.890	4.744	9.04	12.45	2.88	6.97	6.87	0.003	11.08	11.02
CB-C7SE	DMH-C7	14.0	0.106	5.300	0.57	5.04	0.72	9.20	8.92	0.020	11.37	11.37
CB-C7NE	DMH-C7	14.0	0.117	5.300	0.63	5.13	0.80	9.20	8.91	0.021	11.37	11.37
CB-C8SE	DMH-C8	14.0	0.146	5.300	0.78	5.04	0.99	10.70	10.42	0.020	12.55	12.54
CB-C8NE	DMH-C8	14.0	0.082	5.300	0.44	5.04	0.56	10.70	10.42	0.020	12.54	12.54
DMH-C8	DMH-C7	178.0	1.598	5.229	8.42	6.82	4.77	8.51	7.76	0.004	12.54	11.37
DMH-C7	DMH-C6	92.0	2.175	5.123	11.23	14.73	3.58	7.26	6.87	0.004	11.26	11.02
DMH-C6	DMH-F4	116.0	4.163	4.711	19.88	22.85	4.05	6.37	6.01	0.003	10.87	10.56
DMH-F4	DMH-F5	122.0	4.789	4.630	22.35	34.16	3.18	5.51	5.19	0.003	10.48	10.32
DMH-F5	DMH-D6	108.0	5.332	4.521	24.29	38.51	3.44	5.19	4.83	0.003	10.25	10.08
CB-D4NW	DMH-D4	12.0	0.112	5.300	0.60	3.56	10.30	10.18	10.18	0.010	10.62	10.48
CB-D4SW	DMH-D4	13.0	0.117	5.300	0.62	3.42	3.31	10.30	10.18	0.009	10.63	10.47
DMH-D4	DMH-D5	80.0	0.452	5.289	2.41	10.50	1.36	8.34	7.44	0.010	10.12	10.08
DCB-D6S	DMH-D6	12.0	0.434	5.300	2.32	5.04	4.11	8.80	8.56	0.020	11.51	11.41
CB-D7E	DMH-D7	54.0	0.133	5.300	0.71	5.18	0.91	8.83	7.69	0.021	11.59	11.57
DMH-D7	DMH-D8	53.0	0.995	5.131	5.15	7.90	2.91	7.89	7.39	0.006	11.54	11.41
DMH-D8	DMH-D5	179.0	1.428	5.050	7.31	8.08	4.65	7.39	6.33	0.006	11.23	10.08
DMH-D5	DMH-F6	123.0	7.212	4.432	32.22	38.58	4.69	4.83	4.46	0.003	9.86	9.49
DMH-F6	DMH-F7	122.0	7.870	4.357	34.57	36.73	5.02	4.45	4.09	0.003	9.35	8.92
DMH-F7	DMH-F8	23.0	8.089	4.288	34.97	43.98	5.08	4.09	3.99	0.004	8.16	8.07
DMH-F8	DMH-F9	10.0	8.089	4.275	34.86	94.32	5.08	3.99	3.79	0.020	7.82	7.89
DMH-F9	DMH-F10	79.0	8.089	4.270	34.82	38.76	5.05	3.79	3.55	0.003	7.74	7.45
CB-E2SE	DMH-E2	8.0	0.195	5.300	1.04	5.19	5.16	7.80	7.63	0.021	8.23	8.14
CB-E2NE	DMH-E2	49.0	0.154	5.300	0.82	3.56	3.69	7.80	7.31	0.010	8.18	8.14
DMH-E2	DMH-E1	33.0	0.348	5.262	1.85	3.56	4.58	7.31	6.98	0.010	8.08	8.03
DMH-E1	MF-68	9.0	0.348	5.242	1.84	3.36	2.34	5.56	5.48	0.009	8.03	8.01
CB-21	DMH-22	5.0	0.498	5.300	2.65	4.51	3.37	6.82	6.74	0.018	8.52	8.49
CB-20	DMH-22	49.0	0.428	5.300	2.29	3.53	2.91	6.82	6.34	0.010	8.70	8.49
CB-18	DMH-19	6.0	0.140	5.300	0.75	5.44	4.88	8.74	8.60	0.023	9.24	9.26
CB-17	DMH-19	49.0	0.141	5.300	0.75	3.60	3.62	8.74	8.24	0.010	9.26	9.26
CB-11	DMH-12	6.0	0.630	5.300	2.83	3.90	3.60	6.86	6.60	0.012	10.64	10.61
CB-10	DMH-12	49.0	0.419	5.300	2.24	3.56	2.85	6.86	6.17	0.010	10.60	10.61
CB-A8SE	DMH-A6	14.0	0.367	5.300	1.96	3.56	2.49	8.08	7.94	0.010	11.40	11.40
CB-A6N	DMH-A6	15.0	0.189	5.300	0.90	3.56	1.15	8.09	7.94	0.010	11.41	11.40
DMH-A6	DMH-A5	93.0	0.777	5.263	4.12	5.76	2.33	7.94	7.66	0.003	11.72	11.58
DMH-A5	DMH-A4	126.0	0.777	5.150	4.03	5.77	2.28	7.66	7.28	0.003	11.55	11.36
CB-A4S	DMH-A4	14.0	0.041	5.300	0.22	5.04	0.28	10.00	9.72	0.020	11.38	11.36
CB-A4N	DMH-A4	14.0	0.053	5.300	0.28	5.13	0.36	10.00	9.71	0.021	11.38	11.36
DMH-A4	DMH-A3	178.0	0.871	4.894	4.39	12.34	1.40	7.28	6.75	0.003	11.34	11.27
DMH-A3	DMH-A2	42.0	1.360	4.632	6.35	12.59	2.02	6.75	6.62	0.003	11.25	11.21
CB-A1S	DMH-A2	16.0	0.159	5.300	0.85	4.69	1.09	7.50	7.24	0.017	11.22	11.21
CB-A1N	DMH-A2	13.0	0.089	5.300	0.48	5.93	0.61	7.60	7.24	0.028	11.22	11.21
DMH-A2	DMH-A1	23.0	1.642	4.574	7.57	14.92	2.41	6.82	6.52	0.004	11.19	11.18
DMH-A1	DMH-8	93.0	1.642	4.546	7.53	12.19	2.40	6.49	6.22	0.003	11.12	11.01
CB-8B	DMH-8	22.0	0.058	5.300	0.31	3.13	0.39	8.45	8.29	0.008	11.02	11.01
CB-8C	DMH-8	61.0	0.151	5.300	0.80	3.41	1.02	8.20	7.64	0.009	11.05	11.01
CB-8A	DMH-8	65.0	0.229	5.300	1.22	2.42	1.56	8.29	7.99	0.005	11.09	11.01
DMH-8	DMH-9	83.0	2.079	4.436	9.30	11.10	2.96	6.22	6.02	0.002	10.95	10.81
DMH-9	DMH-12	97.0	2.079	4.357	9.13	11.25	2.91	6.00	5.76	0.002	10.76	10.61
DMH-12	DMH-13	242.0	3.028	4.262	13.01	20.93	2.85	5.26	4.63	0.003	10.52	10.27
CB-C1N	DMH-C1	24.0	0.064	5.300	0.34	5.04	0.44	10.00	9.52	0.020	11.30	11.30
CB-C1SE	DMH-C1	17.0	0.065	5.300	0.30	4.98	0.38	10.00	9.67	0.019	11.30	11.30
CB-C2NE	DMH-C2	23.0	0.071	5.300	0.38	5.04	0.48	8.80	8.34	0.020	11.86	11.86
CB-C2SE	DMH-C2	13.0	0.073	5.300	0.39	5.04	0.50	8.90	8.64	0.020	11.86	11.86
DMH-C2	DMH-C1	77.0	1.629	5.165	8.49	10.50	4.80	7.83	6.98	0.010	11.80	11.30
DMH-C1	DMH-13	123.0	1.749	5.120	9.03	10.50	5.11	6.86	5.63	0.010	11.18	10.27
DMH-13	DMH-16	64.0	4.777	4.004	19.28	21.14	3.93	4.63	4.46	0.003	10.03	9.89
CB-14	DMH-16	49.0	0.081	5.300	0.43	3.60	3.09	9.21	8.71	0.010	9.89	9.89

CB-15	DMH-16	12.0	0.078	5.300	0.42	2.30	2.22	9.19	9.14	0.004	9.89	9.89
DMH-16	DMH-19	240.0	4.936	3.858	19.69	20.85	4.01	4.46	3.84	0.003	9.82	9.26
DMH-19	DMH-D1	42.0	5.217	3.788	19.92	33.91	2.82	3.34	3.23	0.003	9.20	9.16
DMH-D3	DMH-D2	46.0	1.260	5.300	6.84	7.74	3.87	6.52	6.27	0.005	10.64	10.44
CB-D2S	DMH-D2	29.0	0.214	5.300	1.14	3.17	2.95	7.00	6.77	0.008	10.56	10.44
DMH-D2	DMH-D1	104.0	1.808	5.266	9.60	11.52	6.09	6.77	4.52	0.012	10.26	9.16
DMH-D1	DMH-22	194.0	7.024	3.748	26.52	33.91	3.92	3.23	2.73	0.003	8.83	8.49
DMH-22	DMH-23	122.0	7.948	3.808	28.89	51.52	3.12	2.23	1.91	0.003	8.39	8.28
DMH-23	DMH-24	11.0	7.948	3.559	28.51	95.92	3.09	1.86	1.76	0.006	8.24	8.23
DMH-24	DMH-105	30.0	7.948	3.555	28.48	91.84	3.09	1.71	1.48	0.008	8.18	8.16
CB-30	DMH-31	47.0	0.320	5.300	1.71	3.52	2.18	7.41	6.95	0.010	9.11	9.00
CB-32O	DMH-32M	54.0	0.000	5.300	0.00	3.43	0.00	4.00	3.50	0.009	9.70	9.70
CB-32R	DMH-32P	37.0	0.898	5.300	2.06	3.31	2.63	7.64	7.32	0.009	10.04	9.92
CB-32Q	DMH-32P	22.0	0.288	5.300	1.54	2.94	1.98	7.48	7.33	0.007	9.96	9.92
DMH-32P	DMH-32M	53.0	1.266	5.260	6.71	10.99	3.80	3.02	2.44	0.011	9.92	9.70
CB-32N	DMH-32M	12.0	0.313	5.300	1.67	2.91	2.13	6.88	6.80	0.007	9.73	9.70
CB-F15	DMH-F13	17.0	0.146	5.300	0.78	5.04	0.99	7.10	6.76	0.020	11.06	11.05
CB-F14	DMH-F13	16.0	0.206	5.300	1.10	5.19	1.40	7.10	6.78	0.021	11.06	11.05
CB-F13	DMH-F12	10.0	0.151	5.300	0.81	5.04	1.03	9.30	8.10	0.020	11.45	11.44
CB-F12	DMH-F11	12.0	0.145	5.300	0.77	5.04	0.99	9.30	9.06	0.020	11.50	11.49
DMH-F11	DMH-F12	128.0	0.388	5.265	2.06	10.50	1.17	7.19	5.91	0.010	11.49	11.44
DMH-F12	DMH-F13	140.0	1.066	4.954	5.32	10.50	3.01	5.81	4.51	0.010	11.41	11.05
DMH-F13	DMH-32T	76.0	1.418	4.823	6.89	10.28	3.80	4.51	3.78	0.010	10.99	10.66
CB-32Z	DMH-32Y	31.0	0.000	5.300	0.00	2.58	5.37	3.86	3.70	0.005	11.40	10.96
DMH-32Y	DMH-32U	47.0	0.000	5.284	0.00	6.85	2.39	3.69	3.49	0.004	10.75	10.67
CB-32V	DMH-32U	27.0	0.255	5.300	1.36	3.22	1.74	6.59	6.37	0.008	10.71	10.67
CB-32W	DMH-32U	18.0	0.212	5.300	1.13	3.03	1.45	6.39	6.26	0.007	10.69	10.67
CB-32X	DMH-32U	38.0	0.217	5.300	1.16	3.32	1.47	6.29	5.98	0.009	10.71	10.67
DMH-32U	DMH-32T	119.0	1.063	5.227	5.71	6.88	6.62	3.39	2.86	0.004	11.72	10.66
DMH-32T	DMH-32S	171.0	2.501	4.767	12.02	21.96	3.31	2.78	2.29	0.003	10.47	10.20
DMH-32S	DMH-32M	277.0	2.501	4.621	11.65	22.45	3.23	2.27	1.44	0.003	10.12	9.70
DMH-32M	DMH-32L	24.0	4.081	4.376	18.01	22.15	4.53	1.42	1.35	0.003	9.67	9.50
DMH-32L	DMH-32K	9.0	4.081	4.363	17.85	43.23	4.52	1.30	1.20	0.011	9.40	9.37
DMH-32K	DMH-32	17.0	4.081	4.358	17.92	24.37	4.51	1.15	1.09	0.004	9.28	9.23
CB-34N	CB-34M	32.0	0.206	5.300	1.10	10.24	0.62	6.81	6.63	0.006	10.80	10.60
CB-34M	CB-34L	40.0	0.415	5.155	2.16	10.35	1.22	6.63	6.40	0.006	10.60	10.59
CB-34L	CB-34K	93.0	0.633	5.062	3.23	10.41	1.83	6.40	5.86	0.006	10.59	10.54
CB-34K	CB-34J	25.0	0.880	4.917	4.36	10.22	2.47	5.86	5.72	0.006	10.54	10.51
CB-34J	CB-34I	51.0	1.114	4.889	5.49	10.12	3.11	5.72	5.44	0.005	10.51	10.43
CB-34I	CB-34H	48.0	1.330	4.842	6.49	22.46	2.07	5.44	5.16	0.006	10.43	10.40
CB-34H	CB-34G	41.0	1.560	4.776	7.51	22.03	2.39	5.16	4.93	0.006	10.40	10.38
CB-34G	CB-34F	41.0	1.776	4.728	8.46	22.50	2.69	4.93	4.69	0.006	10.38	10.34
CB-34F	CB-34E	42.0	1.983	4.685	9.38	22.23	2.98	4.69	4.45	0.006	10.34	10.30
CB-34E	CB-34D	41.0	2.190	4.645	10.26	22.03	3.26	4.45	4.22	0.006	10.30	10.25
CB-34D	CB-34C	41.0	2.418	4.609	11.24	22.50	3.58	4.22	3.98	0.006	10.25	10.19
CB-34C	DMH-34A	18.0	2.641	4.577	12.16	19.61	3.88	3.98	3.90	0.004	10.19	10.16
CB-34B	DMH-34A	32.0	0.043	5.300	0.23	3.73	0.29	4.90	4.55	0.011	10.16	10.16
DMH-34A	DMH-34	67.0	2.693	4.584	12.34	23.12	3.93	3.90	3.20	0.010	10.01	9.81
CB-39D	CB-39C	70.0	0.152	5.300	0.81	3.56	1.03	6.00	5.30	0.010	9.55	9.51
CB-39C	DMH-39A	23.0	0.152	5.108	0.78	5.75	0.99	5.30	4.70	0.028	9.51	9.50
CB-39B	DMH-39A	16.0	0.258	5.300	1.38	3.56	1.75	5.11	4.95	0.010	9.52	9.50
DMH-39A	DMH-38	50.0	0.409	5.042	2.08	6.13	1.70	4.70	4.25	0.009	9.76	9.71
CB-38A	DMH-38	35.0	0.000	5.300	0.00	7.94	2.33	3.40	3.20	0.006	9.78	9.71
CB-40A	DMH-41	12.0	0.214	5.300	1.14	2.72	1.46	5.67	5.50	0.006	9.50	9.49
CB-43	DMH-44	26.0	0.181	5.300	0.88	1.56	1.09	6.16	6.11	0.002	9.66	9.65
CB-42	DMH-44	19.0	0.220	5.300	1.17	4.90	1.49	6.15	5.79	0.019	9.67	9.65
CB-45A	DMH-45	35.0	0.164	5.300	0.88	3.58	1.12	7.12	6.77	0.010	10.32	10.28
CB-45B	DMH-46A	45.0	0.146	5.300	0.78	2.19	1.43	7.75	7.30	0.010	11.12	11.06
CB-46E	DMH-46C	7.0	0.439	5.300	2.34	-2.50	6.72	10.60	10.90	-0.043	12.78	12.52
CB-46D	DMH-46C	40.0	0.185	5.300	1.04	-1.05	2.99	10.60	10.90	-0.098	12.81	12.52
CB-46H	DMH-46F	8.0	0.481	5.300	2.57	1.35	7.37	14.30	14.20	0.013	15.22	14.85
CB-46G	DMH-46F	39.0	0.138	5.300	0.74	-1.37	2.11	13.70	14.20	-0.013	14.94	14.79
CB-48M	CB-46L	58.0	0.111	5.300	0.59	1.23	3.49	16.00	16.00	0.010	16.86	16.51
CB-48L	DMH-46K	46.0	0.216	5.253	1.15	1.28	4.09	16.00	15.80	0.011	16.51	16.00
CB-48Q	DMH-46N	7.0	0.086	5.300	0.45	4.66	3.89	17.20	17.07	0.019	17.53	17.55
CB-48O	DMH-46N	23.0	0.099	5.300	0.53	1.38	3.69	17.37	17.07	0.013	17.71	17.55
CB-46P	DMH-46N	22.0	0.073	5.300	0.39	1.24	3.14	17.30	17.07	0.010	17.59	17.55
DMH-46N	DMH-46K	137.0	0.258	5.280	1.37	13.52	4.91	17.07	14.80	0.017	17.51	15.82
DMH-46K	DMH-46J	37.0	0.474	5.201	2.49	13.38	5.79	14.80	14.20	0.016	15.40	14.89
DMH-46J	DMH-46I	12.0	0.474	5.183	2.48	13.56	5.84	14.20	14.00	0.017	14.80	14.80
DMH-46I	DMH-46F	52.0	0.474	5.177	2.47	11.28	5.12	14.00	13.40	0.012	14.74	14.78
DMH-46F	DMH-46C	150.0	1.094	5.148	5.68	15.34	8.03	13.40	10.20	0.021	14.32	12.62
DMH-46C	DMH-46A	149.0	1.728	5.096	8.88	14.40	5.02	10.10	7.30	0.019	12.13	11.06
DMH-46A	DMH-45	78.0	1.674	5.011	9.47	12.47	5.36	7.30	6.20	0.014	10.93	10.29
CB-45B	DMH-45	8.0	0.169	5.300	0.90	3.31	2.59	6.80	6.20	0.075	10.34	10.29
CB-45C	DMH-45	33.0	0.188	5.300	1.01	-2.63	1.28	6.85	7.03	-0.005	10.32	10.29
DMH-45	DMH-44	182.0	2.396	4.970	12.00	23.36	3.82	6.20	4.26	0.011	10.16	9.65
DMH-44	DMH-41	186.0	2.776	4.835	13.53	46.13	1.91	4.16	3.27	0.005	9.57	9.49
CB-40	DMH-41	3.0	0.120	5.300	0.64	5.44	0.81	5.48	5.41	0.023	9.49	9.49
CB-39	DMH-41	39.0	0.284	5.300	1.41	3.37	1.80	5.23	4.89	0.009	9.55	9.49
DMH-41	DMH-38	60.0	3.374	4.580	15.51	58.08	1.61	3.22	3.02	0.003	9.72	9.71
DMH-38A(Partners)	DMH-38	123.0	6.562	5.300	35.08	55.92	3.64	3.40	3.02	0.003	9.86	9.71
DMH-38	DMH-37	431.0	10.345	4.454	46.45	74.52	4.02	3.02	1.85	0.003	10.63	10.00
CB-36	DMH-37	3.0	0.510	5.300	2.73	8.50	3.47	5.72	5.62	0.033	10.02	10.00
CB-35	DMH-37	36.0	0.438	5.300	2.34	3.51	2.98	5.80	5.45	0.010	10.16	10.00
DMH-37	DMH-34	101.0	11.294	4.151	47.25	74.25	4.09	1.84	1.57	0.003	9.94	9.81
DMH-34	DMH-33B	71.0	13.977	4.081	57.50	78.12	4.90	1.56	1.35	0.003	9.64	9.61
DMH-33B	DMH-33A	12.0	13.977	4.040	56.92	131.12	4.86	1.30	1.20	0.008	9.40	9.38
DMH-33A	DMH-32	24.0	13.977	4.033	56.82	77.57	4.85	1.15	1.08	0.003	9.27	9.23
CB-32D	DMH-32B	39.0	0.140	5.300	0.75	3.33	0.95	6.62	6.28	0.009	9.28	9.26
CB-32C	DMH-32B	21.0	0.134	5.300	0.72	3.21	0.91	6.90	6.73	0.008	9.27	9.26
CB-32I	DMH-32H	17.0	0.183	5.300	0.98	1.31	2.80	6.70	6.50	0.012	9.48	9.37
CB-32J	DMH-32H	48.0	0.171	5.300	0.91	1.23	2.61	6.40	5.90	0.010	9.65	9.37
DMH-32H	DMH-32E	119.0	0.353	5.248	1.87	22.14	0.60	6.90	4.76	0.010	9.31	9.30
CB-32G	DMH-32E	44.0	0.088	5.300	0.47	1.21	1.34	6.71	5.27	0.010	9	

DMH-28	DMH-2B	165.0	20.097	3.578	72.48	180.57	2.86	0.65	0.35	0.002	8.80	8.74
CB-27	DMH-25	158.0	20.587	3.614	72.92	178.27	2.87	0.35	0.07	0.002	8.70	8.64
CB-26	DMH-25	5.0	0.262	5.300	1.40	2.76	3.53	8.42	8.39	0.006	8.92	8.89
DMH-25	DMH-25	48.0	0.206	5.300	1.09	3.53	3.96	8.41	7.94	0.010	8.85	8.64
CB-24C	DMH-105	61.0	21.054	3.453	73.28	178.83	2.89	0.07	-0.04	0.002	8.18	8.16
CB-24G	DMH-24B	34.0	0.050	5.300	0.27	3.56	0.34	5.23	4.89	0.010	8.33	8.33
CB-24J	DMH-24E	41.0	0.072	5.300	0.38	4.98	0.49	5.90	5.10	0.020	8.45	8.44
CB-24K	DMH-24I	9.0	0.156	5.300	0.83	1.45	2.39	5.80	5.67	0.014	9.01	8.97
DMH-24I	DMH-24H	54.0	0.183	5.300	0.98	1.87	2.80	6.70	5.41	0.024	9.32	8.97
DMH-24H	DMH-24H	173.0	0.339	5.245	1.79	3.61	2.28	5.41	3.63	0.010	8.96	8.52
DMH-24H	DMH-24E	23.0	0.339	5.030	1.72	5.04	2.19	3.53	3.07	0.020	8.50	8.44
CB-24M	DMH-24L	16.0	0.456	5.300	2.44	6.50	3.10	3.10	2.50	0.033	8.68	8.79
CB-24P	DMH-24N	23.0	0.675	5.300	3.61	5.25	4.59	4.60	4.10	0.022	8.86	8.62
CB-24O	DMH-24N	21.0	0.548	5.300	2.93	7.38	3.73	5.00	4.10	0.043	8.76	8.62
CB-24Q	DMH-24N	154.0	0.071	5.300	0.38	3.63	0.48	5.80	4.00	0.010	8.84	8.62
CB-24S	DMH-24R	26.0	0.171	5.300	0.91	4.42	1.16	6.60	6.20	0.015	9.39	9.37
CB-24T	DMH-24R	11.0	0.775	5.300	4.14	-11.77	5.27	5.40	6.60	-0.109	9.52	9.37
CB-24U	DMH-24R	116.0	0.161	5.300	0.66	2.96	1.09	7.10	6.30	0.007	9.44	9.37
DMH-24R	DMH-24N	300.0	1.106	4.999	5.67	8.58	3.15	6.10	4.10	0.007	9.47	8.62
DMH-24N	DMH-24L	294.0	2.400	4.394	10.63	16.16	3.38	4.00	2.50	0.005	9.44	8.79
DMH-24L	DMH-24E	80.0	2.856	4.148	11.94	14.96	3.80	2.50	2.15	0.004	8.67	8.44
CB-24F	DMH-24E	15.0	0.136	5.300	0.73	3.05	0.93	5.73	5.62	0.007	8.45	8.44
DMH-24E	DMH-24B	37.0	3.403	4.089	14.02	75.96	1.98	1.35	0.87	0.013	8.34	8.33
CB-24D	DMH-24B	35.0	0.121	5.300	0.65	1.51	1.85	6.65	6.10	0.016	8.43	8.33
DMH-24B	DMH-24A	47.0	3.574	4.036	14.64	63.05	2.05	0.87	0.45	0.009	8.29	8.27
DMH-24A	DMH-105	199.0	3.574	3.971	14.31	25.90	2.02	0.30	0.00	0.002	8.25	8.16
DMH-105	MH-88	43.0	32.577	3.429	112.61	266.27	4.32	-0.04	-0.21	0.004	8.05	8.01
MH-88	DMH-107	222.0	32.825	3.418	113.45	258.84	4.35	-0.21	-1.04	0.004	7.89	7.70
DMH-107	DMH-F10	172.0	34.723	3.362	117.66	258.30	4.50	-1.04	-1.67	0.004	7.61	7.46
DMH-F10	DMH-F9	374.0	42.812	3.319	143.24	267.30	5.43	-1.67	-3.16	0.004	7.17	6.68
CB-G12SE	DMH-G12	13.0	0.075	5.300	0.40	5.13	3.90	8.00	7.73	0.021	8.26	7.92
CB-G13SE	DMH-G13	13.0	0.107	5.300	0.57	5.04	4.25	7.50	7.24	0.020	8.08	8.09
DMH-63B	DMH-G14	23.0	1.193	3.800	4.33	2.97	7.94	4.75	4.50	0.011	9.87	9.34
CB-G15SE	DMH-G15	13.0	0.082	5.300	0.44	5.04	0.66	7.70	7.44	0.020	9.35	9.35
MH-74	DMH-G15	10.0	0.037	5.300	0.20	4.83	0.25	4.90	4.80	0.010	9.35	9.35
DMH-G15	DMH-G14	24.0	0.122	5.188	0.64	9.83	0.36	4.71	4.50	0.009	9.34	9.34
CB-G14SW	DMH-G14	17.0	0.082	5.300	0.33	5.11	0.42	7.80	7.45	0.021	9.34	9.34
DMH-G14	DMH-G13	167.0	1.714	3.597	6.21	9.34	3.52	4.50	3.18	0.008	8.67	8.09
CB-G13SW	DMH-G13	13.0	0.103	5.300	0.55	4.84	4.09	7.50	7.26	0.018	8.08	8.09
DMH-G13	DMH-G12	149.0	2.364	3.544	8.44	20.13	2.69	2.68	1.50	0.008	8.02	7.82
CB-G12SW	DMH-G12	13.0	0.045	5.300	0.24	5.13	3.35	8.00	7.73	0.021	8.20	7.88
DMH-G12	DMH-G11	47.0	2.590	3.482	9.09	20.34	2.69	1.50	1.12	0.008	7.21	7.14
CB-E6SW	DMH-E6	9.0	0.247	5.300	1.32	3.56	4.20	8.81	8.52	0.010	9.10	8.95
CB-E6NW	DMH-E6	26.0	0.247	5.300	1.32	3.56	4.20	8.78	8.52	0.010	9.27	8.94
CB-E3SW	DMH-E3	12.0	0.156	5.300	0.83	3.56	1.06	9.10	8.95	0.010	10.12	10.11
CB-E3NW	DMH-E3	26.0	0.151	5.300	0.81	3.63	3.72	10.19	9.92	0.010	10.57	10.24
DMH-E3	DMH-E4	140.0	0.307	5.268	1.83	10.50	0.92	8.09	6.69	0.010	9.66	9.63
CB-E4NW	DMH-E4	28.0	0.134	5.300	0.71	4.99	4.51	9.60	8.99	0.020	9.85	9.63
CB-E4SW	DMH-E4	9.0	0.176	5.300	0.94	5.18	5.01	9.50	9.31	0.021	9.91	9.62
DMH-E4	DMH-E5	122.0	0.617	4.838	3.01	10.50	1.70	6.69	5.47	0.010	9.50	9.39
DMH-E10	DMH-E5	35.0	0.480	5.300	2.62	22.82	0.83	5.33	4.97	0.010	9.39	9.39
CB-E6NE	DMH-E8	10.0	0.075	5.300	0.40	5.04	0.51	8.80	8.70	0.020	10.44	10.44
DMH-E8	DMH-E9	114.0	0.695	5.244	3.67	6.46	2.89	8.45	7.31	0.010	10.41	10.04
CB-E9NE	DMH-E9	10.0	0.097	5.300	0.52	5.04	0.68	8.90	8.70	0.020	10.04	10.04
DMH-E9	DMH-E5	118.0	1.390	5.136	7.20	10.50	4.07	7.06	5.88	0.010	9.98	9.39
DMH-E5	DMH-E6	104.0	2.819	4.635	13.17	22.62	4.19	4.97	3.93	0.010	9.15	8.72
DMH-E6	DMH-E7	56.0	3.313	4.565	15.25	22.82	4.85	3.93	3.37	0.010	7.89	7.58
DMH-E7	DMH-G11	41.0	3.313	4.632	15.14	31.99	4.82	2.28	1.46	0.020	7.36	7.14
DMH-G11	DMH-G10	10.0	5.921	3.464	20.68	66.13	4.21	0.62	0.36	0.026	6.85	6.82
DMH-G10	DMH-G9	18.0	5.921	3.462	20.68	41.01	4.21	0.38	0.18	0.010	6.72	6.68
DMH-G9	MH-75	128.0	49.794	1.662	83.40	0.00	3.60	-12.15	-12.15	0.000	6.68	6.44
MH-75	DMH-110	82.0	49.794	1.645	82.56	405.01	3.57	-3.16	-3.91	0.009	6.25	6.10
DMH-110	DMH-111	211.0	49.794	1.634	82.02	280.76	3.55	-3.91	-4.71	0.004	5.88	5.50
DMH-111	O-1	67.0	49.794	1.606	80.81	258.68	3.50	-4.71	-4.98	0.004	5.32	5.20
CB-2	DMH-3	20.0	0.223	5.300	1.19	3.90	4.36	7.72	7.48	0.012	8.18	7.68
CB-1	DMH-3	72.0	0.203	5.300	1.09	3.09	3.58	7.55	7.01	0.008	7.99	7.79
DMH-3	DMH-4	57.0	0.428	5.243	2.25	10.13	4.81	6.91	6.38	0.009	7.48	7.05
DMH-4	O-2	218.0	0.428	5.208	2.24	10.98	4.88	6.38	4.00	0.011	6.94	4.85

C:\Users\mathews\Documents\0851605 AmPUD 2014-May.sic

Scenario: 25-year with tailwater
 Current Time Step: 0.000Hr
 Conduit FlexTable: Combined Pipe/Node Report

Start Node	Stop Node	Length (Unified) (ft)	System CA (acres)	System Intensity (in/in)	System Rational Flow (ft ³ /s)	Capacity (Full Flow) (ft ³ /s)	Velocity (Average) (ft/s)	Invert (Upstream) (ft)	Invert (Downstream) (ft)	Slope (ft/ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
CB-G6N	DMH-G6	14.0	0.118	6.000	0.71	5.04	0.91	7.50	7.22	0.020	10.16	10.15
CB-G4E	DMH-G4	9.0	0.273	6.000	1.85	5.04	2.10	7.00	6.82	0.020	10.17	10.15
DCB-G2E	DMH-G2	12.0	0.232	6.000	1.40	5.14	1.78	5.00	4.76	0.021	9.52	9.50
CB-G1E	DMH-G1	43.0	0.179	6.000	1.08	3.58	1.38	4.00	3.57	0.010	9.44	9.40
CB-G1NE	DMH-G1	58.0	0.098	6.000	0.59	3.58	0.76	4.00	3.44	0.010	9.42	9.40
DMH-G1	DMH-G2	45.0	0.277	6.778	1.61	77.20	0.13	2.90	2.77	0.003	9.50	9.50
DMH-G2	DMH-G3	42.0	0.509	4.726	2.42	79.91	0.19	2.77	2.64	0.003	10.15	10.15
DMH-G3	DMH-G4	155.0	0.509	4.144	2.13	79.09	0.17	2.64	2.17	0.003	10.15	10.15
DMH-G4	DMH-G5	203.0	0.782	2.971	2.34	62.14	0.19	2.17	1.79	0.002	10.15	10.15
RG-G1	DMH-G5	65.0	0.000	6.000	0.00	8.43	7.08	5.32	4.29	0.016	11.34	10.16
DMH-G5	DMH-G6	118.0	0.782	2.426	1.91	137.41	0.84	1.79	0.71	0.009	10.15	10.14
DMH-G6	DMH-G7	38.0	1.015	2.356	2.41	80.72	0.68	-0.73	-0.85	0.003	10.14	10.14
DMH-G7	DMH-G8	11.0	1.015	2.334	2.39	212.16	0.88	-0.85	-1.09	0.022	9.53	9.53
DMH-G8	DMH-G9	70.0	1.015	2.328	2.38	78.67	0.88	-1.09	-1.30	0.003	9.53	9.52
CB-F7NE	DMH-F7	12.0	0.219	6.000	1.32	5.24	1.69	9.00	8.74	0.022	10.65	10.63
CB-F7NW	DMH-F7	13.0	0.000	6.000	0.00	5.04	0.00	9.00	8.74	0.020	10.64	10.64
CB-F8NE	DMH-F8	12.0	0.195	6.000	1.18	5.24	1.50	9.00	8.74	0.022	11.17	11.16
CB-F8NW	DMH-F8	13.0	0.000	6.000	0.00	5.04	0.00	9.00	8.74	0.020	11.17	11.17
CB-F8NW	DMH-F5	13.0	0.000	6.000	0.00	5.04	0.00	9.00	8.74	0.020	11.59	11.59
CB-F5NE	DMH-F5	13.0	0.212	6.000	1.28	5.04	1.63	9.00	8.74	0.020	11.60	11.58
CB-F4NW	DMH-F4	13.0	0.121	6.000	0.73	3.58	0.93	9.00	8.87	0.010	11.76	11.76
CB-F4NE	DMH-F4	12.0	0.123	6.000	0.74	3.71	0.94	9.00	8.87	0.011	11.76	11.75
CB-F3NE	DMH-F3	10.0	0.240	6.000	1.45	5.04	1.85	8.50	8.30	0.020	12.48	12.46
CB-F1NE	DMH-F1	9.0	0.083	6.000	0.50	3.76	0.84	9.90	9.80	0.011	12.66	12.68
DMH-F1	DMH-F2	78.0	0.514	5.958	3.08	6.83	1.76	8.30	7.97	0.004	12.51	12.44
DCB-F2E	DMH-F2	77.0	0.404	6.000	2.44	5.10	1.99	8.70	8.22	0.006	12.60	12.49
DMH-F2	DMH-F3	36.0	0.917	6.824	5.38	12.50	1.71	7.47	7.36	0.003	12.42	12.40
DMH-F3	DMH-C5	129.0	1.157	5.761	6.72	12.44	2.14	7.36	6.97	0.003	12.39	12.28
CB-C4SW	DMH-C4	12.0	0.075	6.000	0.46	5.04	0.58	9.10	8.86	0.020	12.41	12.40
CB-C4NW	DMH-C4	12.0	0.060	6.000	0.30	5.04	0.39	9.10	8.86	0.020	12.41	12.41
CB-C3SW	DMH-C3	12.0	0.028	6.000	0.17	11.12	0.22	9.80	8.43	0.098	12.32	12.32
CB-C3NW	DMH-C3	12.0	0.025	6.000	0.15	11.12	0.19	9.80	8.43	0.098	12.32	12.32
DMH-C3	DMH-C4	40.0	0.141	5.812	0.83	10.37	0.47	8.43	8.04	0.010	12.32	12.32
DMH-C4	DMH-C5	57.0	0.733	5.556	4.10	10.50	2.32	8.04	7.47	0.010	12.30	12.21
DMH-C5	DMH-C6	33.0	1.890	5.483	10.45	12.45	3.33	6.97	5.87	0.003	12.15	12.08
CB-C7SE	DMH-C7	14.0	0.106	6.000	0.64	5.04	0.81	9.20	8.92	0.020	12.68	12.67
CB-C7NE	DMH-C7	14.0	0.117	6.000	0.71	5.13	0.90	9.20	8.91	0.021	12.68	12.68
CB-C8SE	DMH-C8	14.0	0.146	6.000	0.88	5.04	1.12	10.70	10.42	0.020	13.61	13.60
CB-C8NE	DMH-C8	14.0	0.092	6.000	0.50	5.04	0.63	10.70	10.42	0.020	13.60	13.60
DMH-C8	DMH-C7	178.0	1.588	5.934	9.58	6.82	5.41	8.61	7.76	0.004	13.93	12.46
DMH-C7	DMH-C6	92.0	2.175	5.835	12.79	14.73	4.07	7.26	6.87	0.004	12.41	12.12
DMH-C6	DMH-F4	116.0	4.183	5.453	22.99	22.85	4.68	6.37	6.01	0.003	11.93	11.57
DMH-F4	DMH-F5	122.0	4.769	5.379	25.97	34.16	3.67	5.81	5.19	0.003	11.55	11.36
DMH-F5	DMH-D5	108.0	5.332	5.279	28.37	38.51	4.01	5.19	4.83	0.003	11.34	11.14
CB-D4NW	DMH-D4	12.0	0.112	6.000	0.68	3.58	0.86	10.30	10.18	0.010	11.73	11.73
CB-D4SW	DMH-D4	13.0	0.117	6.000	0.71	3.42	0.90	10.30	10.18	0.009	11.73	11.73
DMH-D4	DMH-D5	90.0	0.452	5.957	2.71	10.50	1.54	8.34	7.44	0.010	11.69	11.63
DCB-D6S	DMH-D6	12.0	0.434	6.000	2.62	5.04	4.73	8.80	8.56	0.020	13.23	13.10
CB-D7E	DMH-D7	54.0	0.133	6.000	0.81	5.18	1.03	8.83	7.69	0.021	13.43	13.40
DMH-D7	DMH-D8	63.0	0.995	5.842	5.86	7.90	3.31	7.69	7.39	0.006	13.26	13.10
DMH-D6	DMH-D5	179.0	1.428	5.794	8.34	8.08	5.34	7.39	6.33	0.006	13.07	11.83
DMH-D5	DMH-F6	123.0	7.212	5.198	37.70	38.59	5.50	4.83	4.48	0.003	11.09	10.67
DMH-F6	DMH-F7	122.0	7.870	5.131	40.71	38.73	5.91	4.46	4.09	0.003	10.82	10.14
DMH-F7	DMH-F8	23.0	8.089	5.089	41.33	43.98	6.00	4.09	3.99	0.004	10.08	9.99
DMH-F8	DMH-F9	10.0	8.089	5.058	41.24	94.32	5.99	3.99	3.79	0.020	9.17	9.13
DMH-F9	DMH-F10	79.0	8.089	5.053	41.20	36.76	5.98	3.79	3.55	0.003	9.07	8.75
CB-E2SE	DMH-E2	8.0	0.195	6.000	1.18	5.19	1.50	7.80	7.63	0.021	9.43	9.42
CB-E2NE	DMH-E2	49.0	0.154	6.000	0.93	3.58	1.18	7.80	7.31	0.010	9.44	9.41
DMH-E2	DMH-E1	33.0	0.348	5.876	2.06	3.58	2.63	7.31	6.98	0.010	9.33	9.22
DMH-E1	DMH-E8	9.0	0.348	5.838	2.05	3.58	2.61	5.66	5.48	0.009	9.07	9.04
CB-21	DMH-22	5.0	0.496	6.000	3.00	4.51	3.82	6.82	6.74	0.016	10.17	10.14
CB-20	DMH-22	49.0	0.428	6.000	2.58	3.53	3.30	6.82	6.34	0.010	10.47	10.21
CB-18	DMH-19	6.0	0.140	6.000	0.85	5.44	1.08	8.74	8.60	0.023	10.70	10.69
CB-17	DMH-19	49.0	0.141	6.000	0.85	3.60	1.08	8.74	8.24	0.010	10.82	10.79
CB-11	DMH-12	5.0	0.630	6.000	3.20	3.90	4.08	8.65	6.60	0.012	10.95	10.92
CB-10	DMH-12	49.0	0.419	6.000	2.53	3.56	3.23	8.65	8.17	0.010	11.17	10.92
CB-A6SE	DMH-A6	14.0	0.367	6.000	2.22	3.66	2.82	8.08	7.94	0.010	11.45	11.40
CB-A6N	DMH-A6	15.0	0.169	6.000	1.02	3.56	1.30	8.09	7.94	0.010	11.41	11.40
DMH-A6	DMH-A5	93.0	0.777	5.865	4.67	5.76	2.64	7.94	7.68	0.003	12.40	12.22
DMH-A5	DMH-A4	126.0	0.777	5.660	4.59	5.77	2.60	7.66	7.28	0.003	12.16	11.92
CB-A4S	DMH-A4	14.0	0.041	6.000	0.25	5.04	0.32	10.00	9.72	0.020	11.94	11.94
CB-A4N	DMH-A4	14.0	0.053	6.000	0.32	5.13	0.41	10.00	9.71	0.021	11.95	11.95
DMH-A4	DMH-A3	178.0	0.871	5.714	5.02	12.34	1.60	7.28	6.76	0.003	11.91	11.82
DMH-A3	DMH-A2	42.0	1.380	5.380	7.38	12.59	2.35	6.76	6.62	0.003	11.74	11.70
CB-A1S	DMH-A2	15.0	0.159	6.000	0.96	4.69	1.22	7.60	7.24	0.017	11.71	11.70
CB-A1N	DMH-A2	13.0	0.089	6.000	0.54	5.93	0.89	7.60	7.24	0.028	11.70	11.70
DMH-A2	DMH-A1	23.0	1.642	5.326	8.82	14.92	2.81	6.62	6.52	0.004	11.83	11.80
DMH-A1	DMH-8	93.0	1.642	5.302	8.78	12.19	2.79	6.49	6.22	0.003	11.78	11.64
CB-8B	DMH-8	22.0	0.058	6.000	0.35	3.13	0.44	8.45	8.28	0.008	11.59	11.58
CB-8C	DMH-8	61.0	0.151	6.000	0.91	3.41	1.16	8.20	7.84	0.009	11.68	11.64
CB-8A	DMH-8	65.0	0.229	6.000	1.38	2.42	1.76	8.29	7.99	0.005	11.88	11.59
DMH-8	DMH-9	83.0	2.079	5.202	10.90	11.10	3.47	6.22	6.02	0.002	11.39	11.19
DMH-9	DMH-12	97.0	2.079	5.130	10.75	11.25	3.42	6.00	5.78	0.002	11.14	10.92
DMH-12	DMH-13	242.0	3.028	5.045	15.40	20.93	3.14	5.28	4.63	0.003	12.08	11.74
CB-C1N	DMH-C1	24.0	0.064	6.000	0.39	5.04	0.49	10.00	9.62	0.020	13.30	13.30
CB-C1SE	DMH-C1	17.0	0.056	6.000	0.34	4.86	0.43	10.00	9.67	0.019	13.30	13.30
CB-C2NE	DMH-C2	23.0	0.071	6.000	0.43	5.04	0.55	8.80	8.34	0.020	13.20	13.20
CB-C2SE	DMH-C2	13.0	0.073	6.000	0.44	5.04	0.57	8.90	8.64	0.020	13.20	13.20
DMH-C2	DMH-C1	77.0	1.629	5.874	9.65	10.50	5.46	7.83	6.66	0.010	13.85	13.30
DMH-C1	DMH-13	123.0	1.749	5.832	10.28	10.50	5.82	6.86	5.63	0.010	13.35	12.17
DMH-13	DMH-16	64.0	4.777	4.814	23.18	21.14	4.72	4.63	4.46	0.003	11.67	11.47
CB-14	DMH-16	49.0	0.081	6.000	0.49	3.60	0.62	9.21	8.71	0.010	11.92	11.92

CB-15	DMH-16	12.0	0.078	6.000	0.47	2.30	0.80	9.19	9.14	0.004	11.80	11.80
DMH-16	DMH-19	240.0	4.936	4.773	23.75	20.85	4.84	4.46	3.84	0.003	11.40	10.69
DMH-19	DMH-D1	42.0	5.217	4.624	24.32	33.91	3.44	3.34	3.23	0.003	10.57	10.61
DMH-D3	DMH-D2	46.0	1.280	6.000	7.74	7.74	4.38	6.52	6.27	0.005	12.05	11.80
CB-D2S	DMH-D2	29.0	0.214	6.000	1.30	3.17	3.46	7.00	6.77	0.008	11.97	11.80
DMH-D2	DMH-D1	104.0	1.808	5.988	10.88	11.52	6.96	5.77	4.52	0.012	12.33	10.91
DMH-D1	DMH-22	194.0	7.024	4.588	32.48	33.91	4.80	3.23	2.73	0.003	10.47	9.96
DMH-22	DMH-23	122.0	7.948	4.466	35.78	51.52	3.87	2.23	1.91	0.003	9.94	9.77
DMH-23	DMH-24	11.0	7.948	4.372	35.02	95.92	3.79	1.88	1.78	0.009	9.26	9.25
DMH-24	DMH-105	30.0	7.948	4.363	34.98	91.84	3.78	1.71	1.46	0.008	9.22	9.18
CB-30	DMH-31	47.0	0.320	6.000	1.84	3.62	2.47	7.41	6.95	0.010	9.59	9.45
CB-32O	DMH-32M	54.0	0.000	6.000	0.00	3.43	0.00	4.00	3.50	0.009	11.09	11.09
CB-32R	DMH-32P	37.0	0.386	6.000	2.34	3.31	2.97	7.64	7.32	0.009	11.85	11.69
CB-32Q	DMH-32P	22.0	0.288	6.000	1.74	2.94	2.22	7.48	7.33	0.007	11.71	11.66
DMH-32P	DMH-32M	53.0	1.266	5.963	7.81	10.99	4.31	3.02	2.44	0.011	11.37	11.09
CB-32N	DMH-32M	12.0	0.313	6.000	1.89	2.91	2.41	6.88	6.80	0.007	11.12	11.09
CB-F15	DMH-F13	17.0	0.148	6.000	0.88	5.04	1.12	7.10	6.76	0.020	11.31	11.30
CB-F14	DMH-F13	16.0	0.206	6.000	1.25	5.19	1.69	7.10	6.76	0.021	11.32	11.30
CB-F13	DMH-F12	10.0	0.000	6.000	0.00	5.04	0.00	9.30	9.10	0.020	12.12	12.12
CB-F12	DMH-F11	12.0	0.145	6.000	0.88	5.04	1.12	9.30	9.06	0.020	11.64	11.63
DMH-F11	DMH-F12	128.0	0.145	5.988	0.87	10.50	0.49	7.19	5.91	0.010	11.63	11.62
DMH-F12	DMH-F13	140.0	0.915	5.189	8.79	10.50	2.71	5.91	4.51	0.010	11.59	11.30
DMH-F13	DMH-32T	76.0	1.267	5.034	8.43	10.29	3.84	4.51	3.78	0.010	11.67	11.39
CB-32Z	DMH-32Y	31.0	0.000	6.000	0.00	2.56	5.87	3.88	3.70	0.005	11.62	11.10
DMH-32Y	DMH-32U	47.0	0.000	5.984	0.00	6.86	2.81	3.69	3.49	0.004	10.76	10.67
CB-32V	DMH-32U	27.0	0.255	6.000	1.54	3.22	1.97	6.59	6.37	0.008	10.72	10.67
CB-32W	DMH-32U	18.0	0.212	6.000	1.28	3.03	1.64	6.39	6.26	0.007	10.69	10.67
CB-32X	DMH-32U	38.0	0.217	6.000	1.31	3.32	1.67	6.29	5.96	0.009	10.72	10.67
DMH-32U	DMH-32T	119.0	1.083	5.930	6.47	6.88	6.27	3.39	2.88	0.004	12.62	11.29
DMH-32T	DMH-32S	171.0	2.350	4.971	11.78	21.96	3.34	2.78	2.29	0.003	11.11	10.84
DMH-32S	DMH-32M	277.0	2.350	4.818	11.41	22.45	3.26	2.27	1.44	0.003	10.66	10.24
DMH-32M	DMH-32K	24.0	3.930	4.547	18.07	22.15	4.62	1.42	1.35	0.003	10.04	9.97
DMH-32L	DMH-32K	9.0	3.930	4.547	18.01	43.23	4.61	1.30	1.20	0.011	9.55	9.52
DMH-32K	DMH-32	17.0	3.930	4.542	17.99	24.37	4.60	1.15	1.09	0.004	9.46	9.40
CB-34N	CB-34M	32.0	0.206	6.000	1.26	10.24	0.71	6.81	6.63	0.006	10.76	10.75
CB-34M	CB-34L	40.0	0.415	5.864	2.45	10.35	1.39	6.63	6.40	0.006	10.75	10.74
CB-34L	CB-34K	93.0	0.633	5.777	3.69	10.41	2.09	6.40	5.86	0.006	10.74	10.67
CB-34K	CB-34J	25.0	0.880	5.844	5.01	10.22	2.83	5.86	5.72	0.006	10.67	10.64
CB-34J	CB-34I	61.0	1.114	5.817	6.31	10.12	3.67	5.72	5.44	0.005	10.64	10.53
CB-34I	CB-34H	48.0	1.330	5.574	7.47	22.46	2.38	5.44	5.16	0.006	10.53	10.50
CB-34H	CB-34G	41.0	1.560	5.514	8.67	22.03	2.76	5.16	4.93	0.006	10.54	10.50
CB-34G	CB-34F	41.0	1.778	5.469	9.79	22.60	3.12	4.93	4.69	0.006	10.95	10.91
CB-34F	CB-34E	42.0	1.983	5.430	10.85	22.23	3.45	4.69	4.45	0.006	10.91	10.85
CB-34E	CB-34D	41.0	2.190	5.393	11.81	22.03	3.79	4.45	4.22	0.006	10.85	10.78
CB-34D	CB-34C	41.0	2.418	5.361	13.07	22.50	4.16	4.22	3.98	0.006	10.78	10.70
CB-34C	DMH-34A	18.0	2.641	5.331	14.19	19.61	4.52	3.98	3.90	0.004	10.71	10.67
CB-34B	DMH-34A	32.0	0.043	6.000	0.26	3.73	0.33	4.90	4.55	0.011	10.67	10.67
DMH-34A	DMH-34	67.0	2.683	5.319	14.39	23.12	4.58	3.80	3.20	0.010	10.83	10.66
CB-39D	CB-39C	70.0	0.152	6.000	0.92	3.56	1.17	6.00	5.30	0.010	9.58	9.51
CB-39C	DMH-39A	23.0	0.152	5.820	0.89	5.76	1.13	5.30	4.70	0.026	9.51	9.50
CB-39B	DMH-39A	16.0	0.258	6.000	1.56	3.56	1.98	5.11	4.95	0.010	9.53	9.50
DMH-39A	DMH-38	50.0	0.403	5.759	2.38	6.13	1.94	4.70	4.25	0.009	9.78	9.71
CB-38A	DMH-38	35.0	0.000	4.030	0.00	7.94	8.65	3.40	3.20	0.006	10.45	9.71
CB-40A	DMH-41	12.0	0.214	6.000	1.30	2.72	1.65	5.67	5.50	0.006	9.51	9.49
CB-43	DMH-44	26.0	0.124	6.000	0.75	1.66	0.95	6.16	6.11	0.002	9.65	9.64
CB-42	DMH-44	19.0	0.220	6.000	1.33	4.90	1.09	6.15	5.79	0.019	9.69	9.67
CB-45A	DMH-45	35.0	0.185	6.000	1.12	3.66	1.43	7.12	6.77	0.010	10.67	10.64
CB-46B	DMH-46A	45.0	0.146	6.000	0.88	2.19	1.62	7.75	7.30	0.010	11.38	11.31
CB-46E	DMH-46C	7.0	0.439	6.000	2.65	-2.60	7.60	10.80	10.90	-0.045	13.52	13.19
CB-46D	DMH-46C	40.0	0.168	6.000	1.01	-1.05	2.90	10.60	10.90	-0.008	13.46	13.18
CB-46H	DMH-46F	8.0	0.481	6.000	2.91	1.35	8.34	14.30	14.20	0.013	15.33	14.86
CB-46G	DMH-46F	39.0	0.138	6.000	0.84	-1.37	2.39	13.70	14.20	-0.013	14.92	14.65
CB-46M	CB-46L	58.0	0.111	6.000	0.67	1.23	3.60	16.80	16.00	0.010	16.99	16.57
CB-46L	DMH-46K	46.0	0.216	5.952	1.30	1.26	4.10	16.00	15.50	0.011	16.57	16.04
CB-46Q	DMH-46N	7.0	0.088	6.000	0.62	4.88	4.03	17.20	17.07	0.019	17.53	17.57
CB-46O	DMH-46N	23.0	0.099	6.000	0.60	1.38	3.82	17.37	17.07	0.013	17.73	17.56
CB-46P	DMH-46N	22.0	0.073	6.000	0.44	1.24	3.24	17.30	17.07	0.010	17.61	17.56
DMH-46N	DMH-46K	137.0	0.268	5.980	1.55	13.52	6.09	17.07	14.80	0.017	17.54	15.47
DMH-46K	DMH-46J	37.0	0.474	5.899	2.62	13.38	6.00	14.80	14.20	0.016	15.44	14.94
DMH-46J	DMH-46I	12.0	0.474	5.880	2.81	13.55	6.05	14.20	14.00	0.017	14.84	14.73
DMH-46I	DMH-46F	52.0	0.474	5.875	2.81	11.28	5.30	14.00	13.40	0.012	14.64	14.43
DMH-46F	DMH-46C	150.0	1.094	5.845	6.44	15.34	8.30	13.40	10.20	0.021	14.38	12.77
DMH-46C	DMH-46A	149.0	1.700	5.791	9.92	14.40	5.62	10.10	7.30	0.019	12.65	11.33
DMH-46A	DMH-45	78.0	1.846	5.711	10.63	12.47	6.01	7.30	6.20	0.014	11.16	10.37
CB-45B	DMH-45	8.0	0.169	6.000	1.02	3.31	2.93	6.80	6.20	0.075	10.44	10.38
CB-45C	DMH-45	33.0	0.188	6.000	1.14	-2.63	1.45	6.85	7.03	-0.005	10.67	10.64
DMH-45	DMH-44	182.0	2.389	5.672	13.66	23.38	4.35	6.20	4.26	0.011	10.29	9.83
DMH-44	DMH-41	188.0	2.732	5.547	15.28	46.13	2.16	4.16	3.27	0.005	9.59	9.49
CB-40	DMH-41	3.0	0.120	6.000	0.72	5.44	0.92	5.48	5.41	0.023	9.49	9.49
CB-39	DMH-41	38.0	0.284	6.000	1.60	3.37	2.04	5.23	4.89	0.009	9.57	9.49
DMH-41	DMH-38	60.0	3.330	5.289	17.75	58.08	1.85	3.22	3.02	0.003	8.73	9.71
DMH-38A(Partners)	DMH-38	123.0	6.582	6.000	39.69	55.92	4.12	3.40	3.02	0.003	9.90	9.71
DMH-38	DMH-37	431.0	10.302	4.024	41.79	74.52	4.64	3.02	1.66	0.003	10.68	10.00
CB-36	DMH-37	3.0	0.510	6.000	3.09	6.50	3.93	5.72	5.62	0.033	10.02	10.00
CB-35	DMH-37	36.0	0.438	6.000	2.65	3.51	3.38	5.80	5.45	0.010	10.20	10.00
DMH-37	DMH-34	101.0	11.250	3.898	44.20	74.26	4.73	1.84	1.67	0.003	10.48	10.30
DMH-34	DMH-33B	71.0	13.934	3.899	64.35	78.12	5.64	1.66	1.35	0.003	10.23	10.07
DMH-33B	DMH-33A	12.0	13.934	3.852	54.11	131.12	5.52	1.30	1.20	0.008	9.56	9.53
DMH-33A	DMH-32	24.0	13.934	3.850	64.07	77.57	5.52	1.15	1.08	0.003	9.49	9.43
CB-32D	DMH-32B	39.0	0.140	6.000	0.85	3.33	1.08	6.62	6.28	0.009	9.79	9.77
CB-32C	DMH-32B	21.0	0.134	6.000	0.81	3.21	1.03	6.90	6.73	0.008	9.74	9.73
CB-32I	DMH-32H	17.0	0.183	6.000	1.11	1.31	3.17	6.70	6.50	0.012	9.67	9.53
CB-32J	DMH-32H	48.0	0.171	6.000	1.03	1.23	2.96	6.40	6.90	0.010	9.88	9.53
DMH-32H	DMH-32E	119.0	0.353	5.951	2.12	22.14	0.67	5.90	4.76	0.010	9.52	9.51
CB-32G	DMH-32E	44.0	0.088	6.000	0.53	1.21	1.52	5				

DMH-28	DMH-28	165.0	19.902	3.745	75.13	180.57	3.38	0.85	0.35	0.002	9.21	9.12
CB-27	DMH-25	158.0	20.393	3.690	75.84	178.27	3.38	0.35	0.07	0.002	9.11	9.03
CB-26	DMH-25	5.0	0.282	6.000	1.59	2.76	3.84	8.42	8.39	0.008	9.19	9.18
DMH-25	DMH-25	48.0	0.205	6.000	1.24	3.53	4.09	8.41	7.94	0.010	9.22	9.18
CB-24C	DMH-105	61.0	20.880	3.617	76.05	179.83	3.39	0.07	-0.04	0.002	9.02	8.99
CB-24G	DMH-24B	34.0	0.050	6.000	0.30	3.56	0.39	5.23	4.89	0.010	9.22	9.22
CB-24J	DMH-24E	41.0	0.072	6.000	0.43	4.98	0.55	5.90	5.10	0.020	9.26	9.25
CB-24K	DMH-24I	9.0	0.156	6.000	0.94	1.45	2.70	5.80	5.67	0.014	9.02	8.97
DMH-24I	DMH-24I	54.0	0.183	6.000	1.10	1.87	3.16	6.70	5.41	0.024	9.42	8.97
DMH-24H	DMH-24H	173.0	0.339	5.849	2.03	3.61	2.58	6.41	3.63	0.010	9.83	9.26
DMH-24H	DMH-24E	23.0	0.339	5.748	1.86	5.04	2.50	3.63	3.07	0.020	9.22	9.15
CB-24M	DMH-24L	18.0	0.458	6.000	2.76	6.50	3.51	3.10	2.50	0.033	9.18	9.05
CB-24P	DMH-24N	23.0	0.675	6.000	4.08	5.25	5.20	4.60	4.10	0.022	8.92	8.62
CB-24O	DMH-24N	21.0	0.548	6.000	3.31	7.38	4.22	5.00	4.10	0.043	8.80	8.62
CB-24Q	DMH-24N	154.0	0.071	6.000	0.43	3.83	0.55	6.60	4.00	0.010	8.64	8.62
CB-24S	DMH-24R	28.0	0.171	6.000	1.03	4.42	1.31	6.60	6.20	0.015	9.39	9.37
CB-24T	DMH-24R	11.0	0.775	6.000	4.89	-11.77	5.97	5.40	6.60	-0.109	9.56	9.37
CB-24U	DMH-24R	116.0	0.161	6.000	0.97	2.96	1.24	7.10	6.30	0.007	9.46	9.37
DMH-24R	DMH-24N	300.0	1.106	5.719	6.38	6.58	3.61	6.10	4.10	0.007	9.73	8.62
DMH-24N	DMH-24L	294.0	2.400	5.153	12.47	16.16	3.97	4.00	2.50	0.005	9.94	9.05
DMH-24L	DMH-24E	80.0	2.856	4.931	14.20	14.86	4.52	2.50	2.15	0.004	9.54	9.23
CB-24F	DMH-24E	15.0	0.136	6.000	0.82	3.05	1.05	5.73	5.62	0.007	9.26	9.25
DMH-24E	DMH-24B	37.0	3.403	4.876	16.73	76.96	2.37	1.35	0.87	0.013	9.14	9.12
CB-24D	DMH-24B	35.0	0.121	6.000	0.73	1.51	2.09	6.65	6.10	0.016	9.36	9.23
DMH-24B	DMH-24A	47.0	3.574	4.831	17.40	63.05	2.48	0.87	0.45	0.009	9.10	9.07
DMH-24A	DMH-105	199.0	3.574	4.773	17.20	25.90	2.43	0.30	0.00	0.002	9.05	8.92
DMH-105	MH-68	43.0	32.382	3.593	117.29	268.27	4.90	-0.04	-0.21	0.004	8.82	8.77
MH-68	DMH-107	222.0	32.731	3.581	118.16	268.94	4.93	-0.21	-1.04	0.004	8.72	8.48
DMH-107	DMH-F10	172.0	34.528	3.521	122.56	256.30	5.09	-1.04	-1.67	0.004	8.43	8.23
DMH-F10	DMH-G9	374.0	42.617	3.476	149.34	267.30	6.07	-1.67	-3.16	0.004	8.16	7.54
CB-G12SE	DMH-G12	13.0	0.075	6.000	0.46	5.13	0.58	8.00	7.73	0.021	12.20	12.20
CB-G13SE	DMH-G13	13.0	0.107	6.000	0.65	5.04	0.62	7.60	7.24	0.020	11.80	11.80
DMH-63B	DMH-G14	23.0	0.241	6.000	1.48	2.97	2.68	4.75	4.50	0.011	12.16	12.10
CB-G16SE	DMH-G15	13.0	0.082	6.000	0.49	5.04	0.63	7.70	7.44	0.020	11.80	11.80
MH-74	DMH-G16	10.0	1.029	4.200	4.38	4.63	5.55	4.90	4.80	0.010	11.89	11.80
DMH-G15	DMH-G14	24.0	1.113	4.198	4.71	9.83	2.67	4.71	4.50	0.009	12.15	12.10
CB-G14SW	DMH-G14	17.0	0.082	6.000	0.38	5.11	0.48	7.80	7.45	0.021	12.10	12.10
DMH-G14	DMH-G13	167.0	1.764	4.186	7.40	9.34	4.19	4.50	3.18	0.008	12.83	11.80
CB-G13SW	DMH-G13	13.0	0.103	6.000	0.62	4.84	0.79	7.60	7.26	0.018	11.80	11.80
DMH-G13	DMH-G12	149.0	2.399	4.132	9.99	20.13	3.18	2.68	1.50	0.008	12.49	12.20
CB-G12SW	DMH-G12	13.0	0.045	6.000	0.27	5.13	0.35	7.73	7.73	0.021	12.20	12.20
DMH-G12	DMH-G11	47.0	2.639	4.070	10.83	20.34	3.45	1.50	1.12	0.008	13.01	12.90
CB-E8SW	DMH-E6	9.0	0.247	6.000	1.49	3.56	1.90	8.61	8.52	0.010	12.12	12.10
CB-E6NW	DMH-E6	26.0	0.247	6.000	1.49	3.56	1.90	8.78	8.52	0.010	12.15	12.10
CB-E3SW	DMH-E3	12.0	0.156	6.000	0.94	3.56	1.20	8.10	8.98	0.010	13.21	13.20
CB-E3NW	DMH-E3	26.0	0.151	6.000	0.91	3.63	1.16	10.19	9.92	0.010	13.22	13.20
DMH-E3	DMH-E4	140.0	0.307	5.933	1.84	10.50	1.04	8.09	6.69	0.010	13.25	13.21
CB-E4NW	DMH-E4	26.0	0.134	6.000	0.81	4.99	1.03	9.50	8.99	0.020	13.52	13.51
CB-E4SW	DMH-E4	9.0	0.176	6.000	1.07	5.18	1.36	9.50	9.31	0.021	13.45	13.44
DMH-E4	DMH-E5	122.0	0.817	5.529	3.44	10.50	1.95	6.69	6.47	0.010	13.19	13.06
DMH-E10	DMH-E5	36.0	0.983	6.000	5.83	22.62	1.85	5.33	4.97	0.010	12.83	12.80
CB-E8NE	DMH-E8	10.0	0.075	6.000	0.45	5.04	0.58	8.90	8.70	0.020	13.00	13.00
DMH-E8	DMH-E9	114.0	0.695	5.948	4.17	6.46	3.39	8.45	7.31	0.010	13.57	13.10
CB-E9NE	DMH-E9	10.0	0.097	6.000	0.59	5.04	0.75	8.90	8.70	0.020	13.10	13.10
DMH-E9	DMH-E5	118.0	1.390	5.847	8.19	10.50	4.54	7.06	6.88	0.010	14.12	13.40
DMH-E5	DMH-E6	104.0	2.971	5.341	15.99	22.62	5.09	4.97	3.93	0.010	12.62	12.10
DMH-E6	DMH-E7	56.0	3.464	5.279	18.44	22.62	5.87	3.93	3.37	0.010	13.07	12.70
DMH-E7	DMH-G11	41.0	3.464	5.251	18.34	31.99	5.84	2.28	1.46	0.020	13.17	12.90
DMH-G11	DMH-G10	10.0	6.122	4.052	25.00	66.13	5.09	0.62	0.36	0.026	12.84	12.80
DMH-G10	DMH-G9	18.0	6.122	4.049	24.99	41.01	5.09	0.36	0.18	0.010	12.87	12.80
DMH-G9	MH-75	128.0	49.754	2.288	114.77	0.00	5.16	-12.15	-12.15	0.000	7.38	7.23
MH-75	DMH-110	82.0	49.754	2.276	114.15	405.01	5.14	-3.16	-3.91	0.009	7.23	7.13
DMH-110	DMH-111	211.0	49.754	2.268	113.75	260.76	6.12	-3.91	-4.71	0.004	7.02	6.78
DMH-111	O-1	67.0	49.754	2.247	112.71	268.68	5.09	-4.71	-4.96	0.004	5.28	5.20
CB-2	DMH-3	20.0	0.223	6.000	1.35	3.80	4.51	7.72	7.48	0.012	8.21	7.89
CB-1	DMH-3	72.0	0.203	6.000	1.23	3.09	3.70	7.55	7.01	0.008	8.02	7.58
DMH-3	DMH-4	57.0	0.426	5.942	2.55	10.13	4.77	6.91	6.38	0.009	7.52	7.09
DMH-4	O-2	218.0	0.426	5.905	2.54	10.95	5.05	6.35	4.00	0.011	6.98	4.85

C:\Users\rmathews\Documents\0851805 AmPUD 2014-May.stc

Scenario: 100 Year with tailwater
 Current Time Step: 0.000Hr
 Conduit FlexTable: Combined Pipe/Node Report

Start Node	Slop Node	Length (Unfired) (ft)	System CA (acres)	System Intensity (in/hr)	System Rational Flow (ft ³ /s)	Capacity (Full Flow) (ft ³ /s)	Velocity (Average) (ft/s)	Invert (Upstream) (ft)	Invert (Downstream) (ft)	Slope (ft/ft)	Hydraulic Grade Line (In) (ft)	Hydraulic Grade Line (Out) (ft)
CB-G6N	DMH-G6	14.0	0.118	7.400	0.89	5.04	1.12	7.50	7.22	0.020	12.01	12.00
CB-G4E	DMH-G4	9.0	0.273	7.400	2.03	5.04	2.59	7.00	6.82	0.020	11.63	11.60
DCB-G2E	DMH-G2	12.0	0.232	7.400	1.73	5.14	2.20	6.00	4.75	0.021	9.53	9.50
CB-G1E	DMH-G1	43.0	0.179	7.400	1.34	3.55	1.70	4.00	3.57	0.010	9.46	9.40
CB-G1NE	DMH-G1	58.0	0.098	7.400	0.73	3.58	0.93	4.00	3.44	0.010	9.42	9.40
DMH-G2	DMH-G2	45.0	0.277	7.190	2.01	77.20	0.16	2.90	2.77	0.003	9.50	9.50
DMH-G1	DMH-G3	42.0	0.509	6.204	3.18	79.91	0.25	2.77	2.64	0.003	10.30	10.30
DMH-G3	DMH-G4	155.0	0.509	5.624	2.86	79.09	0.23	2.64	2.17	0.003	11.60	11.60
DMH-G4	DMH-G5	203.0	0.782	4.394	3.46	62.14	0.28	2.17	1.79	0.002	12.01	12.01
RG-G1	DMH-G5	66.0	0.000	7.400	0.00	8.13	7.72	5.32	4.29	0.016	13.42	12.02
DMH-G5	DMH-G6	118.0	0.782	3.620	2.85	137.41	0.98	1.79	0.71	0.009	12.01	12.00
DMH-G6	DMH-G7	38.0	1.015	3.540	3.62	80.72	1.04	-0.73	-0.85	0.003	12.30	12.30
DMH-G7	DMH-G8	11.0	1.015	3.516	3.60	212.16	1.04	-0.85	-1.09	0.022	12.40	12.40
DMH-G8	DMH-G9	70.0	1.015	3.509	3.59	78.67	1.04	-1.09	-1.30	0.003	12.81	12.60
CB-F7NE	DMH-F7	12.0	0.219	7.400	1.83	6.24	2.08	9.00	8.74	0.022	13.23	13.20
CB-F7NW	DMH-F7	13.0	0.000	7.400	0.00	5.04	0.00	9.00	8.74	0.020	13.20	13.20
CB-F8NE	DMH-F8	12.0	0.195	7.400	1.48	5.24	1.85	9.00	8.74	0.022	13.22	13.20
CB-F8NW	DMH-F8	13.0	0.000	7.400	0.00	5.04	0.00	9.00	8.74	0.020	13.20	13.20
CB-F8NW	DMH-F5	13.0	0.000	7.400	0.00	5.04	0.00	9.00	8.74	0.020	13.10	13.10
CB-F5NE	DMH-F5	13.0	0.212	7.400	1.58	5.04	2.01	9.00	8.74	0.020	13.13	13.10
CB-F4NW	DMH-F4	13.0	0.121	7.400	0.91	3.56	1.15	9.00	8.87	0.010	13.21	13.20
CB-F4NE	DMH-F4	12.0	0.123	7.400	0.92	3.71	1.17	9.00	8.87	0.011	13.21	13.20
CB-F3NE	DMH-F3	10.0	0.240	7.400	1.79	5.04	2.28	8.50	8.30	0.020	12.93	12.90
CB-F1NE	DMH-F1	9.0	0.093	7.400	0.82	3.76	0.79	9.90	9.80	0.011	12.90	12.90
DMH-F1	DMH-F2	78.0	0.514	7.380	3.81	6.83	2.16	8.30	7.97	0.004	13.08	12.95
DCB-F2E	DMH-F2	77.0	0.404	7.400	3.01	5.10	2.45	8.70	8.22	0.006	13.17	13.00
DMH-F2	DMH-F3	35.0	0.917	7.233	6.69	12.50	2.13	7.47	7.36	0.003	12.93	12.90
DMH-F3	DMH-C5	129.0	1.157	7.174	8.37	12.44	2.66	7.36	6.97	0.003	13.98	13.80
CB-C4SW	DMH-C4	12.0	0.075	7.400	0.58	5.04	0.72	9.10	8.86	0.020	13.40	13.40
CB-C4NW	DMH-C4	12.0	0.050	7.400	0.37	5.04	0.48	9.10	8.86	0.020	13.40	13.40
CB-C3SW	DMH-C3	12.0	0.028	7.400	0.21	11.12	0.27	9.60	8.43	0.098	13.40	13.40
CB-C3NW	DMH-C3	12.0	0.025	7.400	0.19	11.12	0.24	9.60	8.43	0.098	13.40	13.40
DMH-C3	DMH-C4	40.0	0.141	7.222	1.03	10.37	0.58	8.43	8.04	0.010	13.40	13.40
DMH-C4	DMH-C5	57.0	0.733	6.982	5.18	10.50	2.92	8.04	7.47	0.010	13.94	13.80
DMH-C6	DMH-C6	33.0	1.890	6.914	13.17	12.45	4.19	8.97	6.87	0.003	14.18	14.07
CB-C7SE	DMH-C7	14.0	0.106	7.400	0.79	5.04	1.00	9.20	8.92	0.020	13.41	13.40
CB-C7NE	DMH-C7	14.0	0.117	7.400	0.87	5.13	1.11	9.20	8.91	0.021	13.41	13.40
CB-C8SE	DMH-C8	14.0	0.146	7.400	1.09	5.04	1.38	10.70	10.42	0.020	13.61	13.60
CB-C8NE	DMH-C8	14.0	0.082	7.400	0.81	5.04	0.78	10.70	10.42	0.020	13.60	13.60
DMH-C8	DMH-C7	178.0	1.598	7.337	11.82	6.82	8.89	8.51	7.76	0.004	15.65	13.40
DMH-C7	DMH-C8	92.0	2.175	7.244	15.88	14.73	5.06	7.26	6.87	0.004	14.68	14.13
DMH-C8	DMH-F4	116.0	4.183	6.885	29.03	22.85	5.91	6.37	6.01	0.003	13.78	13.20
DMH-F4	DMH-F5	122.0	4.789	6.817	32.91	34.16	4.66	5.51	5.19	0.003	13.40	13.10
DMH-F5	DMH-D6	108.0	5.332	6.726	36.15	38.51	5.11	5.19	4.83	0.003	14.22	13.90
CB-D4NW	DMH-D4	12.0	0.112	7.400	0.83	3.56	1.06	10.30	10.18	0.010	13.41	13.40
CB-D4SW	DMH-D4	13.0	0.117	7.400	0.87	3.42	1.11	10.30	10.18	0.009	13.41	13.40
DMH-D4	DMH-D5	90.0	0.452	7.389	3.35	10.60	1.90	8.34	7.44	0.010	13.69	13.90
DCB-D6S	DMH-D6	12.0	0.434	7.400	3.24	5.04	5.80	8.80	8.55	0.020	13.30	13.10
CB-D7E	DMH-D7	54.0	0.133	7.400	0.99	5.18	1.27	8.83	7.69	0.021	13.44	13.40
DMH-D7	DMH-D8	53.0	0.995	7.251	7.27	7.90	4.11	7.69	7.39	0.006	13.35	13.10
DMH-D8	DMH-D5	179.0	1.428	7.205	10.38	8.08	6.62	7.39	6.33	0.006	16.12	13.90
DMH-D6	DMH-F6	123.0	7.212	6.852	48.36	35.58	7.03	4.83	4.46	0.003	13.88	13.20
DMH-F6	DMH-F7	122.0	7.870	6.591	52.28	38.73	7.58	4.46	4.09	0.003	13.99	13.20
DMH-F7	DMH-F8	23.0	8.089	6.534	53.28	43.98	7.72	4.09	3.99	0.004	13.39	13.24
DMH-F8	DMH-F9	10.0	8.089	6.524	53.20	94.32	7.71	3.99	3.79	0.020	12.42	12.35
DMH-F9	DMH-F10	79.0	8.089	6.519	53.16	36.76	7.71	3.79	3.55	0.003	12.22	11.69
CB-E2SE	DMH-E2	8.0	0.195	7.400	1.46	5.19	1.65	7.80	7.63	0.021	12.01	12.00
CB-E2NE	DMH-E2	49.0	0.154	7.400	1.16	3.55	1.46	7.80	7.31	0.010	12.05	12.00
DMH-E2	DMH-E1	33.0	0.348	7.283	2.55	3.56	3.28	7.31	6.98	0.010	12.87	12.50
DMH-E1	DMH-E1	9.0	0.348	7.247	2.54	3.36	3.24	6.56	5.48	0.009	12.25	12.21
CB-21	DMH-22	5.0	0.496	7.400	3.70	4.51	4.71	6.82	6.74	0.016	11.13	11.08
CB-20	DMH-22	49.0	0.428	7.400	3.20	3.53	4.07	6.82	6.34	0.010	11.47	11.08
CB-18	DMH-19	6.0	0.140	7.400	1.04	5.44	1.33	8.74	8.60	0.023	12.40	12.40
CB-17	DMH-19	49.0	0.141	7.400	1.05	3.80	1.34	8.74	8.24	0.010	12.64	12.60
CB-11	DMH-12	5.0	0.530	7.400	3.95	3.90	5.03	6.88	6.60	0.012	10.98	10.92
CB-10	DMH-12	49.0	0.419	7.400	3.13	3.58	3.98	6.88	6.17	0.010	11.30	10.92
CB-A6SE	DMH-A6	14.0	0.367	7.400	2.73	3.55	3.46	8.08	7.94	0.010	11.48	11.40
CB-A6N	DMH-A6	15.0	0.169	7.400	1.25	3.55	1.60	8.09	7.94	0.010	11.42	11.40
DMH-A6	DMH-A5	93.0	0.777	7.367	5.77	5.76	3.27	7.94	7.66	0.003	12.78	12.50
DMH-A5	DMH-A4	128.0	0.777	7.268	5.69	5.77	3.22	7.66	7.28	0.003	12.42	12.05
CB-A4S	DMH-A4	14.0	0.041	7.400	0.31	5.04	0.39	10.00	9.72	0.020	12.08	12.08
CB-A4N	DMH-A4	14.0	0.053	7.400	0.39	5.13	0.50	10.00	9.71	0.021	12.10	12.10
DMH-A4	DMH-A3	178.0	0.871	7.131	6.26	12.34	1.99	7.28	6.75	0.003	12.03	11.89
DMH-A3	DMH-A2	42.0	1.360	6.818	9.35	12.59	2.98	6.75	6.62	0.003	11.77	11.70
CB-A1S	DMH-A2	15.0	0.159	7.400	1.18	4.69	1.51	7.80	7.24	0.017	11.72	11.70
CB-A1N	DMH-A2	13.0	0.089	7.400	0.67	5.93	0.85	7.60	7.24	0.028	11.70	11.70
DMH-A2	DMH-A1	23.0	1.642	6.769	11.20	14.92	3.57	6.62	6.52	0.004	11.86	11.80
DMH-A1	DMH-I8	93.0	1.642	6.746	11.17	12.19	3.55	6.49	6.22	0.003	12.34	12.11
CB-8B	DMH-I8	22.0	0.058	7.400	0.43	3.13	0.55	8.45	8.28	0.006	12.03	12.02
CB-8C	DMH-I8	61.0	0.151	7.400	1.12	3.41	1.43	8.20	7.84	0.009	12.17	12.11
CB-8A	DMH-8	85.0	0.229	7.400	1.71	2.42	2.17	8.29	7.89	0.005	12.17	12.02
DMH-8	DMH-9	83.0	2.079	6.655	13.95	11.10	4.44	6.22	6.02	0.002	11.59	11.37
DMH-9	DMH-12	97.0	2.079	6.589	13.81	11.25	4.40	6.00	5.78	0.002	11.28	10.92
DMH-12	DMH-13	242.0	3.028	6.512	19.68	20.93	4.05	5.28	4.83	0.003	13.47	12.90
CB-C1N	DMH-C1	24.0	0.064	7.400	0.48	5.04	0.61	10.00	9.82	0.020	13.30	13.30
CB-C1SE	DMH-C1	17.0	0.056	7.400	0.42	4.95	0.53	10.00	9.87	0.019	13.30	13.30
CB-C2NE	DMH-C2	23.0	0.071	7.400	0.53	5.04	0.68	8.80	8.34	0.020	13.21	13.20
CB-C2SE	DMH-C2	13.0	0.073	7.400	0.55	5.04	0.70	8.90	8.64	0.020	13.20	13.20
DMH-C2	DMH-C1	77.0	1.629	7.281	11.95	10.50	6.77	7.83	6.85	0.010	14.30	13.30
DMH-C1	DMH-13	123.0	1.749	7.241	12.77	10.50	7.23	6.88	5.63	0.010	14.72	12.90
DMH-13	DMH-16	64.0	4.777	6.303	30.35	21.14	6.18	4.63	4.46	0.003	13.79	13.44
CB-14	DMH-16	49.0	0.081	7.400	0.61	3.60	0.77	9.21	8.71	0.010	13.45	13.44

CB-15	DMH-18	12.0	0.078	7.400	0.58	2.30	0.74	9.19	9.14	0.004	13.44	13.44
DMH-16	DMH-19	240.0	4.936	6.267	31.18	20.85	6.35	4.46	3.84	0.003	13.59	12.20
DMH-19	DMH-D1	42.0	5.217	6.134	32.26	33.91	4.56	3.34	3.23	0.003	12.15	12.05
DMH-D3	DMH-D2	46.0	1.280	7.400	9.55	7.74	5.40	6.52	6.27	0.005	12.18	11.80
CB-D2S	DMH-D2	29.0	0.214	7.400	1.60	3.17	4.22	7.00	6.77	0.008	12.05	11.80
DMH-D2	DMH-D1	104.0	1.808	7.370	13.43	11.52	8.57	5.77	4.52	0.012	14.85	12.88
DMH-D1	DMH-22	194.0	7.024	6.102	43.21	33.91	6.38	3.23	2.73	0.003	11.96	11.08
DMH-22	DMH-23	122.0	7.948	5.995	48.03	51.52	5.17	2.23	1.91	0.003	12.25	11.85
DMH-23	DMH-24	11.0	7.948	5.913	47.37	95.92	5.10	1.86	1.76	0.009	12.08	12.05
DMH-24	DMH-105	30.0	7.948	5.905	47.31	91.84	5.10	1.71	1.46	0.008	12.39	12.32
CB-30	DMH-31	47.0	0.820	7.400	2.39	3.62	3.04	7.41	6.95	0.010	12.19	11.96
CB-32O	DMH-32M	54.0	0.000	7.400	0.00	3.43	0.00	4.00	3.50	0.009	11.09	11.09
CB-32R	DMH-32P	37.0	0.386	7.400	2.88	3.31	3.67	7.64	7.32	0.009	11.93	11.69
CB-32Q	DMH-32P	22.0	0.288	7.400	2.15	2.94	2.73	7.46	7.33	0.007	11.77	11.69
DMH-32P	DMH-32M	53.0	1.266	7.365	9.40	10.99	6.32	3.02	2.44	0.011	11.51	11.09
CB-32N	DMH-32M	12.0	0.313	7.400	2.33	2.91	2.97	6.88	6.80	0.007	11.14	11.08
CB-F15	DMH-F13	17.0	0.146	7.400	1.09	5.04	1.38	7.10	6.76	0.020	11.32	11.30
CB-F14	DMH-F13	16.0	0.206	7.400	1.54	5.19	1.85	7.10	6.76	0.021	11.33	11.30
CB-F13	DMH-F12	10.0	0.000	7.400	0.00	5.04	0.00	9.30	9.10	0.020	12.65	12.65
CB-F12	DMH-F11	12.0	0.145	7.400	1.08	5.04	1.38	9.30	9.06	0.020	11.86	11.85
DMH-F11	DMH-F12	128.0	0.145	7.369	1.08	10.50	0.61	7.19	5.91	0.010	11.84	11.83
DMH-F12	DMH-F13	140.0	0.916	6.634	6.12	10.50	3.46	5.91	4.51	0.010	11.78	11.30
DMH-F13	DMH-32T	78.0	1.267	6.492	8.29	10.29	4.69	4.51	3.78	0.010	11.88	11.39
CB-32Z	DMH-32Y	31.0	0.000	7.400	0.00	2.56	7.92	3.86	3.70	0.005	12.04	11.10
DMH-32Y	DMH-32U	47.0	0.000	7.388	0.00	6.85	3.62	3.69	3.49	0.004	10.83	10.67
CB-32V	DMH-32U	27.0	0.265	7.400	1.90	3.22	2.42	6.59	6.37	0.008	10.75	10.67
CB-32W	DMH-32U	18.0	0.212	7.400	1.59	3.03	2.02	6.39	6.26	0.007	10.71	10.67
CB-32X	DMH-32U	39.0	0.217	7.400	1.62	3.32	2.06	6.29	5.86	0.009	10.75	10.67
DMH-32U	DMH-32T	119.0	1.083	7.335	8.01	6.88	8.05	3.39	2.89	0.004	13.57	11.39
DMH-32T	DMH-32S	171.0	2.350	6.436	15.25	21.96	4.37	2.78	2.29	0.003	12.41	11.94
DMH-32S	DMH-32M	277.0	2.350	6.299	14.92	22.45	4.31	2.27	1.44	0.003	11.83	11.09
DMH-32M	DMH-32L	24.0	3.930	6.074	24.05	22.15	6.17	1.42	1.35	0.003	11.50	11.37
DMH-32L	DMH-32K	9.0	3.930	6.080	24.00	43.23	6.16	1.30	1.20	0.011	11.54	11.49
DMH-32K	DMH-32	17.0	3.930	6.055	23.98	24.37	6.15	1.15	1.09	0.004	11.71	11.62
CB-34N	CB-34M	32.0	0.206	7.400	1.54	10.24	0.87	6.81	6.83	0.006	10.90	10.90
CB-34M	CB-34L	40.0	0.415	7.271	3.04	10.35	1.72	6.83	6.40	0.006	10.90	10.88
CB-34L	CB-34K	93.0	0.633	7.190	4.69	10.41	2.60	6.40	5.86	0.006	10.88	10.77
CB-34K	CB-34J	25.0	0.880	7.085	8.27	10.22	3.55	5.88	5.72	0.006	10.77	10.72
CB-34J	CB-34I	51.0	1.114	7.040	7.90	10.12	4.47	5.72	5.44	0.005	10.72	10.55
CB-34I	CB-34H	48.0	1.330	7.000	9.38	22.46	2.99	5.44	5.18	0.006	10.65	10.50
CB-34H	CB-34G	41.0	1.560	6.944	10.92	22.03	3.48	5.16	4.93	0.006	10.68	10.50
CB-34G	CB-34F	41.0	1.776	6.902	12.35	22.50	3.93	4.93	4.69	0.006	11.10	11.03
CB-34F	CB-34E	42.0	1.983	6.868	13.72	22.23	4.37	4.69	4.45	0.006	11.03	10.94
CB-34E	CB-34D	41.0	2.190	6.832	15.09	22.03	4.80	4.45	4.22	0.006	10.94	10.83
CB-34D	CB-34C	41.0	2.418	6.802	16.58	22.50	5.28	4.22	3.98	0.006	10.83	10.70
CB-34C	DMH-34A	18.0	2.641	6.775	18.03	19.61	5.74	3.98	3.90	0.004	10.74	10.67
CB-34B	DMH-34A	32.0	0.043	7.400	0.32	3.73	0.41	4.90	4.55	0.011	10.67	10.67
DMH-34A	DMH-34	87.0	2.683	6.764	18.30	23.12	5.82	3.90	3.20	0.010	11.00	10.56
CB-39D	CB-39C	70.0	0.152	7.400	1.13	3.66	1.44	6.00	5.30	0.010	9.59	9.52
CB-39C	DMH-39A	23.0	0.152	7.230	1.10	5.76	1.41	5.30	4.70	0.026	9.52	9.50
CB-39B	DMH-39A	16.0	0.258	7.400	1.92	3.66	2.45	5.11	4.95	0.010	9.55	9.50
DMH-39A	DMH-38	50.0	0.409	7.173	2.96	6.13	2.41	4.70	4.25	0.009	9.81	9.71
CB-38A	DMH-38	35.0	0.000	5.387	0.00	7.94	11.58	3.40	3.20	0.006	11.04	9.71
CB-40A	DMH-41	12.0	0.214	7.400	1.60	2.72	5.57	5.50	5.00	0.006	9.51	9.49
CB-43	DMH-44	26.0	0.124	7.400	0.92	1.56	1.18	6.16	6.11	0.002	9.76	9.73
CB-42	DMH-44	19.0	0.220	7.400	1.64	4.90	2.09	6.15	5.79	0.019	9.81	9.77
CB-45A	DMH-45	35.0	0.185	7.400	1.38	3.66	1.76	7.12	6.77	0.010	11.35	11.30
CB-46B	DMH-46A	45.0	0.148	7.400	1.09	2.19	1.99	7.75	7.30	0.010	12.01	11.90
CB-46E	DMH-46C	7.0	0.439	7.400	3.27	-2.50	9.38	10.80	10.90	-0.043	14.63	14.02
CB-46D	DMH-46C	40.0	0.168	7.400	1.25	-1.05	3.58	10.80	10.90	-0.008	14.46	14.02
CB-46H	DMH-46F	8.0	0.481	7.400	3.59	1.35	10.29	14.30	14.20	0.013	15.80	15.09
CB-46G	DMH-46F	39.0	0.138	7.400	1.03	-1.37	2.95	13.70	14.20	-0.013	15.42	15.14
CB-46M	CB-46L	58.0	0.111	7.400	0.83	1.23	3.78	16.80	16.00	0.010	17.19	16.93
CB-46L	DMH-46K	46.0	0.216	7.346	1.60	1.26	4.59	16.00	15.50	0.011	16.93	16.09
CB-46Q	DMH-46N	7.0	0.086	7.400	0.64	4.86	4.28	17.20	17.07	0.019	17.60	17.63
CB-46O	DMH-46N	23.0	0.099	7.400	0.74	1.38	4.02	17.37	17.07	0.013	17.78	17.62
CB-46P	DMH-46N	22.0	0.073	7.400	0.54	1.24	3.43	17.30	17.07	0.010	17.66	17.61
DMH-46N	DMH-46K	137.0	0.258	7.378	1.92	13.52	5.41	17.07	14.80	0.017	17.59	15.55
DMH-46K	DMH-46J	37.0	0.474	7.289	3.46	13.38	6.36	14.60	14.20	0.016	15.51	15.03
DMH-46J	DMH-46I	12.0	0.474	7.289	3.47	13.56	6.42	14.20	14.00	0.017	14.91	14.98
DMH-46I	DMH-46F	52.0	0.474	7.262	3.47	11.28	5.82	14.00	13.40	0.012	14.90	14.93
DMH-46F	DMH-46C	150.0	1.094	7.230	7.97	15.34	8.77	13.40	10.20	0.021	14.88	14.02
DMH-46C	DMH-46A	149.0	1.700	7.170	12.29	14.40	6.95	10.10	7.30	0.019	13.94	11.90
DMH-46A	DMH-45	76.0	1.846	7.095	13.20	12.47	7.47	7.30	6.20	0.014	12.09	10.66
CB-45B	DMH-45	8.0	0.168	7.400	1.28	3.31	3.61	6.80	6.20	0.075	10.97	10.88
CB-45C	DMH-45	33.0	0.168	7.400	1.41	-2.63	1.79	6.85	7.03	-0.005	11.36	11.31
DMH-45	DMH-44	182.0	2.369	7.058	17.00	23.36	5.41	6.20	4.28	0.011	10.73	9.70
DMH-44	DMH-41	186.0	2.732	6.940	19.12	48.13	2.70	4.16	3.27	0.006	9.84	9.49
CB-40	DMH-41	3.0	0.120	7.400	0.89	5.44	1.14	5.48	5.41	0.023	9.49	9.49
CB-39	DMH-41	38.0	0.264	7.400	1.97	3.37	2.51	5.23	4.89	0.009	9.81	9.49
DMH-41	DMH-38	60.0	3.330	6.700	22.49	59.08	2.34	3.22	3.02	0.003	9.74	9.71
DMH-38A(Pariners)	DMH-38	123.0	6.662	7.400	48.95	55.92	5.09	3.40	3.02	0.003	10.00	9.71
DMH-38	DMH-37	431.0	10.302	5.376	55.82	74.62	6.07	3.02	1.86	0.003	11.22	10.00
CB-36	DMH-37	3.0	0.510	7.400	3.81	6.50	4.85	5.72	5.62	0.033	10.03	10.00
CB-35	DMH-37	36.0	0.438	7.400	3.27	3.51	4.16	5.80	5.45	0.010	10.30	10.00
DMH-37	DMH-34	101.0	11.250	5.223	59.24	74.26	6.34	1.84	1.57	0.003	10.87	10.56
DMH-34	DMH-33B	71.0	13.934	5.199	73.02	78.12	7.44	1.66	1.35	0.003	11.56	11.26
DMH-33B	DMH-33A	12.0	13.934	5.184	72.81	131.12	7.42	1.30	1.20	0.008	11.43	11.38
DMH-33A	DMH-32	24.0	13.934	5.181	72.77	77.57	7.42	1.15	1.08	0.003	11.72	11.62
CB-32D	DMH-32B	39.0	0.140	7.400	1.04	3.33	1.33	6.62	6.28	0.009	10.47	10.44
CB-32C	DMH-32B	21.0	0.134	7.400	1.00	3.21	1.28	6.60	6.73	0.009	10.41	10.39
CB-32I	DMH-32H	17.0	0.163	7.400	1.36	1.31	3.91	6.70	6.50	0.012	10.04	9.83
CB-32J	DMH-32H	48.0	0.171	7.400	1.27	1.23	3.65	6.40	5.90	0.010	10.36	9.83
DMH-32H	DMH-32E	119.0	0.353	7.354	2.82	22.14	0.83	5.90	4.76	0.010	9.82	9.80
CB-32G	DMH-32E	44.0	0.088	7.400								

DMH-28	DMH-28	165.0	19.902	5.091	102.12	180.57	4.66	0.65	0.35	0.002	12.50	12.35
CB-27	DMH-25	159.0	20.393	5.034	103.49	178.27	4.60	0.35	0.07	0.002	12.32	12.17
CB-28	DMH-25	5.0	0.282	7.400	1.96	2.76	2.49	8.42	8.39	0.006	12.52	12.51
DMH-25	DMH-105	48.0	0.205	7.400	1.63	3.63	1.95	8.41	7.94	0.010	12.69	12.61
CB-24C	DMH-24B	61.0	20.860	4.981	104.73	179.83	4.65	0.07	-0.04	0.002	12.14	12.08
CB-24G	DMH-24E	34.0	0.060	7.400	0.57	3.66	0.48	5.23	4.89	0.010	10.42	10.42
CB-24J	DMH-24I	41.0	0.072	7.400	0.54	4.98	0.69	5.90	5.10	0.020	10.09	10.08
CB-24K	DMH-24I	9.0	0.156	7.400	1.16	1.45	3.33	5.80	5.67	0.014	9.05	8.97
DMH-24I	DMH-24H	54.0	0.183	7.400	1.36	1.87	3.90	6.70	6.41	0.024	9.66	9.67
DMH-24H	DMH-24E	173.0	0.339	7.352	2.51	3.81	3.19	5.41	3.63	0.010	10.78	9.90
CB-24M	DMH-24L	23.0	0.339	7.162	2.44	6.04	3.11	3.53	3.07	0.020	10.19	10.08
CB-24P	DMH-24N	18.0	0.456	7.400	3.40	6.50	4.33	3.10	2.50	0.033	9.21	9.05
CB-24O	DMH-24N	23.0	0.675	7.400	5.04	5.25	6.41	4.60	4.10	0.022	9.08	8.62
CB-24Q	DMH-24N	21.0	0.648	7.400	4.09	7.38	5.20	5.00	4.10	0.043	8.90	8.62
CB-24S	DMH-24N	154.0	0.071	7.400	0.53	3.83	0.67	6.60	4.00	0.010	8.65	8.62
CB-24T	DMH-24R	26.0	0.171	7.400	1.27	4.42	1.82	6.80	6.20	0.015	9.40	9.37
CB-24U	DMH-24R	11.0	0.775	7.400	5.78	-11.77	7.36	5.40	6.60	-0.109	9.66	9.37
DMH-24R	DMH-24N	116.0	0.161	7.400	1.20	2.96	1.63	7.10	6.30	0.007	9.50	9.37
DMH-24N	DMH-24L	300.0	1.106	7.134	7.98	8.58	6.10	6.10	4.10	0.007	10.34	8.62
DMH-24L	DMH-24E	294.0	2.400	6.599	15.97	16.18	5.08	4.00	2.50	0.005	10.51	9.05
CB-24F	DMH-24E	80.0	2.866	6.396	18.42	14.86	5.88	2.50	2.15	0.004	10.61	10.08
DMH-24E	DMH-24B	15.0	0.136	7.400	1.02	3.05	1.29	5.73	5.62	0.007	10.09	10.08
CB-24D	DMH-24B	37.0	3.403	6.348	21.76	76.86	3.08	1.35	0.87	0.013	10.46	10.42
DMH-24B	DMH-24A	35.0	0.121	7.400	0.90	1.51	2.58	6.65	6.10	0.016	10.61	10.42
DMH-24A	DMH-105	47.0	3.674	6.306	22.72	63.05	3.21	0.67	0.45	0.009	10.89	10.84
DMH-105	MH-68	199.0	3.674	6.255	22.54	25.60	3.19	0.30	0.00	0.002	12.17	11.94
MH-68	DMH-107	43.0	32.382	4.981	161.92	266.27	6.73	-0.04	-0.21	0.004	11.71	11.62
DMH-107	DMH-F10	222.0	32.731	4.951	163.33	268.94	6.76	-0.21	-1.04	0.004	11.51	11.05
DMH-F10	DMH-G9	172.0	34.528	4.900	170.53	255.30	7.04	-1.04	-1.67	0.004	10.94	10.65
DMH-G9	DMH-G12	374.0	42.617	4.862	208.85	267.30	8.44	-1.87	-3.16	0.004	10.40	9.21
CB-G12SE	DMH-G13	13.0	0.075	7.400	0.66	5.13	0.02	8.00	7.73	0.021	12.20	12.20
CB-G13SE	DMH-G14	13.0	0.107	7.400	0.80	5.04	1.01	7.50	7.24	0.020	11.81	11.80
DMH-G13	DMH-G15	23.0	0.241	7.400	1.80	2.97	3.30	4.75	4.50	0.011	12.19	12.10
DMH-G14	DMH-G16	13.0	0.082	7.400	0.61	5.04	0.78	7.70	7.44	0.020	11.80	11.80
CB-G15SE	DMH-G17	10.0	1.029	6.300	5.50	4.63	7.00	4.60	4.80	0.010	11.94	11.80
MH-74	DMH-G18	24.0	1.113	6.298	5.95	9.83	3.36	4.71	4.50	0.009	12.18	12.10
DMH-G15	DMH-G19	17.0	0.082	7.400	0.46	5.11	0.69	7.80	7.45	0.021	12.10	12.10
CB-G14SW	DMH-G20	167.0	1.754	5.287	9.35	9.34	5.29	4.50	3.18	0.008	13.12	11.80
DMH-G14	DMH-G21	13.0	0.103	7.400	0.77	4.84	0.98	7.50	7.25	0.018	11.81	11.80
CB-G13SW	DMH-G22	149.0	2.399	5.238	12.67	20.13	4.03	2.68	1.50	0.009	12.67	12.20
DMH-G13	DMH-G23	13.0	0.045	7.400	0.34	6.13	0.43	8.00	7.73	0.021	12.20	12.20
CB-G12SW	DMH-G24	47.0	2.639	5.180	13.78	20.34	4.39	1.50	1.12	0.008	13.07	12.90
DMH-G12	DMH-E6	9.0	0.247	7.400	1.84	3.66	2.34	8.61	8.52	0.010	12.12	12.10
CB-E6SW	DMH-E7	26.0	0.247	7.400	1.84	3.66	2.35	8.78	8.52	0.010	12.17	12.10
CB-E6NW	DMH-E8	12.0	0.165	7.400	1.16	3.66	1.48	9.10	8.98	0.010	13.21	13.20
CB-E6SW	DMH-E9	26.0	0.151	7.400	1.13	3.63	1.43	10.19	9.92	0.010	13.23	13.20
CB-E6NW	DMH-E10	140.0	0.307	7.337	2.27	10.60	1.28	8.09	6.69	0.010	13.70	13.63
DMH-E3	DMH-E11	26.0	0.134	7.400	1.00	4.99	1.27	9.50	8.99	0.020	13.72	13.70
CB-E4NW	DMH-E12	9.0	0.178	7.400	1.32	5.18	1.68	9.50	9.31	0.021	13.71	13.70
CB-E4SW	DMH-E13	122.0	0.617	6.955	4.33	10.50	2.45	6.69	5.47	0.010	13.61	13.40
DMH-E4	DMH-E14	35.0	0.963	7.400	7.19	22.82	2.29	5.33	4.97	0.010	13.25	13.23
DMH-E10	DMH-E15	10.0	0.075	7.400	0.66	5.04	0.71	8.90	8.70	0.020	13.00	13.00
CB-E8NE	DMH-E16	114.0	0.695	7.351	5.15	6.46	4.19	8.45	7.31	0.010	13.82	13.10
DMH-E8	DMH-E17	10.0	0.097	7.400	0.73	5.04	0.93	8.90	8.70	0.020	13.10	13.10
CB-E9NE	DMH-E18	118.0	1.390	7.255	10.17	10.50	5.75	7.06	5.88	0.010	14.51	13.40
DMH-E9	DMH-E19	104.0	2.971	6.781	20.30	22.62	6.46	4.97	3.93	0.010	12.94	12.10
DMH-E6	DMH-E20	58.0	3.464	6.724	23.48	22.62	7.47	3.93	3.37	0.010	13.30	12.70
DMH-E8	DMH-G11	41.0	3.464	6.698	23.39	31.99	7.45	2.28	1.48	0.020	13.34	12.90
DMH-E7	DMH-G10	10.0	6.122	5.163	31.67	66.13	6.49	0.62	0.36	0.028	12.88	12.80
DMH-G11	DMH-G9	18.0	6.122	5.161	31.65	41.01	6.49	0.38	0.18	0.010	12.91	12.80
DMH-G10	MH-75	128.0	49.754	3.454	173.72	0.00	7.53	-12.15	-12.15	0.000	8.86	8.54
DMH-G9	DMH-110	82.0	49.754	3.453	173.16	405.01	7.51	-3.18	-3.91	0.009	8.64	8.33
MH-75	DMH-111	211.0	49.754	3.445	172.79	260.76	7.50	-3.91	-4.71	0.004	8.10	7.67
DMH-110	O-1	67.0	49.754	3.427	171.85	258.88	7.46	-4.71	-4.98	0.004	5.37	5.20
DMH-111	DMH-3	20.0	0.223	7.400	1.68	3.90	4.77	7.72	7.48	0.012	8.27	7.94
CB-2	DMH-4	72.0	0.203	7.400	1.52	3.09	3.91	7.55	7.01	0.008	8.07	7.67
CB-1	DMH-3	57.0	0.426	7.336	3.16	10.13	5.06	6.91	6.38	0.009	7.59	7.18
DMH-3	O-2	218.0	0.426	7.296	3.13	10.98	5.38	6.39	4.00	0.011	7.05	4.85


C:\Users\rmathews\Documents\0851805 AmPUD 2014-May.stc

Long Term Best Management Practices Checklist

Assembly Square PUD, Somerville, MA
Long Term Best Management Practices – Maintenance/ Evaluation Checklist

Best Management Practice	Inspection Frequency	Date Inspected	Inspector	Minimum Maintenance and Key Items to Check	Cleaning/Repair Needed ☐ yes ☐ no (List Items)	Date of Cleaning/Repair	Performed by
Pavement Sweeping	Minimum four times per year Minimum four times per year				☐ yes ☐ no		
Catch Basins with Deep Sumps & Oil/Debris Traps	Monthly for first 3 months then annually			Sediment (if more than six inches deep) and/or floatable pollutants shall be pumped from the basin and disposed of at an approved offsite facility in accordance with all applicable regulations. Any structural damage or other indication of malfunction will be reported to the site manager and repaired as necessary. During colder periods, the catch basin grates must be kept free of snow and ice. During warmer periods, the catch basin grates must be kept free of leaves, litter, sand, and debris.	☐ yes ☐ no		
Subsurface Detention System	Monthly for first 3 months then annually			All subsurface detention systems shall be inspected at least once each year. If sediment is more than six inches deep, it must be suspended via flushing with clean water and removed using a vector truck. System will be observed after rainfalls to see if it is properly draining.	☐ yes ☐ no		
Structural Water Quality Devices	Monthly for first 3 months then a minimum four times per year			Cleaned a minimum of at least once per year or when sediment depth reaches within six inches of the dry weather water surface elevation. Follow manufacturer instructions for inspection and cleaning and contact manufacturer if system is malfunctioning.	☐ yes ☐ no		
Bioretention Area and Sediment Forebay	2 times in the first year then annually			Invasive plants, weeds, erosion, litter, mulch depth and condition. Weeds and invasive plant species shall be removed by hand. Leaf litter and other debris shall be removed twice per year. If needed to maintain aesthetic appearance, perennial plantings may be trimmed at the end of the growing season.	☐ yes ☐ no		
Green Roofs	Annually			Plant health, replace as necessary. Drains should be examined annually to ensure that they have not become clogged with sediment or organic debris.	☐ yes ☐ no		
Roof Drain Leaders	Quarterly			Keep roof clean and free of debris. Keep roof drainage systems clear. Keep roof access limited to authorized personnel. Clean inlets draining to the subsurface bed twice per year as necessary.	☐ yes ☐ no		
Vegetated Areas	Bi-annually			Inspect planted areas on a semi-annual basis and remove any litter. Maintain planted areas adjacent to pavement to prevent soil washout. Immediately clean any soil deposited on pavement. Re-seed bare areas; install appropriate erosion control measures when native soil is exposed or erosion channels are forming. Plant alternative mixture of grass species in the event of unsuccessful establishment. The grass vegetation should not be cut to a height less than four inches. No pesticides are to be used unless a single spot treatment is required for a specific control application. Fertilizer usage should be avoided. If deemed necessary, slow release fertilizer should be used. Fertilizer may be used to begin the establishment of vegetation in bare or damaged areas, but should not be applied on a regular basis unless necessary.	☐ yes ☐ no		
Permeable Pavers	Monthly for first 3 months then annually			Vacuum sweeping or pressure wash. Inspect once per year and clean as necessary. Shovel snow off permeable pavers as necessary. Do not apply abrasives such as sand or grit on or adjacent to permeable pavers. Avoid piling of areas with permeable pavers.	☐ yes ☐ no		
Tide Gate/Stormwater Outfall	Monthly for first 3 months then annually			Follow manufacturer instructions for inspection and cleaning and contact manufacturer if system is malfunctioning. Ensure proper functioning and correct any areas that have settled or experienced washouts.	☐ yes ☐ no		

Stormwater Control Manager _____

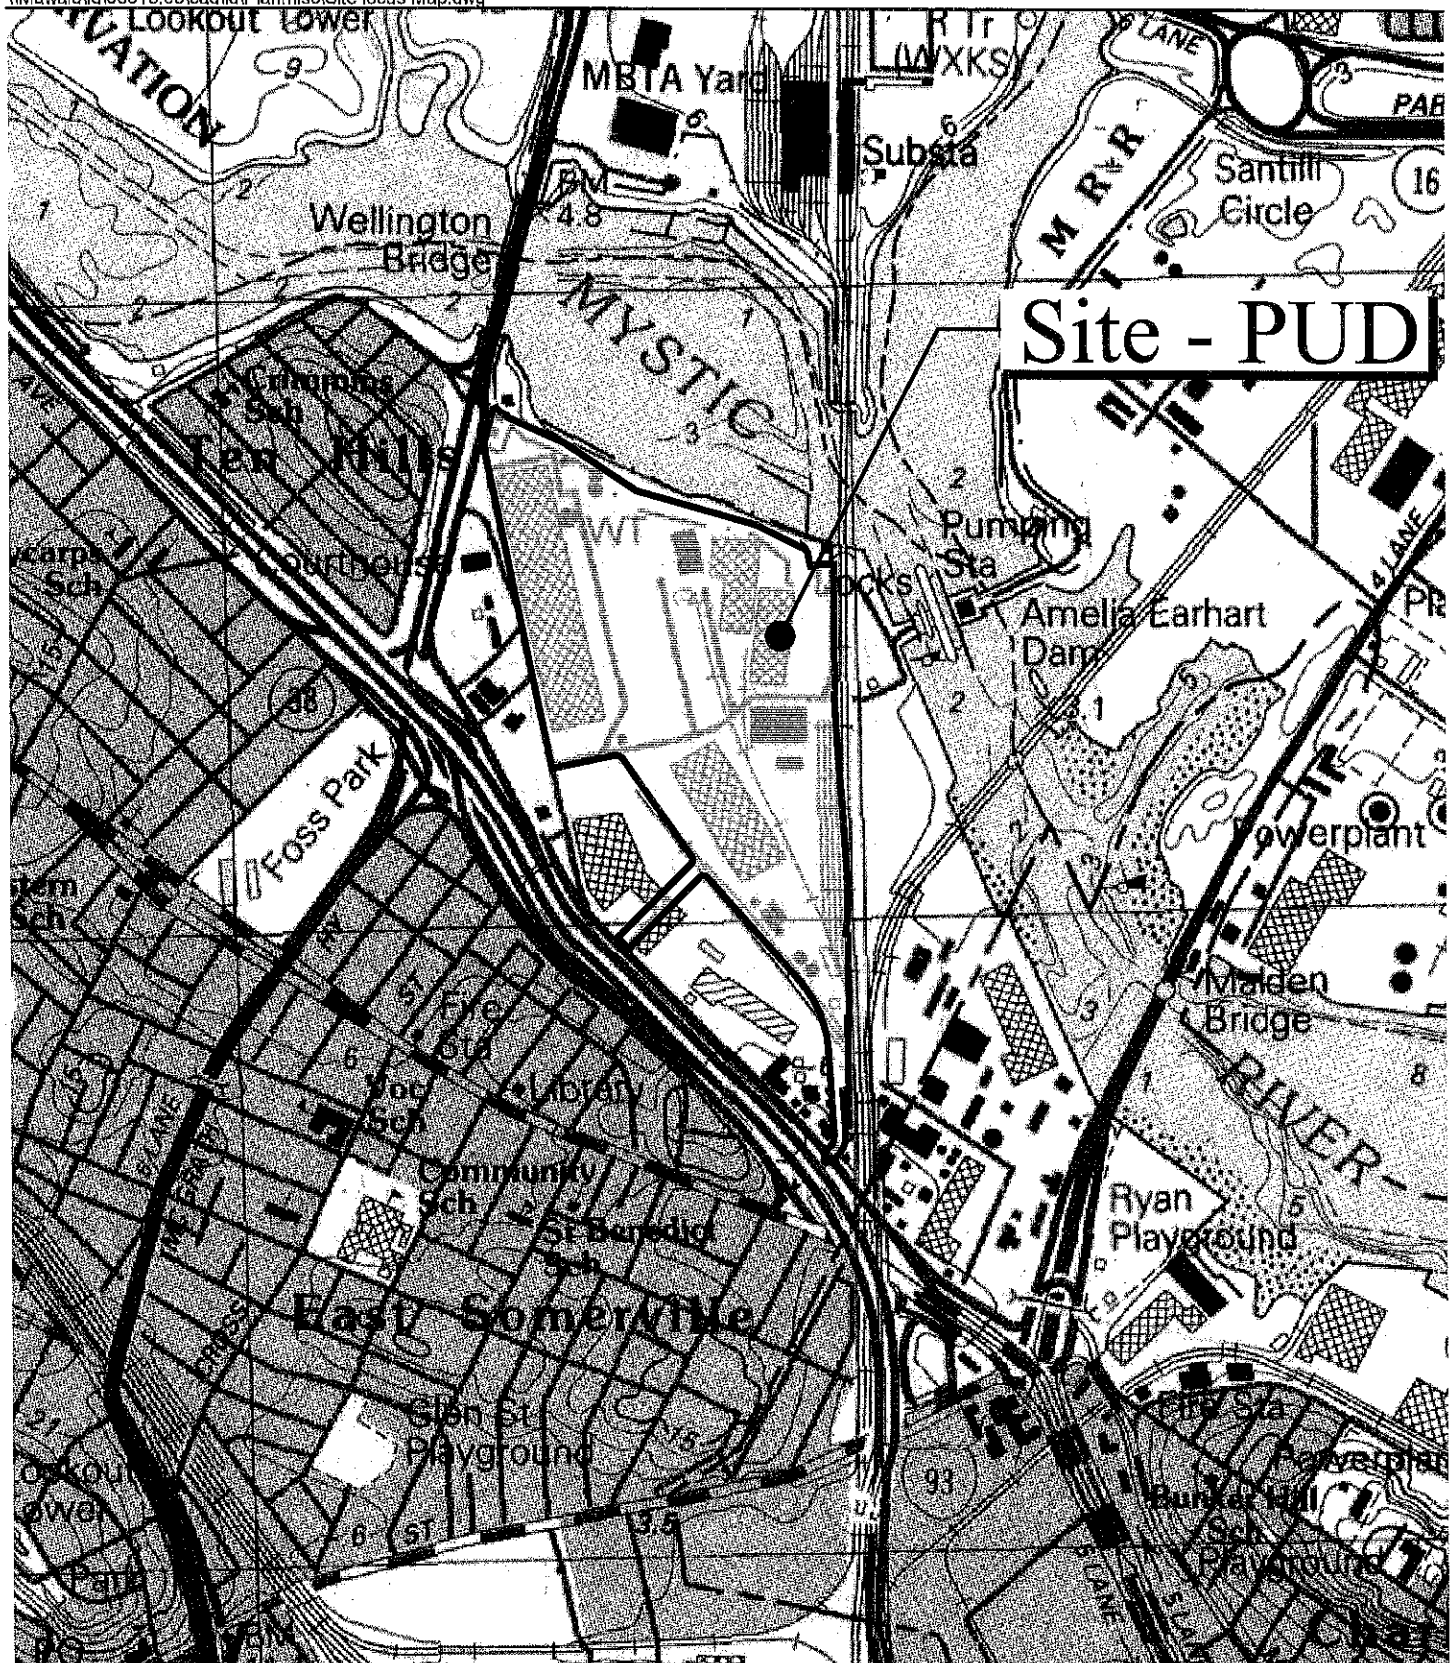

Vanasse Hangen Brustlin, Inc.



0 500 1000 Feet

Site Location Map
Assembly Row
at Assembly Square
Amended Preliminary Master Plan
Planned Unit Development
Somerville, MA

Figure 1
July 2010

Figure 2: Existing Water Demand

Project: Assembly Square Planned Unit Development Proj. No. :

8518.05

Date: 6/8/2010

Location: Somerville, Massachusetts

Rev. Date

Computed by: MVG

Checked by:

File: \\Mawald\ld\08518.05\docs\VARIOUS\AmPUD\Utilities\Water\08518.05 Existing Water Demand.xml\Water Demands Fig 4

1. Average flows for Massachusetts are based on 314 CMR 7: Sewer System Extension and Connection Program.

Existing Uses to remain out side of Phase 1-AA but within the Planned Unit Development

Building Identification	Use	Square Feet	Quantity	Unit	Unit Flow (gal/Unit)	Average Flow (GPD)	Total Bldg. Flow (GPM)	Total Peak Bldg. Flow (GPM) ¹
Assembly Marketplace	Retail	328,806	329	1,000 SF	50	16,440	11	20
Yacht Club	Marina	-	80	Slip	10	800	1	1
Amelia Earhart Dam	Offices	1,000	1	1000 SF	75	75	0	1
Spaulding Brick	Industrial	11,700	12	1000 SF	75	878	1	1
Trucking Company	Industrial	26,910	27	1000 SF	75	2,018	1	2
La Quinta Inn	Hotel	77,678	172	1 Bedroom	110	18,920	13	23
Religious	Institutional	15,842	16	1000 SF	50	792	1	1
County	Institutional	32,432	32	1000 SF	75	2,432	2	3
Sunrise Cuisine	Restaurant	4,326	40	1 Seat	35	1,400	1	2
Dunkin Donuts	Restaurant	4,006	12	1 Seat	20	240	0	1
Warehouse	Industrial	8,369	8	1000 SF	75	628	0	1
99 Restaurant	Restaurant	11,382	393	1 Seat	35	13,755	10	17
Office	Offices	114,559	115	1000 SF	75	8,592	6	10
Loew's Cinema	Cinema	80,000	2,400	1 Seat	5	12,000	8	15
Home Depot	Retail	147,608	148	1000 SF	50	7,380	5	9
Circuit City	Retail	33,488	33	1000 SF	50	1,674	1	2
Enterprise Rent A Car	Retail	2,000	2	1000 SF	50	100	0	1
Hillside Service Center	Commercial	4,656	Min Allow	2	150	300	0	1
Ashton Fuel	Commercial	15,405	15	1,000	50	770	1	1
Tracer Technologies	Industrial	30,995	31	1,000	75	2,325	2	3
						91,520	64	115

1) Maximum Day Demand Peaking Factor = 1.75 Times Average Day Demand. Minimum peak flow = 1 PGM

**Amended Preliminary Master Plan
Existing Sewer Generation within Assembly Square Revitalization Area
Somerville, MA**

Building Identification	Use	Building (SF. Ft.)	Number	Unit	Unit Flow Rate (GPD)	Flows Removed Phase 1	Flows Removed Full Build	Flows To Remain
85 Foley St.- Cab repair ¹	Gasoline Station with Service Bays	3,677	1	Island	300		300	
			4	Bay	125		500	
99 Foley St.- Central Steel ¹	Industrial ²	51,217	13	Person	15		195	
	Office	2,961	3	1000 SF	75		222	
123 Foley St.- Spaulding Brick ¹	Industrial ³	16,880	5	Person	15	75		
	Office	2,920	3	1000 SF	75	219		
147 Foley St. American Propane	Office	1,050	1	1000 SF	75	79		
100 Sturtevant	Industrial ²	22,760	15	Person	15	225		
	Office	3,772	4	1000 SF	75	283		
Yacht Club	Marina		80	slip	10			800
Goodtime Billiards ⁴	-	109,232						
	Restaurant/ Tavern/ Lounge		508	Seat	35	17,780		
	Bowling Alley		4	Alley	100	400		
	Function Hall		438	Seat	15	6,570		
Boston Paintball	Retail	39,162	39	1000 SF	50	1,958		
World Gym	Retail	26,606	27	1000 SF	50	1,330		
Graybar	Industrial ³	26,609	15	Person	15	225		
Home Depot	Retail	147,608	148	1000 SF	50			7,380
Circuit City	Retail	33,488	33	1000 SF	50			1,675
Amelia Earhart Dam	Office	1,000	1	1000 SF	75			75
Totals:						29,144	1,217	9,930

1. Flows to be removed before next phases.

2. Population for Industrial uses based on available parking spaces.

3. Assumed population.

4. Goodtime sewer generation based on floor plan received from City of Somerville Inspectional Services on August 4, 2009.



Vanasse Hangen Brustlin, Inc.
Consulting Engineers and Planners
101 Walnut Street
Watertown, MA 02172
(617) 924-1770

Figure 3.2 - Estimated Sewer Generation and Water Demand

Project: Assembly Square Planned Unit Development
Full Build Sewer Generation - 2014 Program
Location: Somerville, Massachusetts

Proj. No.: 06518.05
Date: 4/28/2014
Computed by: HGH
Checked by:

Development Program and Projected Sewer Flows

Development Program and Projected Sewer Flows													
Phase	Block	Comments ¹	Use ²	Area ³ (SF)	Unit	Quantity	Unit Flow ⁴ (Gd/Unit)	Average Flow (GPD)	Total Block Flow (GPD)	Total Phase Flow (GPD) ⁵	Water Flow GPM	Peak Water GPM	
1AA	10	4,800	Restaurant	4,800	1 Seat	98	20	1,960	1,960				
1A	1	67,530	Retail	43,818	1,000 SF	44	50	2,181					
			Apartment	225,615	1 Bedroom	293	110	32,230		79,421			
			Apartment		Dwelling Units	195							
			Restaurant	23,712	1 Seat	1,200	35	42,000					
	2B		Office	93,183	1,000 SF	93	75	6,989					
		30,000	Retail	16,000	1,000 SF	16	60	960		21,869			
			Restaurant	12,000	1 Seat	400	35	14,000					
	3	122,914	Retail	118,914	1,000 SF	114	60	5,688					
			Cinema	60,000	1 Seat	1,580	5	7,950					
			Bowling	0	1 Lane	0	100	0		21,898			
			Restaurant	4,800	1 Seat	150	35	5,250					
			Fast Food	4,500	1 Seat	150	20	3,000					
	4		Apartment	249,994	1 Bedroom	389	110	42,790					
			Apartment		Dwelling Units	253				48,539			
		43,976	Retail	49,775	1,000 SF	41	60	2,039					
			Restaurant	3,200	1 Seat	106	35	3,710					
	KIOSK	3,605	Fast Food	3,605	1 Seat	77	20	1,540	1,540				
	Full Build Remaining Phases	5	60,000	Retail	43,200	1,000 SF	43	60	2,180				
				Office	250,000	1,000 SF	250	75	18,750				
				Apartment	0	1.7 Bedroom	0	167	0		57,805		
			Fast Food	3,800	1 Seat	152	20	3,040					
			Hotel	104,560	1 Bedroom	170	110	18,700					
6A		35,000	Restaurant	13,000	1 Seat	433	35	15,155					
			Retail	25,000	1,000 SF	25	60	1,250					
			Office	0	1,000 SF	0	75	0		12,000			
			Fast Food	2,500	1 Seat	100	20	2,000					
6B			Restaurant	7,500	1 Seat	250	35	8,750					
			Condo	485,000	1.7 Bedroom	405	167	75,735					
			Retail	0	1,000 SF	0	60	0		75,735			
			Fast Food	0	1 Seat	0	20	0					
			Restaurant	0	1 Seat	0	35	0					
7		48,000	Retail	90,000	1,000 SF	90	60	1,800					
			Office	450,000	1,000 SF	450	75	33,750					
			Office	0	1,000 SF	0	75	0		176,230			
			Condo	798,000	1.7 Bedroom	640	167	118,880					
			Fast Food	3,500	1 Seat	140	20	2,800					
8			Restaurant	15,000	1 Seat	500	35	17,500					
		38,000	Retail	20,000	1,000 SF	20	60	1,000					
			Office	583,150	1,000 SF	583	75	41,486					
			Fast Food	4,000	1 Seat	160	20	3,200		125,139			
			Restaurant	12,000	1 Seat	400	35	14,000					
9			Condo	420,000	1.7 Bedroom	350	167	65,460					
			Office	300,000	1,000 SF	300	75	22,500		22,500			
		75,000	Retail	40,000	1,000 SF	40	60	2,000					
			Office	1,155,000	1,000 SF	1,166	75	86,625		133,970			
			Fast Food	15,000	1 Seat	600	20	12,000					
11			Restaurant	20,000	1 Seat	667	35	23,345					
			Health Club	50,000	1 Locker	500	20	10,000					
				5,692,486	774,620				FULL BUILD TOTAL	774,620	538	941	

Notes:

- Retail was space allocated at by 20.3% for estimated restaurant areas and by 6.0% for fast food within all future Blocks. Future Phase Building Program Info taken from Street-Works LLC Proposed Phasing Schedule dated 2/13/09. Total restaurant area - 121,701 square feet (includes Block 10 and IKEA).
- Restaurant seats are based on 30 square feet per seat within future phases.
- Average flows for Massachusetts are based on 314 CMR 7: Sewer System Extension and Connection Program.
- Not used.
- The previously permitted sewer flow for both Phase 1AA and Phase 1A is 173,146 gpd. The current building program from actual tenanting information for Phase 1AA and 1A is 1,257 gpd less than permitted. The surplus sewer flow will be applied to the Full Build Remaining Phases.
- The Full Build Remaining Phases requested permit flows are 650,003 gpd. The sewer flow shown on this table for the Full Build Remaining Phases includes surplus sewer flow from previous phases (1,257 gpd).