

Latin name	Size	Symbol	Quantity	Note
------------	------	--------	----------	------

Common name				
-------------	--	--	--	--

Trees

Pinus tubuliformis	4-5"		1	
Chinese Pine				

Populous tremuloides	1.5-2"	(PT)	12	
Quaking Aspen				

Betula nigra L.	12'	(BN)	5	Multi-stem
River Birch				

Shrubs

Viburnum carlesii	5Gal.	(VC)	12	
Viburnum "Korean Spice"				

Hydrangea arborescens	3Gal.	(HA)	9	
Hydrangea "Annabelle"				

Ilex verticillata	3Gal.	(IV)	9	
Winterberry Holly				

Itea virginica	3Gal.	(IT)	9	
Virginia Sweetspire				

Perennials


Kalamagrostis a.	1Gal.	(KA)	15	Ornamental
Grass "Karl Foerster"				

Echinacea purpurea	1Gal.	(EP)	15	
Purple Coneflower				

Euonymus f.	Flat/24	(EF)	12	Ground cover
Wintercreeper				group 3/hole

Vinca minor	Flat/24	(VM)	12	Ground cover
Myrtle				group 3/hole

Method

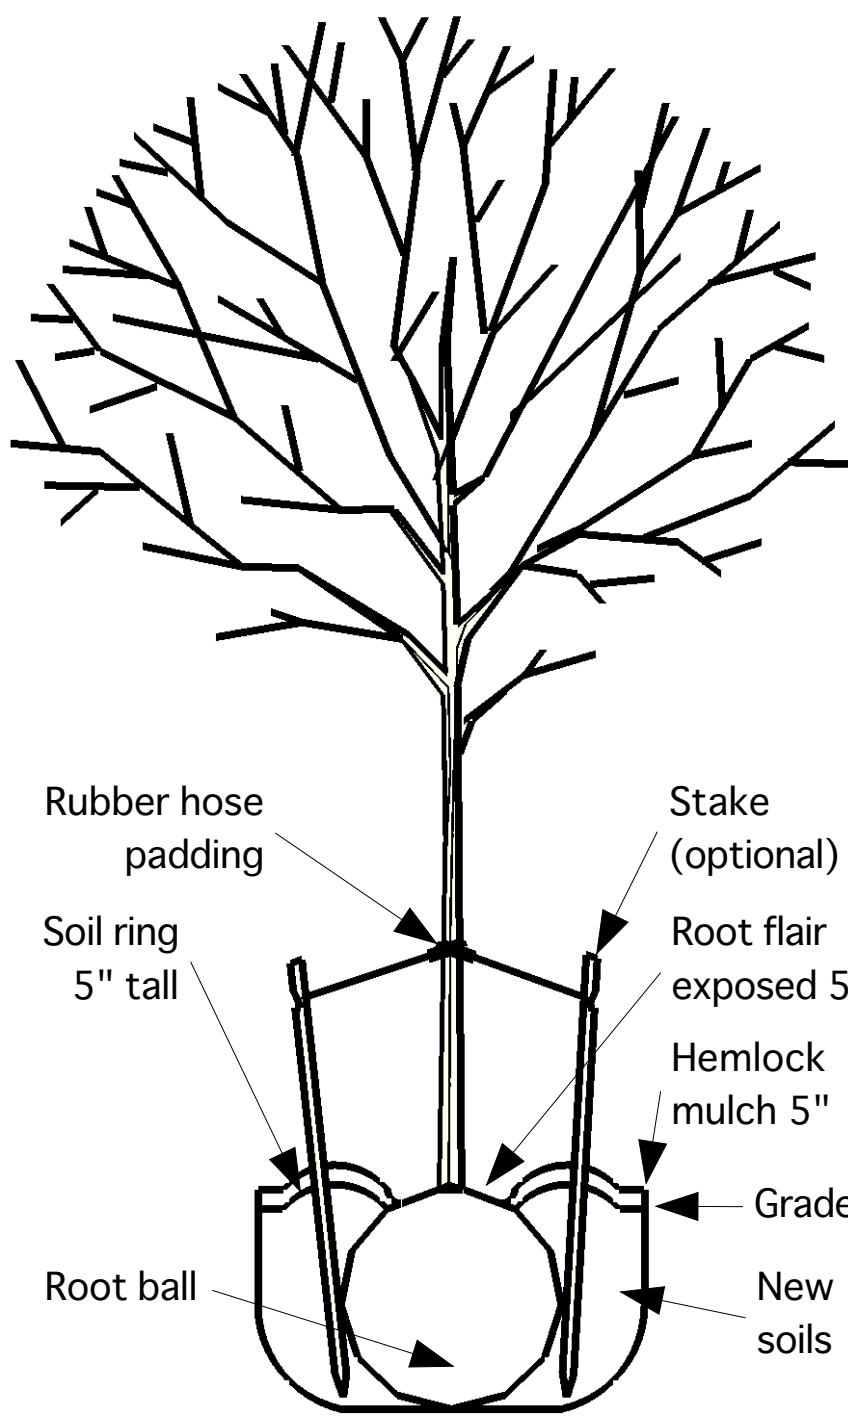

Final selection of nursery stock and inspection of stock upon delivery to be performed by designer or designers agent.

Plan governing positions of plantings indicative of desired positions of trees and shrubs. Field adjustments to location may be necessary depending upon conditions uncovered during planting. Final positions of all trees, shrubs, and perennials to be controlled at time of installation by designer.

Installation methods of plant materials to be performed to vendor supplied specifications and subject to final approval by designer.

Plant materials warranted by vendor.

This landscape plan is predictive of plant material availability, pricing, and optimal health conditions at time of selection and installation. Plant materials of like sizes, quantities, and characteristics may be substituted per designer approval.

It is understood that the entire planting program, including design, is to cost no more than \$20,000. Upon completion, funds not expended are to be contributed to the City for ongoing maintenance of the plantings on the MBTA land.

Landform

